



**CRYOGENIC
2020**

Valves for Cryogenic Applications

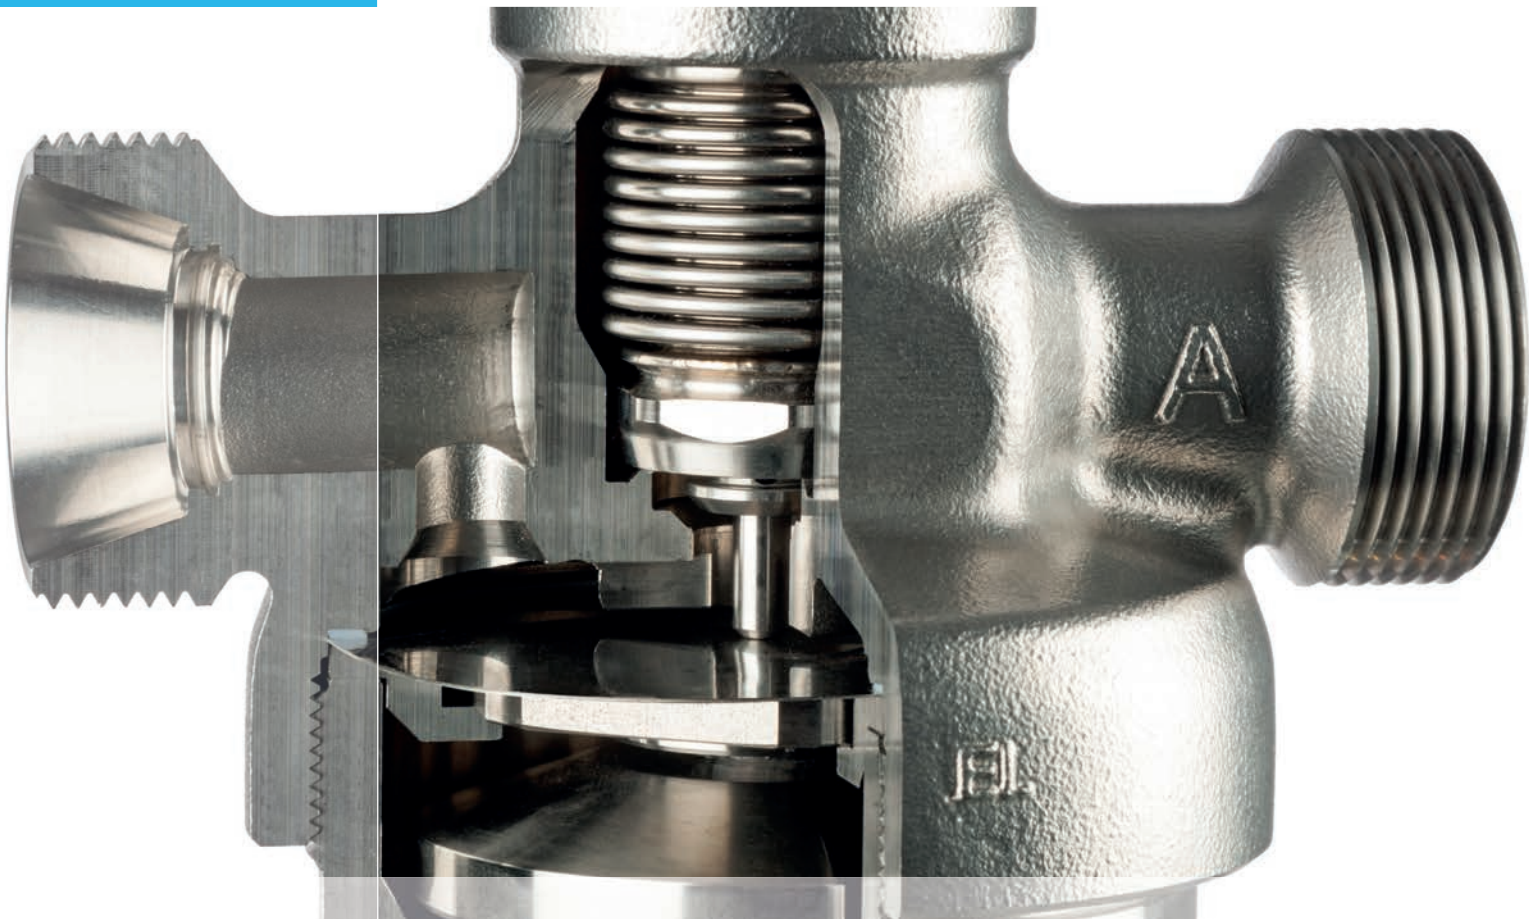

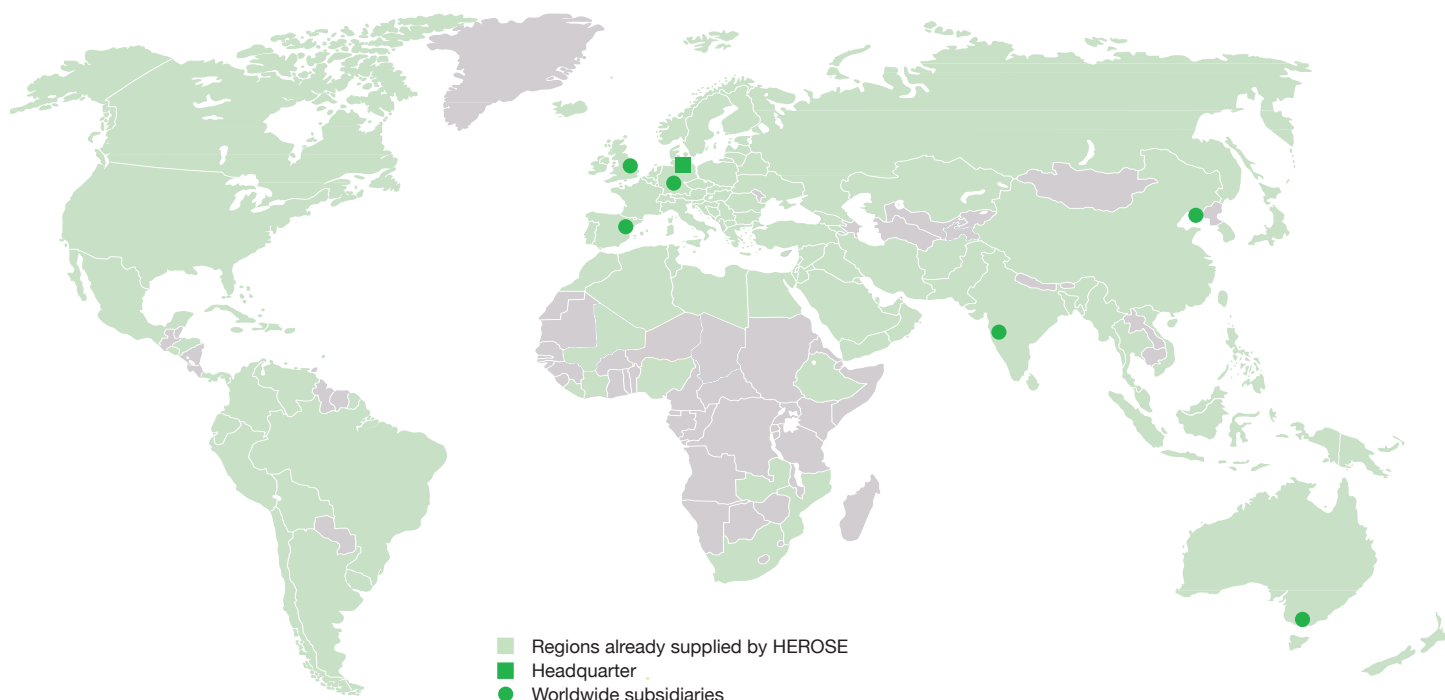

For the addresses of our partners and authorised service centres please visit www.herose.com

Headquarter



HEROSE GMBH ARMATUREN UND METALLE

Elly-Heuss-Knapp-Strasse 12
 23843 Bad Oldesloe
 Germany
 Phone: +49 4531 509-0
 Fax: +49 4531 509-120
info@herose.com

Worldwide subsidiaries

Great Britain HEROSE Ltd.

Finningley/Doncaster
 Phone: +44 1302 773 114
 Fax: +44 1302 773 333
keith.stewart@herose.co.uk
www.herose.co.uk

Spain HEROSE Ibérica S.L.

Barcelona
 Phone: +34 930 028 328
ofertas@herose.es
www.herose.es

P.R. China HEROSE Trading Co., Ltd.

Dalian
 Phone: +86 411 6616 4388
 Fax: +86 411 6616 4399
info@herose.cn
www.herose.cn

Germany LORCH Sicherheitsventile GmbH & Co. KG

Filderstadt-Bernhausen
 Phone: +49 711 22720-400
 Fax: +49 711 22720-488
lorch@lorch.de
www.lorch.de

Australia MACK VALVES Pty Ltd.

Bayswater, Victoria
 Phone: +61 3 9737 5200
scott.gilson@mackvalves.com
www.mackvalves.com

India MACK VALVES India Pvt Ltd.

Pune
 Phone: +91 20 6718 1614
 Mobile: +91 98 1839 0222
sankalp.tiwari@herose.com
www.herose.com

Company	4
Overview of Products	6
Storage and Transportation of Cryogenic Gases	25
Globe Valves	26
Angle Valves	76
Gate Valves	80
Fill Cluster	84
Spare Parts for Valves and Fill Cluster	92
Ball Valves and Spare Parts	114
Actuated Valves and Actuators	120
Accessories for Actuated Valves	154
Spare Parts for Actuated Valves	175
Pressure Regulator	177
Check Valves	182
Spare Parts for Check Valves	200
Strainers	203
Spare Parts for Strainers	221
Safety Valves	222
Overflow Valves	304
Changeover Valves	310
Fire Safe and Offshore Applications	327
Fire Safe Valves	328
Offshore Valves	356
Fire Safe and Offshore Valves	398
Spare Parts for Fire Safe and Offshore Applications	420
General Information	433

Our aim is simple: Perfection.
The result: Products on the very highest level.



Valves for cryogenic liquefied industrial gases

When liquefied at cryogenic temperatures, the volume of industrial gases reduces by a factor of up to 600 and therefore enables economic solutions for transport and storage. Our know-how in the development and manufacture of valves for

cryogenic applications guarantees maximum process reliability in the handling of industrial gases. All components are automatically de-greased and therefore meet the stringent requirements for use with oxygen.

Transport



Industrial gases are liquefied at cryogenic temperatures and transported in special trailer e.g. from the air separation plant to the customer. Thanks to lightweight HEROSE valves, the payload can be increased.

Storage



Depending on the quantity, cryogenic air gases are stored in fixed storage tanks with capacities from 5,000 to 50,000 litres. Compact HEROSE filling modules ensure safe and convenient handling during the filling process.

Processes



For the industrial production of high purity nitrogen, oxygen, argon and other air gases, the individual air components are separated using a thermal process in air separation plants.

The necessary repair and maintenance work in the Cold Box is greatly simplified by the use of HEROSE Top Entry Valves.

HEROSE is one of the worldwide leading manufacturers of valves for industrial applications. For over 145 years we have developed, produced and sold valves for cryogenic technology and pressure vessel construction and set standards for the safe handling of technical gases, vapours and liquids. With a production volume of more than 400,000 valves per year, we are one of the most experienced suppliers in our sector. Our products are in successful use throughout the world.

Our partners in industry and business expect us to supply reliable valves, which meet the high demands of the future. They also expect a sound company and continuous product development from their business partners. These values form the foundation of the HEROSE company philosophy.



Valves for cryogenic liquefied natural gas (LNG)

Natural gas is liquefied at a temperature of -161°C and enables this versatile fuel to be supplied without depending on pipelines. We use our many years of experience in the


field of industrial air gases to provide valves which are optimised for small-scale LNG applications. If required, Fire Safe according to EN ISO 10497.

Transport



Special road trailers are used to transport LNG from the liquid gas storage facility to the users' satellite stations. Because of frequent filling, transportation and unloading, they are subjected to extreme stresses. HEROSE supplies the valves for liquefied natural gas, approved for LNG according to DIN EN 12567.

Storage



Cryogenic liquefied natural gas is stored in small-scale tank storage facilities with capacities from 10,000 to 100,000 m^3 . HEROSE valves have proved themselves in many tank storage filling and removal lines, including for safety-relevant valves, which are fire safe approved according to EN ISO 10497.

Fuelling



The use of LNG as fuel for ships has considerable environmental advantages – lower emissions of carbon dioxide, sulphur dioxide and nitrogen oxides. We offer a wide range of valves for marine installations with extreme demands with regard to fire safety. In addition, we have developed complete solutions for the associated infrastructure.

Processes



To supply customers with natural gas in various aggregate states according to their requirements, increasing numbers of decentralised liquefaction and re-gasification units are being constructed. HEROSE supplies a wide range of valves to cater for the various process requirements.

Storage and Transportation of Cryogenic Gases

Overview of Products



Globe Valves

Type	Nominal size	Connections	Working pressure	Temperature	Page
01301	DN10 - DN50	Socket for copper stubs Socket for stainl. steel stubs	PN50	-196°C - +120°C 77K - 393K	26
01301	DN10 - DN50	Copper stubs	PN50	-196°C - +120°C 77K - 393K	27
01301	DN10 - DN50	Stainless steel stubs	PN50	-196°C - +120°C 77K - 393K	28
01305	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	PN50	-196°C - +120°C 77K - 393K	29
02401	DN10 - DN50	Male thread	PN50	-196°C - +120°C 77K - 393K	30
02401	DN10 - DN50	Union type braze fittings for copper pipe	PN50	-196°C - +120°C 77K - 393K	31
02401	DN10 - DN50	Union type weld fittings for stainless steel pipe	PN50	-196°C - +120°C 77K - 393K	32
01331	DN10 - DN150	Butt weld connection Socket weld connection	PN50 (DN150=PN40)	-196°C - +120°C 77K - 393K	33
01335	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	PN50	-196°C - +120°C 77K - 393K	34
03331	DN15 - DN150	Flanged DIN EN PN40	PN40	-196°C - +120°C 77K - 393K	35
03331	DN15 - DN150	Flanged ANSI class 300	class 300	-196°C - +120°C 77K - 393K	36
03331	DN15 - DN150	Flanged ANSI class 150	class 150	-196°C - +120°C 77K - 393K	37
01351	DN10 - DN150	Butt weld connection, Socket weld connection	PN50 (DN150=PN40)	-196°C - +120°C 77K - 393K	38
01355	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	PN50	-196°C - +120°C 77K - 393K	39
03351	DN15 - DN150	Flanged DIN EN PN40	PN40	-196°C - +120°C 77K - 393K	40
03351	DN15 - DN150	Flanged ANSI class 300	class 300	-196°C - +120°C 77K - 393K	41
03351	DN15 - DN150	Flanged ANSI class 150	class 150	-196°C - +120°C 77K - 393K	42
01311	DN10 - DN50	Socket for copper stubs Socket for stainl. steel stubs	PN50	-196°C - +120°C 77K - 393K	43
01311	DN10 - DN50	Copper stubs	PN50	-196°C - +120°C 77K - 393K	44
01311	DN10 - DN50	Stainless steel stubs	PN50	-196°C - +120°C 77K - 393K	45
01315	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	PN50	-196°C - +120°C 77K - 393K	46
02411	DN10 - DN50	Male thread	PN50	-196°C - +120°C 77K - 393K	47
02411	DN10 - DN50	Union type braze fittings for copper pipe	PN50	-196°C - +120°C 77K - 393K	48
02411	DN10 - DN50	Union type weld fittings for stainless steel pipe	PN50	-196°C - +120°C 77K - 393K	49

Storage and Transportation of Cryogenic Gases

Overview of Products



Globe Valves

Type	Nominal size	Connections	Working pressure	Temperature	Page
01321	DN10 - DN150	Butt weld connection Socket weld connection	PN50 (DN150=PN40)	-196°C - +120°C 77K - 393K	50
01325	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	PN50	-196°C - +120°C 77K - 393K	51
03321	DN15 - DN150	Flanged DIN EN PN16	PN16	-196°C - +120°C 77K - 393K	52
03321	DN15 - DN150	Flanged DIN EN PN40	PN40	-196°C - +120°C 77K - 393K	53
03321	DN15 - DN150	Flanged ANSI class 300	class 300	-196°C - +120°C 77K - 393K	54
03321	DN15 - DN150	Flanged ANSI class 150	class 150	-196°C - +120°C 77K - 393K	55
01341	DN10 - DN150	Butt weld connection, Socket weld connection	PN50 (DN150=PN40)	-196°C - +120°C 77K - 393K	56
01341	DN200	Butt weld connection, Socket weld connection	PN25	-196°C - +120°C 77K - 393K	57
01345	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	PN50	-196°C - +120°C 77K - 393K	58
03341	DN15 - DN150	Flanged DIN EN PN40	PN40	-196°C - +120°C 77K - 393K	59
03341	DN15 - DN150	Flanged ANSI class 300	class 300	-196°C - +120°C 77K - 393K	60
03341	DN15 - DN150	Flanged ANSI class 150	class 150	-196°C - +120°C 77K - 393K	61
03341	DN200	Flanged ANSI class 150	class 150	-196°C - +120°C 77K - 393K	62
01252	DN10 - DN50	Butt weld connection, Socket weld connection	PN50	-196°C - +120°C 77K - 393K	63
03252	DN15 - DN50	Flanged DIN EN PN40	PN40	-196°C - +120°C 77K - 393K	64
03252	DN15 - DN50	Flanged ANSI class 300	class 300	-196°C - +120°C 77K - 393K	65
03252	DN15 - DN50	Flanged ANSI class 150	class 150	-196°C - +120°C 77K - 393K	66
01420	DN10 - DN100	Butt weld connection	PN50 (DN100=PN40)	-196°C - +120°C 77K - 393K	67
1114	DN15 - DN50	Butt weld connection Socket weld connection	PN50	-196°C - +120°C 77K - 393K	68-70
1116	DN15 - DN50	Butt weld connection Socket weld connection	PN50	-196°C - +120°C 77K - 393K	71-73
11C01	DN25 - DN50	Butt weld connection	PN63	-269°C - +80°C 4K - 353K	74/75

Storage and Transportation of Cryogenic Gases

Overview of Products



Angle Valves

Type	Nominal size	Connections	Working pressure	Temperature	Page
01332	DN15 - DN50	Butt weld connection Socket weld connection	PN50	-196°C - +120°C 77K - 393K	76
01352	DN15 - DN50	Butt weld connection Socket weld connection	PN50	-196°C - +120°C 77K - 393K	77
01322	DN15 - DN50	Butt weld connection Socket weld connection	PN50	-196°C - +120°C 77K - 393K	78
01342	DN15 - DN50	Butt weld connection Socket weld connection	PN50	-196°C - +120°C 77K - 393K	79

Gate Valves

Type	Nominal size	Connections	Working pressure	Temperature	Page
09340	DN25 - DN100	Butt weld connection, Socket weld connection	PN50	-196°C - +120°C 77K - 393K	80
09345	DN25 - DN65	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	PN50	-196°C - +120°C 77K - 393K	81
09440	DN25 - DN65	Male thread for union connection	PN50	-196°C - +120°C 77K - 393K	82
09440	DN25 - DN65	Union type butt weld fittings	PN50	-196°C - +120°C 77K - 393K	83

Fill Cluster

Type	Nominal size	Connections	Working pressure	Temperature	Page
07003	DN25 - DN40	Inlet: female thread Outlet: 2x stainless steel pipes	PN50	-196°C - +120°C 77K - 393K	84
07004	DN25 - DN40	Inlet: Mueller flange Outlet: 2x stainless steel pipes	PN50	-196°C - +120°C 77K - 393K	85
07015	DN25 - DN40	Inlet: Air Liquide flange Outlet: socket weld conn.	PN50	-196°C - +120°C 77K - 393K	86
07015	DN25 - DN40	Inlet: Air Liquide flange Outlet: socket weld conn.	PN50	-196°C - +120°C 77 conn.K - 393K	87
07012	DN25 - DN40	Inlet: Flange DIN EN PN40 Outlet: socket weld conn.	PN40	-196°C - +120°C 77K - 393K	88
07017	DN25 - DN40	Inlet: Air Liquide flange Outlet: socket weld conn.	PN50	-196°C - +120°C 77K - 393K	89
07017	DN25 - DN40	Inlet: Air Liquide flange Outlet: socket weld conn.	PN50	-196°C - +120°C 77K - 393K	90
070XX	DN25 - DN40	Flow rates Fill Cluster			91

Storage and Transportation of Cryogenic Gases

Overview of Products



Spare Parts for Valves and Fill Cluster

Type	Specification	Nominal size	Suitable for Valve type	Page
28203	Disc complete, brass	DN10 - DN150	01301, 01305, 01311, 01315, 01321, 01322, 01325, 01331, 01332, 01335, 01420, 01423, 02401, 02411, 03321, 03331	92
28203	Disc complete, stainless steel	DN10 - DN200	01341, 01342, 01345, 01351, 01352, 01353, 01355, 03341, 03351	92
28203	Check disc complete, brass	DN10 - DN150	01301, 01305, 01311, 01315, 01321, 01322, 01325, 01331, 01332, 01335, 02401, 02411, 03321, 03331	93
28205	Check disc complete, stainless steel	DN10 - DN150	01341, 01342, 01345, 01351, 01352, 01355, 03341, 03351	93
29240	Disc complete, brass	DN25 - DN100	09340, 09343, 09345, 09440, 09443	94
29256	Wedge complete	DN25 - DN100	09340, 09343, 09345, 09440, 09443	95
28301	Topwork, bronze	DN10 - DN150	01301, 01305, 01331, 01335, 02401, 03331	96
28351	Topwork, stainless steel	DN10 - DN150	01351, 01355, 03351	97
28311	Topwork, bronze	DN10 - DN150	01311, 01315, 01321, 01325, 02411, 03321, 07003, 07004	98
28341	Topwork, stainless steel	DN10 - DN200	01341, 01345, 03341	99
28302	Topwork angle type, bronze	DN15 - DN50	01332	100
28352	Topwork angle type, stainless steel	DN15 - DN50	01352	101
28312	Topwork angle type, bronze	DN15 - DN50	01322, 07003, 07004, 07015	102
28342	Topwork angle type, stainless steel	DN15 - DN50	01342, 07017	103
29340	Topwork gate valve, stainless steel	DN25 - DN100	09340	104
30000	Sealing spare part kit	DN10 - DN150	01301, 01305, 01311, 01315, 01321, 01322, 01325, 01331, 01332, 01335, 01353, 02401, 02411, 03321, 03331	105
30290	Sealing spare part kit	DN25 - DN100	09340, 09345, 09440	106
30293	Sealing spare part kit	DN25 - DN100	09343, 09443	107
30001, 30002, 30341, 30343	Sealing spare part kit	DN10 - DN200	01341, 01342, 01343, 01345, 01351, 01352, 01355, 01420, 01423, 03341, 03343, 03351	108
30353	Sealing spare part kit	DN20 - DN80	01353	109
31514	Disc sealing spare part kit	DN10 - DN150	01301, 01305, 01311, 01315, 01321, 01322, 01325, 01331, 01332, 01335, 01341, 01342, 01345, 01351, 01352, 01355, 02401, 02411, 03321, 03331, 03341, 03351	110
55317, 55318	Handwheel	DN10 - DN200	all manually operated valves	111
55579	Valve safety catch capsule	DN15 - DN150	all manually operated valves	112
66394	Alcatraz valve locking	DN10 - DN200	all manually operated valves	113

Storage and Transportation of Cryogenic Gases

Overview of Products



Ball Valves and Spare Parts

Type	Nominal size	Connections	Working pressure	Temperature	Page
15C01	DN15 - DN50	Socket weld connection, Butt weld connection Thread type NPT Thread type BSPT	PN50	-196°C - +65°C 77K - 338K	114
15C01	DN15 - DN50	-	PN50	-196°C - +65°C 77K - 338K	116
15C01	DN15 - DN50	-	PN50	-196°C - +65°C 77K - 338K	117
15C01	DN15 - DN50	-	PN50	-196°C - +65°C 77K - 338K	118
15C01	DN15 - DN50	-	PN50	-196°C - +65°C 77K - 338K	119

Actuated Valves

Type	Nominal size	Connections	Working pressure	Temperature	Page
01313	DN10 - DN50	Socket for copper stubs Socket for stainl. steel stubs	PN50	-196°C - +120°C 77K - 393K	120
01313	DN10 - DN50	Stainless steel stubs	PN50	-196°C - +120°C 77K - 393K	121
01314	DN10 - DN50	Thread type G, Thread type NPT	PN50	-196°C - +120°C 77K - 393K	122
02413	DN10 - DN50	Male thread	PN50	-196°C - +120°C 77K - 393K	123
01343	DN10 - DN150	Butt weld connection, Socket weld connection	PN50 (DN150=PN40)	-196°C - +120°C 77K - 393K	124
01343	DN10 - DN150	Butt weld connection, Socket weld connection, Thread type G (BSPP) Thread type NPT	PN50 (DN150=PN40)	-196°C - +120°C 77K - 393K	125-127
01343	DN200	Butt weld connection, Socket weld connection	PN25	-196°C - +120°C 77K - 393K	128
01344	DN10 - DN50	Thread type G, Thread type NPT	PN50	-196°C - +120°C 77K - 393K	129

Storage and Transportation of Cryogenic Gases

Overview of Products



Actuated Valves

Type	Nominal size	Connections	Working pressure	Temperature	Page
03323	DN15 - DN150	Flanged DIN EN PN16	PN16	-196°C - +120°C 77K - 393K	130
03323	DN15 - DN150	Flanged DIN EN PN40	PN40	-196°C - +120°C 77K - 393K	131
03323	DN15 - DN150	Flanged ANSI class 300	class 300	-196°C - +120°C 77K - 393K	132
03323	DN15 - DN150	Flanged ANSI class 150	class 150	-196°C - +120°C 77K - 393K	133
03343	DN15 - DN150	Flanged DIN EN PN16	PN16	-196°C - +120°C 77K - 393K	134
03343	DN15 - DN150	Flanged DIN EN PN40	PN40	-196°C - +120°C 77K - 393K	135
03343	DN15 - DN150	Flanged ANSI class 300	class 300	-196°C - +120°C 77K - 393K	136
03343	DN15 - DN150	Flanged ANSI class 150	class 150	-196°C - +120°C 77K - 393K	137
03343	DN200	Flanged ANSI class 150	class 150	-196°C - +120°C 77K - 393K	138
01343	DN15 - DN100	Butt weld connection, Socket weld connection	PN50	-196°C - +120°C 77K - 393K	139/140
01423	DN10 - DN100	Butt weld connection	PN50	-196°C - +120°C 77K - 393K	141
27100	DN10 - DN150	Electric actuator for globe valves		-20°C - +60°C 253K - 333K	142
27511	DN10 - DN150	Pneumatic actuator for globe valves, spring to close		-20°C - +80°C 253K - 353K	143
27511	DN10 - DN150	Pneumatic actuator for control valves, spring to close		-20°C - +80°C 253K - 353K	144
27512	DN10 - DN150	Pneumatic actuator for globe valves, spring to open		-20°C - +80°C 253K - 353K	145
27512	DN10 - DN150	Pneumatic actuator for control valves, spring to open		-20°C - +80°C 253K - 353K	146
27514	DN10 - DN150	Pneumatic actuator for globe valves, spring to close		-40°C - +100°C 233K - 373K	147
27514	DN10 - DN150	Pneumatic actuator for control valves, spring to close		-40°C - +100°C 233K - 373K	148
27515	DN10 - DN150	Pneumatic actuator for globe valves, spring to open		-40°C - +100°C 233K - 373K	149
27515	DN10 - DN150	Pneumatic actuator for control valves, spring to open		-40°C - +100°C 233K - 373K	150
01353	DN20 - DN80	Butt weld connection, Socket weld connection	PN50	-196°C - +120°C 77K - 393K	151
09343	DN25 - DN100	Butt weld connection, Socket weld connection	PN50	-196°C - +120°C 77K - 393K	152
09443	DN25 - DN65	Male thread for union connection	PN50	-196°C - +120°C 77K - 393K	153

Storage and Transportation of Cryogenic Gases

Overview of Products



Accessories for Actuated Valves

Type	Specification	Temperature	Page
40060	Solenoid valve	-30°C - +90°C 243K - 363K	154
41060	Solenoid valve	-30°C - +90°C 243K - 363K	155
41060	Solenoid valve, suitable for oxygen	0°C - +90°C 273K - 363K	156
40061	Solenoid valve EEx	0°C - +80°C 273K - 353K	157
41061	Solenoid valve EEx	0°C - +80°C 273K - 353K	158
40070, 40071	Position and limit switches	-20°C - +80°C 253K - 353K	159
41070, 41071	Position and limit switches	-20°C - +80°C 253K - 353K	160
40080	Inductive proximity switches	-25°C - +70°C 248K - 343K	161
41080	Inductive proximity switches	-25°C - +70°C 248K - 343K	162
08002	Air control sets	-10°C - +60°C 263K - 333K	163
08003	Air control sets	-60°C - +90°C 213K - 363K	164
40090	Electropneumatic positioner	-30°C - +80°C 243K - 353K	165
41090	Electropneumatic positioner	-30°C - +80°C 243K - 353K	166
40091	Electropneumatic positioner EEx	-30°C - +50°C 243K - 323K	167
41091	Electropneumatic positioner EEx	-30°C - +50°C 243K - 323K	168
40090	Pneumatic positioner	-40°C - +80°C 233K - 353K	169
41090	Pneumatic positioner	-40°C - +80°C 233K - 353K	170
40281	Inductive proximity switches EEx-box	-40°C - +80°C 233K - 353K	171
41281	Inductive proximity switches EEx-box	-40°C - +80°C 233K - 353K	172
55177	Weather protection hood	-196°C - +120°C 77K - 393K	173
74394	Bracket for accessories	-196°C - +120°C 77K - 393K	174

Spare Parts for Actuated Valves

Type	Specification	Nominal size	Suitable for Valve type	Page
29343	Topwork gate valve, stainless steel	DN25 - DN100	09343, 09443	175
30003	Spare part kit	DN20 - DN100	01353, 01653, 01753, 01853, 09343, 09443	176

Storage and Transportation of Cryogenic Gases

Overview of Products

HEROSE



Pressure Regulator

Type	Nominal size	Connections	Working pressure	Temperature	Page
4182	DN20	Male thread Thread type G (BSPP) Thread type NPT	PN50	-196°C - +200°C 77K - 473K	177
4186	DN20	Male thread Thread type G (BSPP) Thread type NPT	PN50	-196°C - +200°C 77K - 473K	178/180
T118	DN20	Male thread	PN50	-196°C - +60°C 77K - 333K	181

Check Valves

Type	Nominal size	Connections	Opening pressure	Working pressure	Temperature	Page
05412	DN10 - DN50	Socket for copper stubs Socket for stainl. steel stubs	ca. 0,1 bar	PN50	-196°C - +120°C 77K - 393K	182
05412	DN10 - DN50	Copper stubs	ca. 0,1 bar	PN50	-196°C - +120°C 77K - 393K	183
05412	DN10 - DN50	Stainless steel stubs	ca. 0,1 bar	PN50	-196°C - +120°C 77K - 393K	184
05413	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	ca. 0,1 bar	PN50	-196°C - +120°C 77K - 393K	185
05411	DN10 - DN50	Male thread	ca. 0,1 bar	PN50	-196°C - +120°C 77K - 393K	186
05411	DN10 - DN50	Union type braze fittings for copper pipe	ca. 0,1 bar	PN50	-196°C - +120°C 77K - 393K	187
05411	DN10 - DN50	Union type weld fittings for stainless steel pipe	ca. 0,1 bar	PN50	-196°C - +120°C 77K - 393K	188
05416	DN10 - DN150	Butt weld connection, Socket weld connection	ca. 0,1 bar	PN50 (DN150=PN40)	-196°C - +120°C 77K - 393K	189
05415	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	ca. 0,1 bar	PN50	-196°C - +120°C 77K - 393K	190
05418	DN15 - DN150	Flanged DIN EN PN40	ca. 0,1 bar	PN40	-196°C - +120°C 77K - 393K	191
05418	DN15 - DN150	Flanged ANSI class 300	ca. 0,1 bar	class 300	-196°C - +120°C 77K - 393K	192
05418	DN15 - DN150	Flanged ANSI class 150	ca. 0,1 bar	class 150	-196°C - +120°C 77K - 393K	193
05414	DN10 - DN150	Butt weld connection, Socket weld connection	ca. 0,1 bar	PN50 (DN150=PN40)	-196°C - +120°C 77K - 393K	194
05414	DN200	Socket weld connection	ca. 0,1 bar	PN25	-196°C - +120°C 77K - 393K	195
05417	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	ca. 0,1 bar	PN50	-196°C - +120°C 77K - 393K	196
05419	DN15 - DN150	Flanged DIN EN PN40	ca. 0,1 bar	PN40	-196°C - +120°C 77K - 393K	197
05419	DN15 - DN150	Flanged ANSI class 300	ca. 0,1 bar	class 300	-196°C - +120°C 77K - 393K	198
05419	DN15 - DN150	Flanged ANSI class 150	ca. 0,1 bar	class 150	-196°C - +120°C 77K - 393K	199

Storage and Transportation of Cryogenic Gases

Overview of Products



Spare Parts for Check Valves

Type	Specification	Nominal size	Suitable for Valve type	Page
28205	Check disc complete, brass	DN10 - DN150	05411, 05412, 05413, 05415, 05416, 05418	200
28206	Check disc complete, stainless steel	DN10 - DN150	05414, 05417, 05419	200
30514	Sealing spare part kit	DN10 - DN150	05411, 05412, 05413, 05414, 05415, 05416, 05417, 05418, 05419	201
31514	Disc sealing spare part kit	DN10 - DN100	05411, 05412, 05413, 05414, 05415, 05416, 05417, 05418, 05419	202

Strainers

Type	Nominal size	Connections	Mesh size	Working pressure	Temperature	Page
08411	DN10 - DN50	Male thread	0,25 mm	PN50	-196°C - +120°C 77K - 393K	203
08411	DN10 - DN50	Union type braze fittings for copper pipe	0,25 mm	PN50	-196°C - +120°C 77K - 393K	204
08411	DN10 - DN50	Union type weld fittings for stainless steel pipe	0,25 mm	PN50	-196°C - +120°C 77K - 393K	205
08412	DN10 - DN50	Socket for copper stubs Socket for stainl. steel stubs	0,25 mm	PN50	-196°C - +120°C 77K - 393K	206
08412	DN10 - DN50	Copper stubs	0,25 mm	PN50	-196°C - +120°C 77K - 393K	207
08412	DN10 - DN50	Stainless steel stubs	0,25 mm	PN50	-196°C - +120°C 77K - 393K	208
08413	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	0,25 mm	PN50	-196°C - +120°C 77K - 393K	209
08414	DN10 - DN150	Butt weld connection, Socket weld connection	0,25 mm	PN50 (DN150=PN40)	-196°C - +120°C 77K - 393K	210
08415	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	0,25 mm	PN50	-196°C - +120°C 77K - 393K	211

Storage and Transportation of Cryogenic Gases

Overview of Products



Strainers

Type	Nominal size	Connections	Mesh size	Working pressure	Temperature	Page
08431	DN15 - DN150	Flanged DIN EN PN40	0,25 mm	PN40	-196°C - +120°C 77K - 393K	212
08431	DN15 - DN150	Flanged ANSI class 300	0,25 mm	class 300	-196°C - +120°C 77K - 393K	213
08431	DN15 - DN150	Flanged ANSI class 150	0,25 mm	class 150	-196°C - +120°C 77K - 393K	214
08417	DN10 - DN150	Butt weld connection, Socket weld connection	0,25 mm	PN50 (DN150=PN40)	-196°C - +120°C 77K - 393K	215
08417	DN200	Socket weld connection	0,25 mm	PN25	-196°C - +120°C 77K - 393K	216
08416	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	0,25 mm	PN50	-196°C - +120°C 77K - 393K	217
08432	DN15 - DN150	Flanged DIN EN PN40	0,25 mm	PN40	-196°C - +120°C 77K - 393K	218
08432	DN15 - DN150	Flanged ANSI class 300	0,25 mm	class 300	-196°C - +120°C 77K - 393K	219
08432	DN15 - DN150	Flanged ANSI class 150	0,25 mm	class 150	-196°C - +120°C 77K - 393K	220

Spare Parts for Strainers

Type	Specification	Nominal size	Suitable for Valve type	Page
30800, 30801	Strainer screen, Filter	DN10 - DN200	08412, 08413, 08414, 08415, 08416, 08417, 08431, 08432, 08716, 08717	221

Storage and Transportation of Cryogenic Gases

Overview of Products



Abbreviations: in column Medium - type tested for
S = Steams, **G** = Gases, **L** = Liquids

Safety Valves

Type	Orifice d ₀	Inlet	Medium	Temperature	Set pressure range	Approval TÜV-SV	ASME	Page
06001 gastight	6.0	Male thread 1/4" up to 1/2"	S/G/L	-196°C - +65°C 77K - 338K	5,0 - 55,0 bar 72,5 - 797,7 PSI	1048		222/223
06002, 06006	6.0	Male thread 1/4" up to 1/2"	S/G	-196°C - +150°C 77K - 423K	1,0 - 55,0 bar 14,5 - 797,7 PSI	1048	✓	224/225
06002 gastight	6.0	Male thread 1/4" up to 1/2"	S/G	-196°C - +150°C 77K - 423K	1,0 - 55,0 bar 14,5 - 797,7 PSI	1048	✓	226/227
06011 gastight	6.0	Male thread 1/4" up to 1/2"	S/G/L	-196°C - +65°C 77K - 338K	5,0 - 55,0 bar 72,5 - 797,7 PSI	1048		228/229
06012, 06016	6.0	Male thread 1/4" up to 1/2"	S/G	-196°C - +150°C 77K - 423K	1,0 - 55,0 bar 14,5 - 797,7 PSI	1048	✓	230/231
06012 gastight	6.0	Male thread 1/4" up to 1/2"	S/G	-196°C - +150°C 77K - 423K	1,0 - 55,0 bar 14,5 - 797,7 PSI	1048	✓	232/233
06474	6.0	Male thread 1/4" up to 3/4"	S/G	-196°C - +150°C 77K - 423K	0,4 - 55,0 bar 5,8 - 797,7 PSI	836		234/235
06478	6.0	Male thread 1/4" up to 3/4"	S/G	-196°C - +150°C 77K - 423K	0,4 - 55,0 bar 5,8 - 797,7 PSI	836		236/237
06386	10.5 - 14.0	Male thread 1/2" up to 1"	S/G	-196°C - +185°C 77K - 458K	0,2 - 40,0 bar 2,9 - 580,1 PSI	780	✓	238/239
06416	10.5 - 14.0	Male thread 1/2" up to 1"	S/G	-196°C - +185°C 77K - 458K	0,2 - 40,0 bar 2,9 - 580,1 PSI	780	✓	240/241
06387	10.5	Female thread 1/2"	S/G	-196°C - +185°C 77K - 458K	0,2 - 25,0 bar 2,9 - 362,6 PSI	780		242/243
06417	10.5	Female thread 1/2"	S/G	-196°C - +185°C 77K - 458K	0,2 - 25,0 bar 2,9 - 362,6 PSI	780		244/245
06388	7.0 - 23.0	Male thread 1/2" up to 2"	S/G	-196°C - +185°C 77K - 458K	2,0 - 50,0 bar 29,0 - 725,1 PSI	780	✓	246-249
06418	7.0 - 23.0	Male thread 1/2" up to 2"	S/G	-196°C - +185°C 77K - 458K	2,0 - 50,0 bar 29,0 - 725,1 PSI	780	✓	250-253
06381	10.5	Male thread 1/2" up to 3/4"	S/G	-196°C - +185°C 77K - 458K	0,2 - 25,0 bar 2,9 - 362,6 PSI	780	✓	254/255
06383	7.0 - 23.0	Male thread 1/2" up to 2"	S/G	-196°C - +185°C 77K - 458K	2,0 - 50,0 bar 29,0 - 725,1 PSI	780	✓	256/257
06413	7.0 - 23.0	Male thread 1/2" up to 2"	S/G	-196°C - +185°C 77K - 458K	2,0 - 50,0 bar 29,0 - 725,1 PSI	780	✓	258/259
06420	7.0 - 23.0	Male thread 1/2" up to 1-1/4"	S/G	-196°C - +185°C 77K - 458K	0,4 - 50,0 bar 5,8 - 725,1 PSI	1111	✓	260/261
06425	7.0 - 23.0	Male thread 1/2" up to 1-1/4"	S/G	-196°C - +185°C 77K - 458K	0,4 - 50,0 bar 5,8 - 725,1 PSI	1111	✓	262/263
06421	7.0 - 23.0	Female thread 1/2" up to 1-1/4"	S/G	-196°C - +185°C 77K - 458K	0,4 - 50,0 bar 5,8 - 725,1 PSI	1111	✓	264/265
06426	7.0 - 23.0	Female thread 1/2" up to 1-1/4"	S/G	-196°C - +185°C 77K - 458K	0,4 - 50,0 bar 5,8 - 725,1 PSI	1111	✓	266/267

Storage and Transportation of Cryogenic Gases

Overview of Products



Safety Valves

Type	Orifice d ₀	Inlet	Medium	Temperature	Set pressure range	Approval		Page
						TÜV-SV	ASME	
06440	7.0 - 23.0	Male thread 1/2" up to 1-1/4"	S/G	-196°C - +185°C 77K - 458K	0,4 - 50,0 bar 5,8 - 725,1 PSI	1111	✓	268/269
06445	7.0 - 23.0	Male thread 1/2" up to 1-1/4"	S/G	-196°C - +185°C 77K - 458K	0,4 - 50,0 bar 5,8 - 725,1 PSI	1111	✓	270/271
06441	7.0 - 23.0	Female thread 1/2" up to 1-1/4"	S/G	-196°C - +185°C 77K - 458K	0,4 - 50,0 bar 5,8 - 725,1 PSI	1111	✓	272/273
06446	7.0 - 23.0	Female thread 1/2" up to 1-1/4"	S/G	-196°C - +185°C 77K - 458K	0,4 - 50,0 bar 5,8 - 725,1 PSI	1111	✓	274/275
06801	12.5 - 23.0	Male thread 1/2" up to 1"	S/G/L d ₀ =12,5 S/G	-270°C - +225°C 3K - 498K	3,0 - 25,0 bar 43,5 - 362,6 PSI	1105		276/277
06806	12.5 - 23.0	Male thread 1/2" up to 1"	S/G/L d ₀ =12,5 S/G	-270°C - +225°C 3K - 498K	3,0 - 25,0 bar 43,5 - 362,6 PSI	1105		278/279
06800	12.5 - 23.0	Female thread 1/2" up to 1"	S/G/L d ₀ =12,5 S/G	-270°C - +225°C 3K - 498K	3,0 - 25,0 bar 43,5 - 362,6 PSI	1105		280/281
06805	12.5 - 23.0	Female thread 1/2" up to 1"	S/G/L d ₀ =12,5 S/G	-270°C - +225°C 3K - 498K	3,0 - 25,0 bar 43,5 - 362,6 PSI	1105		282/283
06810, 06815	6.0 - 10.0	Male thread 1/2" up to 3/4"	S/G/L	-270°C - +400°C 3K - 673K	0,5 - 550,0 bar 7,3 - 7977,0 PSI	1130		284-291
06820	6.0	Male thread 3/4"	S/G/L	-270°C - +400°C 3K - 673K	30,0 - 550,0 bar 435,1 - 7977,0 PSI	1130		292/293
06850, 06855	10.0 - 18.0	Male thread 1/2" up to 1-1/2"	S/G/L	-270°C - +400°C 3K - 673K	0,5 - 250,0 bar 7,3 - 3626,0 PSI	1130		294-302
55335		Female thread 3/8" up to 1"	-	-270°C - +225°C 3K - 498K	-	-		303

Overflow Valves

Type	Orifice d ₀	Inlet	Medium	Temperature	Set pressure range	Approval		Page
						TÜV-SV	ASME	
06386	10.5	Male thread 1/2" up to 3/4"	S/G	-196°C - +185°C 77K - 458K	0,5 - 35,0 bar 7,3 - 507,6 PSI	-		304/305
06381	10.5	Male thread 1/2" up to 3/4"	S/G/L	-196°C - +185°C 77K - 458K	0,5 - 35,0 bar 7,3 - 507,6 PSI	-		306/307
06001	6.0	Male thread 1/2"	S/G/L	-196°C - +65°C 77K - 338K	11,0 - 36,0 bar 159,5-522,1 PSI	-		308/309

Storage and Transportation of Cryogenic Gases

Overview of Products



Changeover Valves

Type	Nominal size	Inlet	Outlet	Temperature	Working pressure	Page
06510	DN20	Female thread 1"	Female thread 1/2" up to 3/4"	-196°C - +120°C 77K - 393K	PN 50	310
06510	DN20	Union type braze/weld fittings	Female thread 1/2" up to 3/4"	-196°C - +120°C 77K - 393K	PN 50	311
06510	DN32	Female thread 1-1/2"	Female thread 1" up to 1-1/2"	-196°C - +120°C 77K - 393K	PN 50	312
06512	DN20	Female thread 1"	Female thread 1/2" up to 3/4"	-196°C - +120°C 77K - 393K	PN 50	313
06520	DN20	Female thread 1"	Female thread 1/2" up to 3/4"	-196°C - +120°C 77K - 393K	PN 50	314
06530	DN20	Female thread 1"	Female thread 1/2" up to 3/4"	-196°C - +120°C 77K - 393K	PN 50	315
7111	DN32	Female thread 1" up to 1-1/2"	Female thread 1/2" up to 1"	-196°C - +120°C 77K - 393K	PN 50	316
06405	DN15 DN25	Female thread 3/4" up to 1"	Female thread 1/2" up to 1"	-196°C - +185°C 77K - 458K	DN15: PN 40 DN25: PN 45	318
06401	DN15	Locking sleeve Female thread	Locking sleeve Female thread Flanged	-196°C - +185°C 77K - 458K	PN 125 (up to max. PN250)	319
06401	DN15	Flanged	Locking sleeve Female thread Flanged	-196°C - +185°C 77K - 458K	PN 160 (up to max. PN 250)	320
06401	DN25	Locking sleeve Female thread	Locking sleeve Female thread Flanged	-196°C - +185°C 77K - 458K	PN 125 (up to max. PN250)	321
06401	DN25	Flanged	Locking sleeve Female thread Flanged	-196°C - +185°C 77K - 458K	PN 160 (up to max. PN 250)	322
06401	DN15 DN25	Locking sleeve, Female thread, Flanged	Locking sleeve, Female thread, Flanged	-196°C - +185°C 77K - 458K	PN 63 (up to max. PN 100)	323
06900	1/2"	Male thread	-	-196°C - +120°C 77K - 393K	-	324
06901	1/2"	Male thread	-	-196°C - +120°C 77K - 393K	-	325

Fire Safe and Offshore Applications

Overview of Products



Fire Safe Valves

Type	Nominal size	Connections	Working pressure	Temperature	Page
01651	DN10 - DN100	Butt weld connection, Socket weld connection	PN50	-196°C - +120°C 77K - 393K	328
01655	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	PN50	-196°C - +120°C 77K - 393K	329
03651	DN15 - DN150	Flanged DIN EN PN40	PN40	-196°C - +120°C 77K - 393K	330
03651	DN15 - DN150	Flanged ANSI class 300	class 300	-196°C - +120°C 77K - 393K	331
03651	DN15 - DN150	Flanged ANSI class 150	class 150	-196°C - +120°C 77K - 393K	332
01641	DN10 - DN150	Butt weld connection, Socket weld connection	PN50 (DN150=PN40)	-196°C - +120°C 77K - 393K	333
01641	DN200	Butt weld connection, Socket weld connection	PN25	-196°C - +120°C 77K - 393K	334
01645	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	PN50	-196°C - +120°C 77K - 393K	335
03641	DN15 - DN150	Flanged DIN EN PN40	PN40	-196°C - +120°C 77K - 393K	336
03641	DN15 - DN150	Flanged ANSI class 300	class 300	-196°C - +120°C 77K - 393K	337
03641	DN15 - DN150	Flanged ANSI class 150	class 150	-196°C - +120°C 77K - 393K	338
03641	DN200	Flanged ANSI class 150	class 150	-196°C - +120°C 77K - 393K	339
01262	DN10 - DN50	Butt weld connection, Socket weld connection	PN50	-196°C - +120°C 77K - 393K	340
1116F	DN15 - DN50	Butt weld connection Socket weld connection	PN50	-196°C - +120°C 77K - 393K	341-343

Fire Safe and Offshore Applications

Overview of Products



Fire Safe Valves

Type	Nominal size	Connections	Working pressure	Temperature	Page
01643	DN10 - DN150	Butt weld connection, Socket weld connection	PN50 (DN150=PN40)	-196°C - +120°C 77K - 393K	344
01643	DN10 - DN150	Butt weld connection, Socket weld connection, Thread type G (BSPP) Thread type NPT	PN50 (DN150=PN40)	-196°C - +120°C 77K - 393K	345-347
01643	DN200	Butt weld connection, Socket weld connection	PN25	-196°C - +120°C 77K - 393K	348
03643	DN15 - DN150	Flanged DIN EN PN16	PN16	-196°C - +120°C 77K - 393K	349
03643	DN15 - DN150	Flanged DIN EN PN40	PN40	-196°C - +120°C 77K - 393K	350
03643	DN15 - DN150	Flanged ANSI class 300	class 300	-196°C - +120°C 77K - 393K	351
03643	DN15 - DN150	Flanged ANSI class 150	class 150	-196°C - +120°C 77K - 393K	352
03643	DN200	Flanged ANSI class 150	class 150	-196°C - +120°C 77K - 393K	353
01653	DN20 - DN80	Butt weld connection, Socket weld connection	PN50	-196°C - +120°C 77K - 393K	354
05614	DN10 - DN150	Butt weld connection, Socket weld connection	PN50 (DN150=PN40)	-196°C - +120°C 77K - 393K	355

Fire Safe and Offshore Applications

Overview of Products



Offshore Valves

Type	Nominal size	Connections	Working pressure	Temperature	Page
01751	DN10 - DN100	Butt weld connection, Socket weld connection	PN50	-255°C - +120°C 18K - 393K	356
01755	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	PN50	-255°C - +120°C 18K - 393K	357
03751	DN15 - DN150	Flanged DIN EN PN16	PN16	-255°C - +120°C 18K - 393K	358
03751	DN15 - DN150	Flanged DIN EN PN40	PN40	-255°C - +120°C 18K - 393K	359
03751	DN15 - DN150	Flanged ANSI class 300	class 300	-255°C - +120°C 18K - 393K	360
03751	DN15 - DN150	Flanged ANSI class 150	class 150	-255°C - +120°C 18K - 393K	361
01741	DN10 - DN150	Butt weld connection, Socket weld connection	PN50 (DN150=PN40)	-255°C - +120°C 18K - 393K	362
01741	DN200	Butt weld connection, Socket weld connection	PN25	-196°C - +120°C 77K - 393K	363
01745	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	PN50	-255°C - +120°C 18K - 393K	364
03741	DN15 - DN150	Flanged DIN EN PN16	PN16	-255°C - +120°C 18K - 393K	365
03741	DN15 - DN150	Flanged DIN EN PN40	PN40	-255°C - +120°C 18K - 393K	366
03741	DN15 - DN150	Flanged ANSI class 300	class 300	-255°C - +120°C 18K - 393K	367
03741	DN15 - DN150	Flanged ANSI class 150	class 150	-255°C - +120°C 18K - 393K	368
03741	DN200	Flanged ANSI class 150	class 150	-196°C - +120°C 77K - 393K	369
01272	DN10 - DN50	Butt weld connection, Socket weld connection	PN50	-255°C - +120°C 18K - 393K	370
03272	DN15 - DN50	Flanged DIN EN PN40	PN40	-255°C - +120°C 18K - 393K	371
03272	DN15 - DN50	Flanged ANSI class 300	class 300	-255°C - +120°C 18K - 393K	372
03272	DN15 - DN50	Flanged ANSI class 150	class 150	-255°C - +120°C 18K - 393K	373
01470	DN10 - DN100	Butt weld connection	PN50 (DN100=PN40)	-196°C - +120°C 77K - 393K	374
01743	DN10 - DN150	Butt weld connection, Socket weld connection	PN50 (DN150=PN40)	-255°C - +120°C 18K - 393K	375
01743	DN200	Butt weld connection, Socket weld connection	PN25	-196°C - +120°C 77K - 393K	376

Fire Safe and Offshore Applications

Overview of Products



Offshore Valves

Type	Nominal size	Connections	Working pressure	Temperature	Page
03743	DN15 - DN150	Flanged DIN EN PN16	PN16	-255°C - +120°C 18K - 393K	377
03743	DN15 - DN150	Flanged DIN EN PN40	PN40	-255°C - +120°C 18K - 393K	378
03743	DN15 - DN150	Flanged ANSI class 300	class 300	-255°C - +120°C 18K - 393K	379
03743	DN15 - DN150	Flanged ANSI class 150	class 150	-255°C - +120°C 18K - 393K	380
03743	DN200	Flanged ANSI class 150	class 150	-196°C - +120°C 77K - 393K	381
01473	DN10 - DN100	Butt weld connection	PN50	-255°C - +120°C 18K - 393K	382
01753	DN20 - DN80	Butt weld connection, Socket weld connection	PN50	-255°C - +120°C 18K - 393K	383
27521	DN10 - DN100	Pneumatic actuator for globe valves, spring to close	-	-40°C - +80°C 233K - 353K	384
27521	DN10 - DN100	Pneumatic actuator for control valves, spring to close	-	-40°C - +80°C 233K - 353K	385
27522	DN10 - DN100	Pneumatic actuator for globe valves, spring to open	-	-40°C - +80°C 233K - 353K	386
27522	DN10 - DN100	Pneumatic actuator for control valves, spring to open	-	-40°C - +80°C 233K - 353K	387
05714	DN10 - DN150	Butt weld connection, Socket weld connection	PN50 (DN150=PN40)	-255°C - +120°C 18K - 393K	388
05717	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	PN50	-255°C - +120°C 18K - 393K	389
05719	DN15 - DN150	Flanged DIN EN PN40	PN40	-255°C - +120°C 18K - 393K	390
05719	DN15 - DN150	Flanged ANSI class 300	class 300	-255°C - +120°C 18K - 393K	391
05719	DN15 - DN150	Flanged ANSI class 150	class 150	-255°C - +120°C 18K - 393K	392
08717	DN10 - DN100	Butt weld connection, Socket weld connection	PN50	-255°C - +120°C 18K - 393K	393
08716	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	PN50	-255°C - +120°C 18K - 393K	394
08732	DN15 - DN150	Flanged DIN EN PN40	PN40	-196°C - +120°C 77K - 393K	395
08732	DN15 - DN150	Flanged ANSI class 300	class 300	-196°C - +120°C 77K - 393K	396
08732	DN15 - DN150	Flanged ANSI class 150	class 150	-196°C - +120°C 77K - 393K	397

Fire Safe and Offshore Applications

Overview of Products



Fire Safe and Offshore Valves

Type	Nominal size	Connections	Working pressure	Temperature	Page
01851	DN10 - DN100	Butt weld connection, Socket weld connection	PN50	-255°C - +120°C 18K - 393K	398
01855	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	PN50	-255°C - +120°C 18K - 393K	399
03851	DN15 - DN150	Flanged DIN EN PN40	PN40	-255°C - +120°C 18K - 393K	400
03851	DN15 - DN150	Flanged ANSI class 300	class 300	-255°C - +120°C 18K - 393K	401
03851	DN15 - DN150	Flanged ANSI class 150	class 150	-255°C - +120°C 18K - 393K	402
01841	DN10 - DN150	Butt weld connection, Socket weld connection	PN50 (DN150=PN40)	-255°C - +120°C 18K - 393K	403
01841	DN200	Butt weld connection, Socket weld connection	PN25	-196°C - +120°C 77K - 393K	404
01841	DN10 - DN100	Butt weld connection, Socket weld connection	PN63	-255°C - +120°C 18K - 393K	405
01845	DN10 - DN50	Thread type G (BSPP) Thread type R (BSPT) Thread type NPT	PN50	-255°C - +120°C 18K - 393K	406
03841	DN15 - DN150	Flanged DIN EN PN40	PN40	-255°C - +120°C 18K - 393K	407
03841	DN15 - DN150	Flanged ANSI class 300	class 300	-255°C - +120°C 18K - 393K	408
03841	DN15 - DN150	Flanged ANSI class 150	class 150	-255°C - +120°C 18K - 393K	409
03841	DN200	Flanged ANSI class 150	class 150	-196°C - +120°C 77K - 393K	410
01282	DN10 - DN50	Butt weld connection, Socket weld connection	PN50	-255°C - +120°C 18K - 393K	411
01843	DN10 - DN150	Butt weld connection, Socket weld connection	PN50 (DN150=PN40)	-255°C - +120°C 18K - 393K	412
01843	DN200	Butt weld connection, Socket weld connection	PN25	-196°C - +120°C 77K - 393K	413
03843	DN15 - DN150	Flanged DIN EN PN16	PN16	-255°C - +120°C 18K - 393K	414
03843	DN15 - DN150	Flanged DIN EN PN40	PN40	-255°C - +120°C 18K - 393K	415
03843	DN15 - DN150	Flanged ANSI class 300	class 300	-255°C - +120°C 18K - 393K	416
03843	DN15 - DN150	Flanged ANSI class 150	class 150	-255°C - +120°C 18K - 393K	417
03843	DN200	Flanged ANSI class 150	class 150	-196°C - +120°C 77K - 393K	418
01853	DN20 - DN80	Butt weld connection, Socket weld connection	PN50	-255°C - +120°C 18K - 393K	419

Fire Safe and Offshore Applications

Overview of Products



Spare Parts for Fire Safe and Offshore Applications

Type	Specification	Nominal size	Suitable for Valve type	Page
28651	Topwork, stainless steel	DN10 - DN150	01651, 01655, 03651	420
28641	Topwork, stainless steel	DN10 - DN150	01641, 01645, 03641	421
28751	Topwork, stainless steel	DN10 - DN150	01751, 01755, 03751	422
28741	Topwork, stainless steel	DN10 - DN150	01741, 01745, 03741	423
28851	Topwork, stainless steel	DN10 - DN150	01851, 01855, 03851	424
28841	Topwork, stainless steel	DN10 - DN150	01841, 01845, 03841	425
28203	Disc complete, stainless steel	DN10 - DN100	01741, 01745, 01751, 01755	426
29203	Disc complete, stainless steel	DN10 - DN150	01641, 01645, 01651, 01655, 03641, 03651	426
29203	Disc complete, stainless steel	DN10 - DN150	01841, 01845, 01851, 01855, 03841, 03851	426
29205	Check disc complete, stainless steel	DN10 - DN150	01641, 01645, 01651, 01655, 03641, 03651	427
29205	Check disc complete, stainless steel	DN10 - DN150	01841, 01845, 01851, 01855, 03841, 03851	427
28205	Check disc complete, stainless steel	DN10 - DN150	01741, 01745, 01751, 01755, 03741, 03751	427
28206	Check disc complete, stainless steel	DN10 - DN100	05714, 05717, 05719	428
29206	Check disc complete, stainless steel	DN10 - DN100	05614	428
30641, 30643	Sealing spare part kit	DN10 - DN200	01641, 01643, 01645, 01651, 01655, 01841, 01843, 01845, 01851, 01855, 03641, 03643, 03651, 03841, 03843, 03851	429
30653	Sealing spare part kit	DN15 - DN80	01653, 01753, 01853, 03653, 03753, 03853	430
30741, 30743	Sealing spare part kit	DN10 - DN200	01741, 01743, 01745, 01751, 01755, 03741, 03743, 03751	431
30714	Sealing spare part kit	DN10 - DN100	05714, 05717, 05719	432

Storage and Transportation of Cryogenic Gases



Transport and storage: The gas mixing plant in Easington on the east coast of the UK ensures for proper gas composition with the help of nitrogen. Equipped with HEROSE valves for cryogenic service.

Type 01301 - Globe Valve

Cryogenic-Globe and Globe/Check Valves, PN50

Bronze body and topwork
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 01301.X.0001

Part No. 01301.X.5001 Globe/Check Valve

Socket end for copper pipes acc. to DIN EN 12449 or ASTM B88

Available options - on request only:

- Socket end for stainless steel pipes acc. to ISO 1127
- Valve with control disc (tapered design)



Applications:


Approved for air gases, vapours and cryogenic liquified gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2 A 194 B8	
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

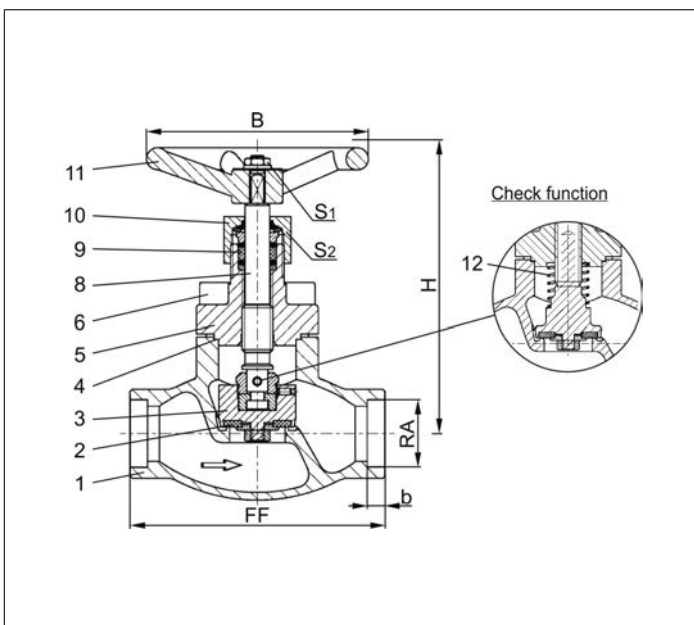

Type 01301 - Standard design	Technical data							
Nominal size	DN	10	15	20	25	32	40	50
Dimension code	.X.	X=DNRA, Example: valve DN10 for copper pipe RA ₀ 12mm, X=1012						
Face-to-face dimension	FF	60	85	85	115	115	140	160
Height	H	140	140	140	140	170	175	200
Outside pipe-Ø	RA	dependent on order						
Socket depth	b	6	6	8	8	10	13	20
Handwheel-Ø	B	100	100	100	100	125	125	125
Wrench size across flats	S ₁	7	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	30	36	36	36
Weight	ca. kg	1.0	1.3	1.7	2.0	2.8	4.2	6.7
Kvs-Value	m ³ /h	1.6	4.3	6.7	11.5	12.1	22.6	37.1
Cv-Value	gal/min	1.9	5.0	7.8	13.4	14.1	26.3	43.2

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN50 (DN10-25), PN40 (DN32), PN35 (DN40-50)

Bronze body and topwork
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 01301.X.0008

Part No. 01301.X.5008 Globe/Check Valve

Complete with brazed copper stubs acc. to DIN EN 12449

Available options - on request only:

- Valve with control disc (tapered design)



Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: - 196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900
13 Copper stubs	CW024A	B 152 UNS C12200

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

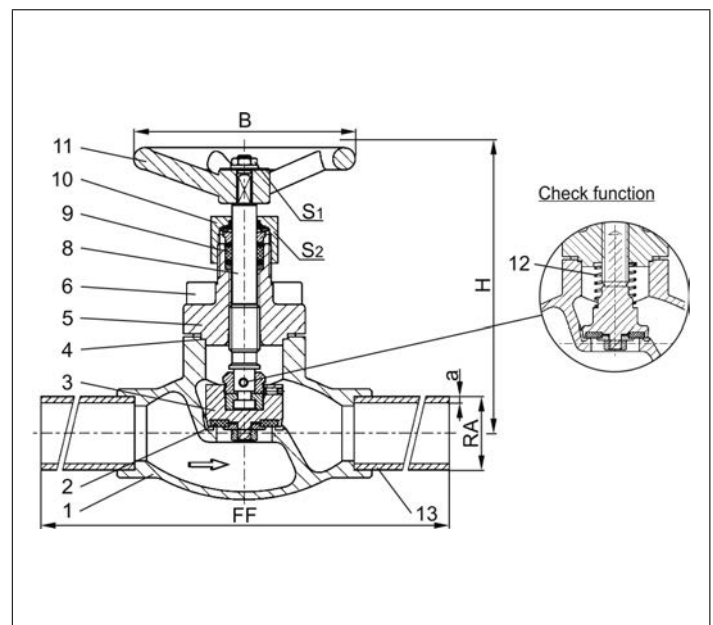

Type 01301 - Standard design	Technical data								
Nominal size	DN	10	15	15	20	25	32	40	50
Dimension code	.X.	1012	1515	1518	2022	2528	3235	4042	5054
Face-to-face dimension	FF	360	385	385	385	415	415	420	460
Height	H	140	140	140	140	140	170	175	200
Outside pipe-Ø	RA	12.0	15.0	18.0	22.0	28.0	35.0	42.0	54.0
Wall thickness pipe	a	1.0	1.5	1.5	1.5	1.5	1.5	1.5	2.0
Handwheel-Ø	B	100	100	100	100	100	125	125	125
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36
Weight	ca. kg	1.1	1.4	1.4	1.8	2.4	3.2	4.8	7.5
Kvs-Value	m ³ /h	2.2	4.3	4.3	6.7	11.5	12.1	22.6	37.1
Cv-Value	gal/min	2.6	5.0	5.0	7.8	13.4	14.1	26.3	43.2

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN50

Bronze body and topwork
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"


Part No. 01301.X.0007

Part No. 01301.X.5007 Globe/Check Valve

Complete with brazed stainless steel stubs acc. to DIN EN 10216-5 or ASTM A312

Available options - on request only:

- Valve with control disc (tapered design)
- Further pipe wall thicknesses

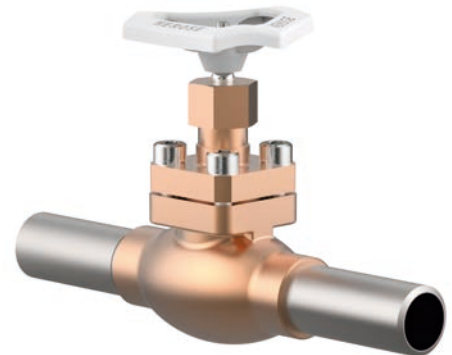

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900
13 Stainless steel stubs	1.4306	A 312 TP304L

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

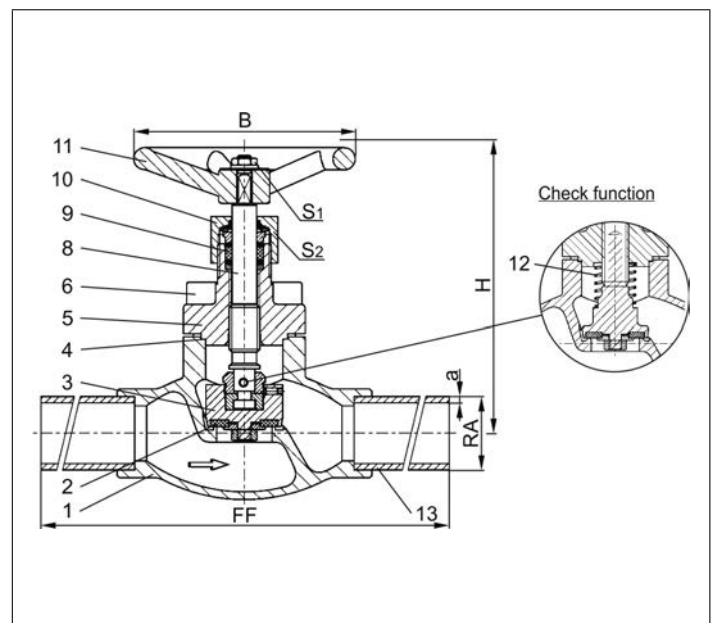

Type 01301 - Standard design		Technical data							
Nominal size	DN	10	10	15	20	25	32	40	50
Dimension code	.X.	1012	1017	1521	2027	2533	3242	4048	5060
Face-to-face dimension	FF	210	210	235	235	265	265	290	310
Height	H	140	140	140	140	140	170	175	200
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	42.4	48.3	60.3
Wall thickness pipe ISO 1127	a	1.0	2.3	2.6	2.9	3.2	3.2	3.6	3.6
Outside pipe-Ø ASTM A312	RA	-	17.15	21.34	26.67	33.4	42.16	48.26	60.33
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40							
Handwheel-Ø	B	100	100	100	100	100	125	125	125
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36
Weight	ca. kg	1.05	1.15	1.5	1.8	2.4	3.2	4.8	7.5
Kvs-Value	m ³ /h	2.2	2.2	4.3	6.7	11.5	12.1	22.6	37.1
Cv-Value	gal/min	2.6	2.6	5.0	7.8	13.4	14.1	26.3	43.2

Dimensions in mm.

Globe Valves

Type 01305 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, PN50

Bronze body and topwork
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 01305.X.0001

Part No. 01305.X.5001 Globe/Check Valve

Female thread connection (G) acc. to ISO 228/1

Part No. 01305.X.0006

Part No. 01305.X.5006 Globe/Check Valve

Female thread connection NPT acc. to ANSI B 1.20.1

Available options - on request only:

- Female thread connection (R) acc. to ISO 7-Rc
- Valve with control disc (tapered design)



Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2 A 194 B8	
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

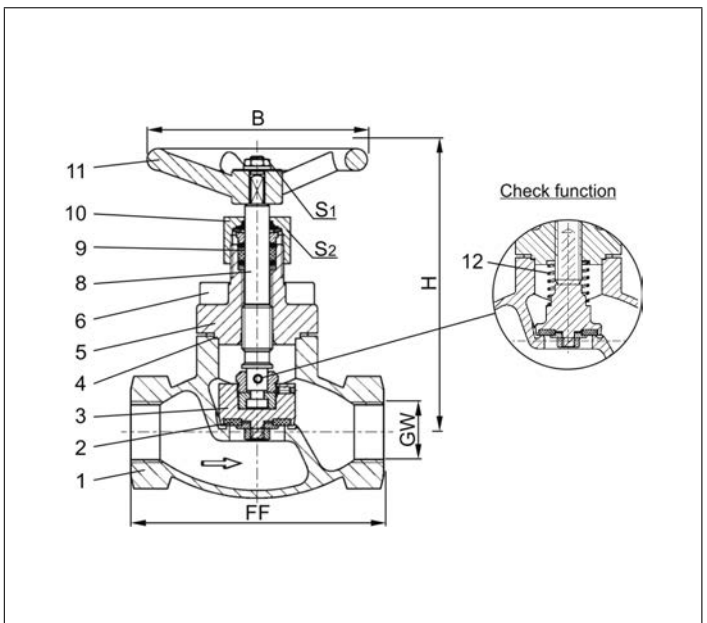

Type 01305 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	32	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	60	60	85	85	115	115	140	160
Height	H	140	140	140	140	140	170	175	200
Handwheel-Ø	B	100	100	100	100	100	125	125	125
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36
Weight	ca. kg	1.0	1.0	1.3	1.7	2.0	2.8	4.2	6.7
Kvs-Value	m ³ /h	1.6	2.2	4.3	6.7	11.5	20.6	22.6	37.1
Cv-Value	gal/min	1.9	2.6	5.0	7.8	13.4	23.9	26.3	43.2

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN50

Bronze body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 02401.X.0001

Part No. 02401.X.5001 Globe/Check Valve

Male thread for union connection

Available options - on request only:

- Valve with control disc (tapered design)



Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2 A 194 B8	
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

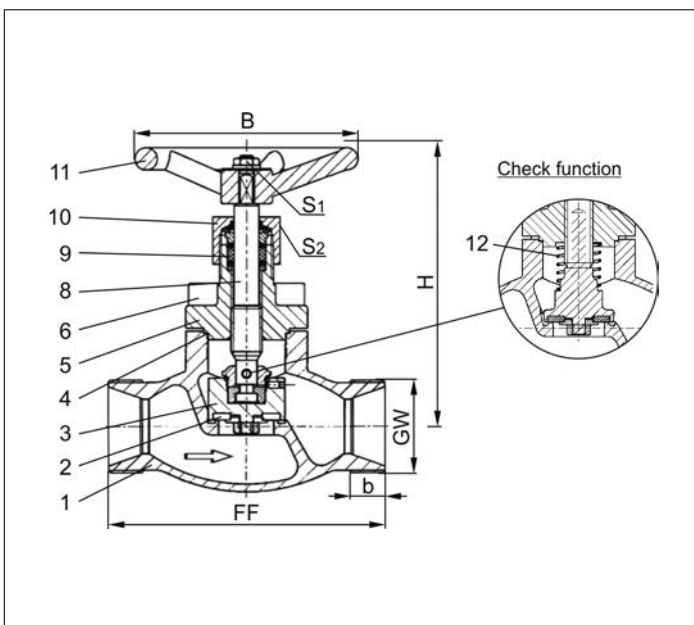

Type 02401 - Standard design	Technical data					
Nominal size	DN	10	20	32	40	50
Dimension code	.X.	0100	0200	0320	0400	0500
Face-to-face dimension	FF	60	85	115	140	160
Height	H	140	140	170	175	200
Union thread	GW	M26x1.5	M40x2.0	M55x2.0	M65x2.0	M78x2.0
Thread length	b	10	11	14	17	20
Handwheel-Ø	B	100	100	125	125	125
Wrench size across flats	S ₁	7	7	10	10	10
Wrench size across flats	S ₂	30	30	36	36	36
Weight	ca. kg	1.0	1.7	2.8	4.2	6.7
Kvs-Value	m ³ /h	2.2	6.7	12.1	22.6	37.1
Cv-Value	gal/min	2.6	7.8	14.1	26.3	43.2

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN50

Bronze body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 02401.X.0008

Part No. 02401.X.5008 Globe/Check Valve

Completed with union type braze fittings for copper pipes acc. to DIN EN 12449 or ASTM B88

Available options - on request only:

- Valve with control disc (tapered design)



Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900
13 Braze fitting	CC493K	B 505 UNS C93200
14 Union nut	CC493K	B 505 UNS C93200

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

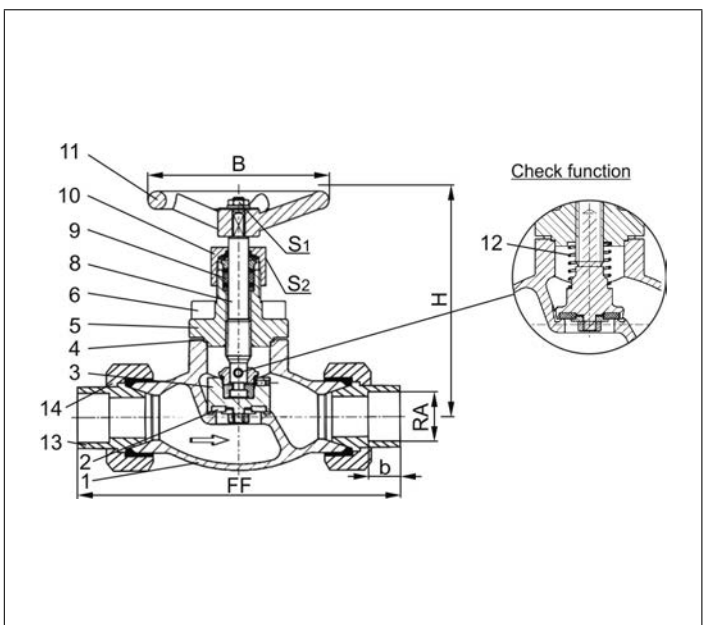

Type 02401 - Standard design	Technical data								
Nominal size	DN	10	10	20	20	32	32	40	50
Dimension code	.X.	1012	1015	1518	2022	2528	3235	4042	5054
Face-to-face dimension	FF	98	98	132	132	171	171	230	230
Height	H	140	140	140	140	170	170	175	200
Outside pipe-Ø	RA	12.0	15.0	18.0	22.0	28.0	35.0	42.0	54.0
Socket depth	b	11	11	14	14	17	17	17	17
Handwheel-Ø	B	100	100	100	100	125	125	125	125
Wrench size across flats	S ₁	7	7	7	7	10	10	10	10
Wrench size across flats	S ₂	30	30	30	30	36	36	36	36
Weight	ca. kg	1.2	1.2	2.4	2.4	4.0	4.0	6.3	9.5
Kvs-Value	m ³ /h	1.6	2.2	6.0	6.7	11.5	12.1	22.6	37.1
Cv-Value	gal/min	1.9	2.6	7.1	7.8	13.4	14.1	26.3	43.2

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN50

Bronze body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"


Part No. 02401.X.0007

Part No. 02401.X.5007 Globe/Check Valve

Completed with union type butt weld fittings for stainless steel pipes
acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Valve with control disc (tapered design)
- Further pipe wall thicknesses

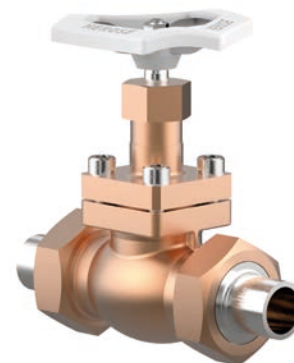

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900
13 Weld fitting	1.4301	A 276 Grade 304
14 Union nut	CC493K	B 505 UNS C93200

Standard marking acc. to Pressure Equipment
Directive 2014/68/EU (PED).

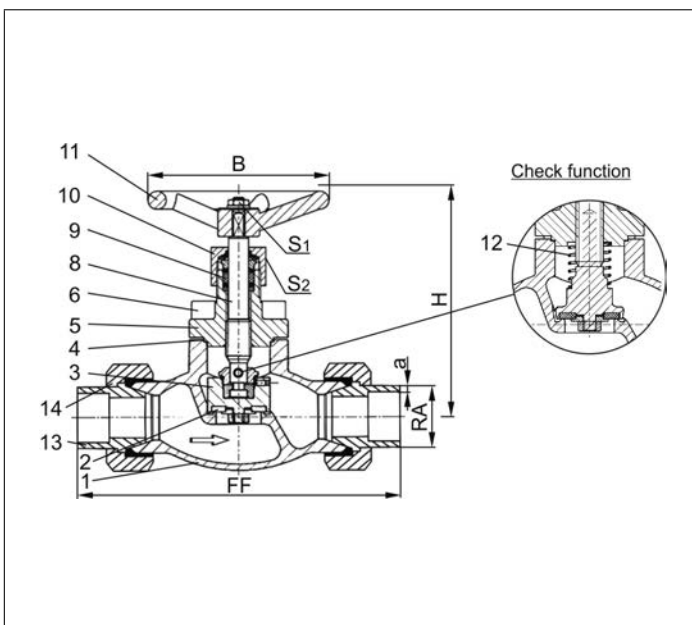

Type 02401 - Standard design		Technical data							
Nominal size	DN	10	10	20	20	32	32	40	50
Dimension code	.X.	1012	1017	1521	2027	2533	3242	4048	5060
Face-to-face dimension	FF	137	141	168	168	203	203	230	263
Height	H	140	140	140	140	170	170	175	200
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	42.4	48.3	60.3
Wall thickness pipe ISO 1127	a	1.0	2.3	2.6	2.0	3.2	2.0	3.6	3.6
Outside pipe-Ø ASTM A312	RA	-	17.15	21.34	26.67	33.40	42.16	48.26	60.33
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40							
Handwheel-Ø	B	100	100	100	100	125	125	125	125
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	30	36	36	36	36
Weight	ca. kg	1.2	1.2	2.4	2.4	4.0	4.0	6.3	9.5
Kvs-Value	m ³ /h	1.6	2.2	6.7	6.7	12.1	12.1	22.6	37.1
Cv-Value	gal/min	1.9	2.6	7.8	7.8	14.1	14.1	26.3	43.2

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN50 (DN150=PN40)

Stainless steel body and bronze topwork
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 01331.X.000*

Part No. 01331.X.500* Globe/Check Valve

*Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312


Part No. 01331.X.0004

Part No. 01331.X.5004 Globe/Check Valve

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Valve with control disc (tapered design)
- Further pipe wall thicknesses

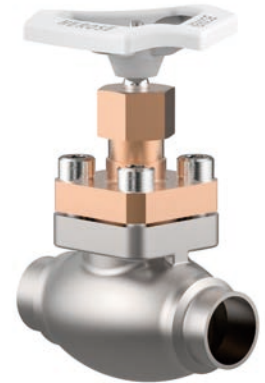

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

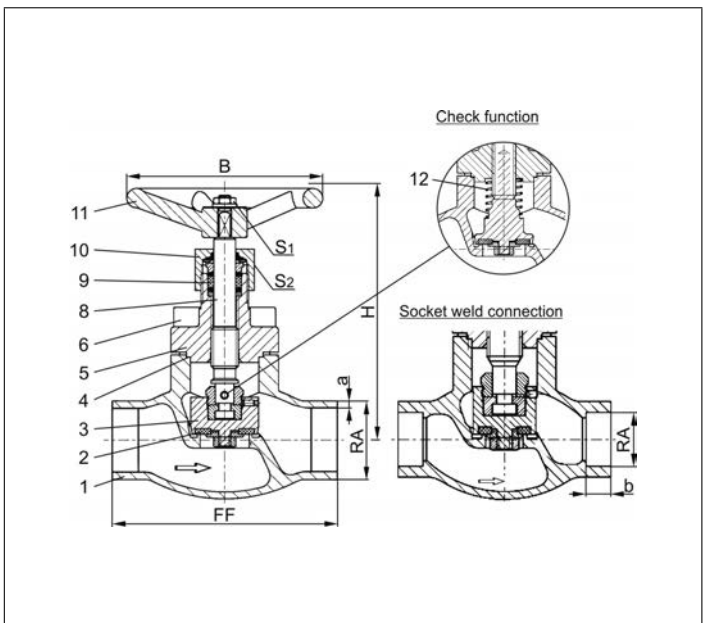

Type 01331 - Standard design	Technical data														
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100	150	
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114	0168	
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280	400	
Height	H	140	140	140	140	140	170	175	175	200	260	310	350	420	
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3	168.3	
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0	7.1	
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.32	73.02	88.90	114.30	168.27	
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40													
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20	20	
Handwheel-Ø	B	100	100	100	100	100	125	125	125	125	200	250	315	360	
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10	10	10	10	12	15	
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36	36	36	36	41	41	
Weight	ca. kg	1.0	1.25	1.3	1.7	2.0	2.8	4.2	4.2	6.7	10.7	16.0	22.0	54.1	
Kvs-Value	m³/h	1.6	3.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1	71.1	104.0	170.0	350.0	
Cv-Value	gal/min	1.9	4.4	5.0	7.8	13.4	16.2	23.9	26.3	43.2	82.7	120.9	195.2	401.8	

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Globe Valves

Type 01335 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, PN50

Stainless steel body and bronze topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01335.X.0001

Part No. 01335.X.5001 Globe/Check Valve

Female thread connection (G) acc. to ISO 228/1

Part No. 01335.X.0006

Part No. 01335.X.5006 Globe/Check Valve

Female thread connection NPT acc. to ANSI B 1.20.1

Available options - on request only:

- Female thread connection (R) acc. to ISO 7-Rc
- Valve with control disc (tapered design)



Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

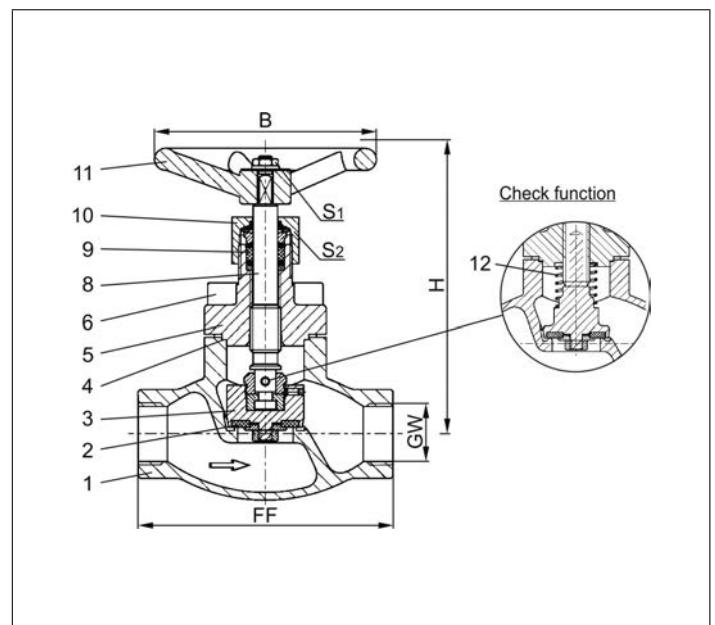

Type 01335 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	40	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	70	70	85	100	115	130	130	155
Height	H	140	140	140	140	140	175	175	200
Handwheel-Ø	B	100	100	100	100	100	125	125	125
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36
Weight	ca. kg	1.0	1.0	1.3	1.7	2.0	4.2	4.2	6.7
Kvs-Value	m ³ /h	1.6	2.2	4.3	6.7	11.5	20.6	22.6	37.1
Cv-Value	gal/min	1.9	2.6	5.0	7.8	13.4	23.9	26.3	43.2

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN40

Stainless steel body and bronze topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03331.X.0002

Part No. 03331.X.5002 Globe/Check Valve

Flanged connection acc. to DIN EN 1092-1 PN40

Available options - on request only:

- Valve with control disc (tapered design)



Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

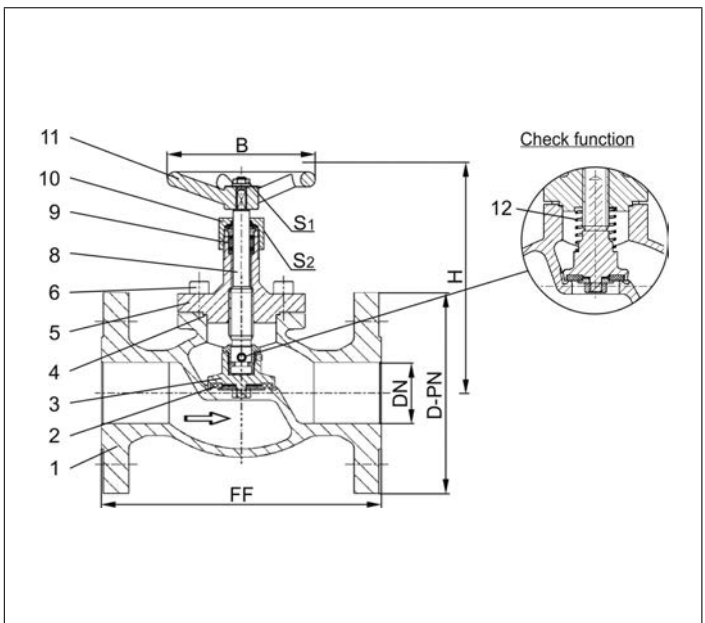

Type 03331 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	130	130	140	175	200	260	310	350	380
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	4.5	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Cryogenic-Globe and Globe/Check Valves, class 300

Stainless steel body and bronze topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03331.X.0003

Part No. 03331.X.5003 Globe/Check Valve

Flanged connection acc. to ANSI B16.5 class 300

Available options - on request only:

- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900

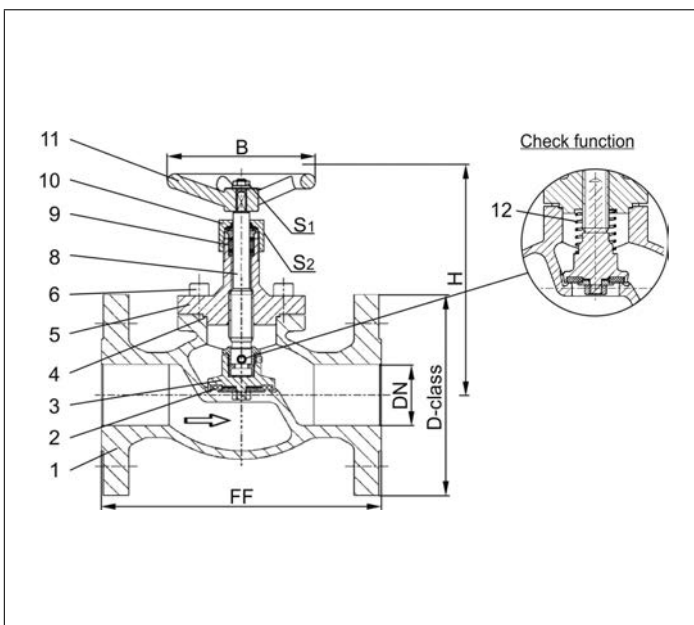

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03331 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	130	130	140	175	200	260	310	350	380
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	4.5	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Cryogenic-Globe and Globe/Check Valves, class 150

Stainless steel body and bronze topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03331.X.0001

Part No. 03331.X.5001 Globe/Check Valve

Flanged connection acc. to ANSI B16.5 class 150

Available options - on request only:

- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900

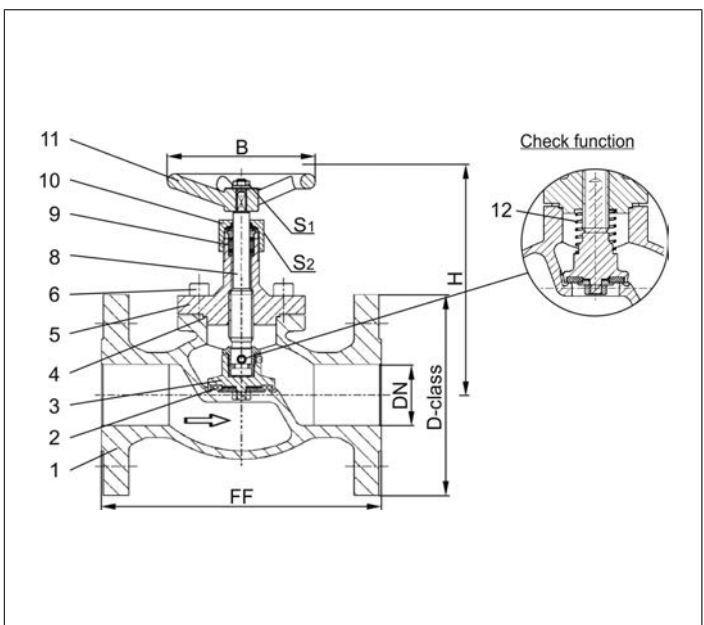

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03331 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	130	130	140	175	200	260	310	350	380
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	4.5	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN50 (DN150=PN40)

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01351.X.000*

Part No. 01351.X.500* Globe/Check Valve

*Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01351.X.0004

Part No. 01351.X.5004 Globe/Check Valve

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Valve with control disc (tapered design)
- Further pipe wall thicknesses



Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	Aluminium alloy	
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

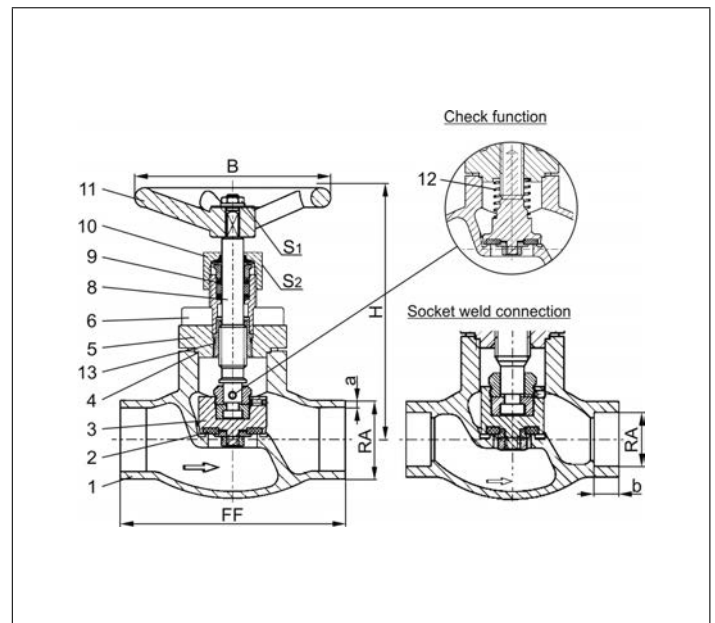

Type 01351 - Standard design	Technical data													
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100	150
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114	0168
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280	400
Height	H	140	140	140	140	140	170	175	175	200	260	310	350	420
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3	168.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0	7.1
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.32	73.02	88.90	114.30	168.27
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40												
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20	20
Handwheel-Ø	B	100	100	100	100	100	125	125	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36	36	36	36	41	41
Weight	ca. kg	1.0	1.25	1.3	1.7	2.0	2.8	4.2	4.2	6.7	10.7	16.0	23.0	54.1
Kvs-Value	m³/h	1.6	3.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	1.9	4.4	5.0	7.8	13.4	16.2	23.9	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Cryogenic-Globe and Globe/Check Valves, PN50

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01355.X.0001

Part No. 01355.X.5001 Globe/Check Valve

Female thread connection (G) acc. to ISO 228/1

Part No. 01355.X.0006

Part No. 01355.X.5006 Globe/Check Valve

Female thread connection NPT acc. to ANSI B 1.20.1

Available options - on request only:

- Female thread connection (R) acc. to ISO 7-Rc
- Valve with control disc (tapered design)



Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	Aluminium alloy	
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

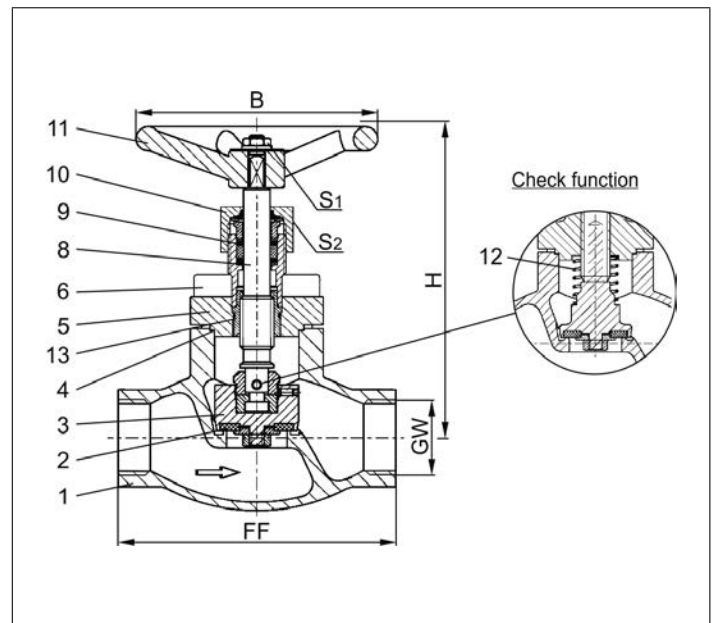

Type 01355 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	40	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	70	70	85	100	115	130	130	155
Height	H	140	140	140	140	140	175	175	200
Handwheel-Ø	B	100	100	100	100	100	125	125	125
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36
Weight	ca. kg	1.0	1.0	1.3	1.7	2.0	4.2	4.2	6.7
Kvs-Value	m ³ /h	1.6	2.2	4.3	6.7	11.5	20.6	22.6	37.1
Cv-Value	gal/min	1.9	2.6	5.0	7.8	13.4	23.9	26.3	43.2

Dimensions in mm.

Globe Valves

Type 03351 - Globe Valve, DIN EN Flanges



Cryogenic-Globe and Globe/Check Valves, PN40

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03351.X.0002

Part No. 03351.X.5002 Globe/Check Valve

Flanged connection acc. to DIN EN 1092-1 PN40

Available options - on request only:

- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	Aluminium alloy	
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

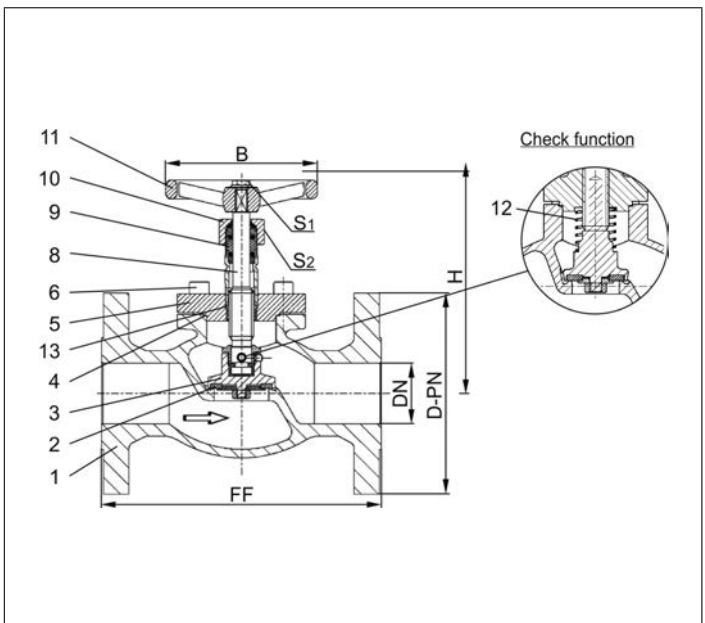

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03351 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	130	130	140	170	200	260	310	350	380
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	4.5	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Cryogenic-Globe and Globe/Check Valves, class 300

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03351.X.0003

Part No. 03351.X.5003 Globe/Check Valve

Flanged connection acc. to ANSI B16.5 class 300

Available options - on request only:

- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	Aluminium alloy	
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

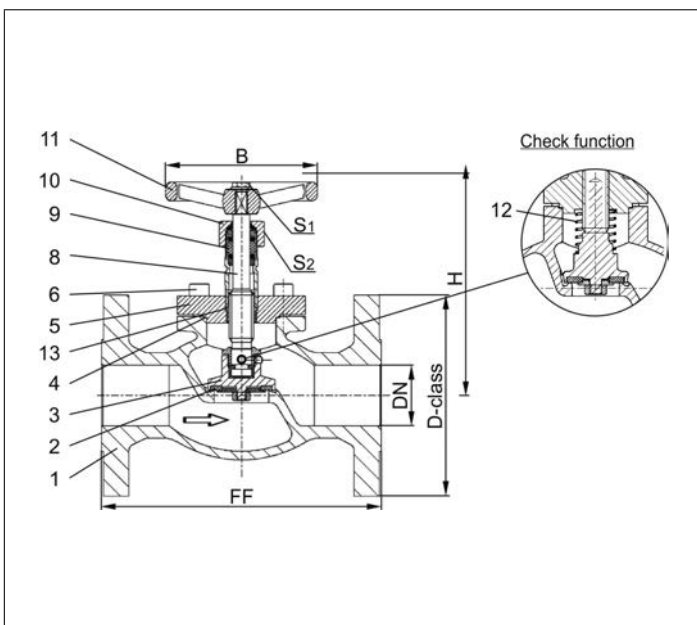

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03351 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	130	130	140	170	200	260	310	350	380
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	4.5	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Cryogenic-Globe and Globe/Check Valves, class 150

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03351.X.0001

Part No. 03351.X.5001 Globe/Check Valve

Flanged connection acc. to ANSI B16.5 class 150

Available options - on request only:

- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	Aluminium alloy	
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

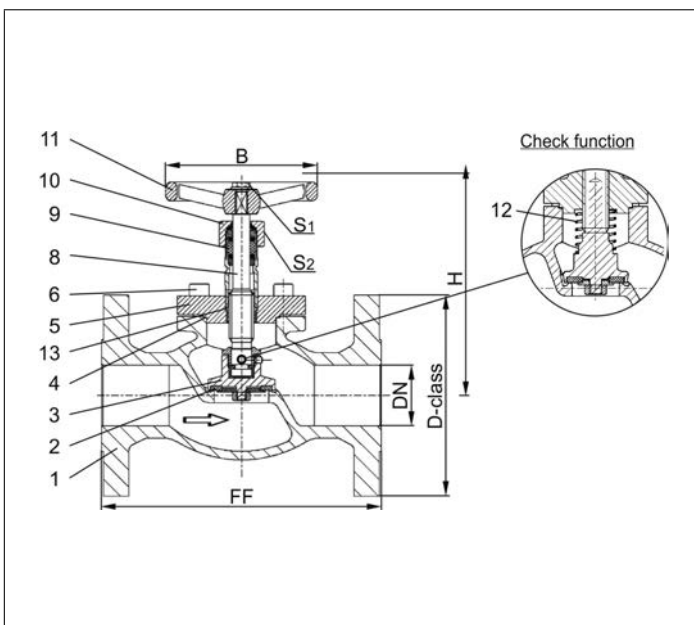

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03351 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	130	130	140	170	200	260	310	350	380
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	4.5	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm.

Globe Valves

Type 01311 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, PN50

Bronze body and topwork
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 01311.X.0010 (H=270mm)

Part No. 01311.X.0020 (H=370mm)

Part No. 01311.X.5010 (H=270mm) Globe/Check Valve

Part No. 01311.X.5020 (H=370mm) Globe/Check Valve

Socket end for copper pipes acc. to DIN EN 12449 or ASTM B88

Available options - on request only:

- Socket end for stainless steel stubs acc. to ISO 1127
- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

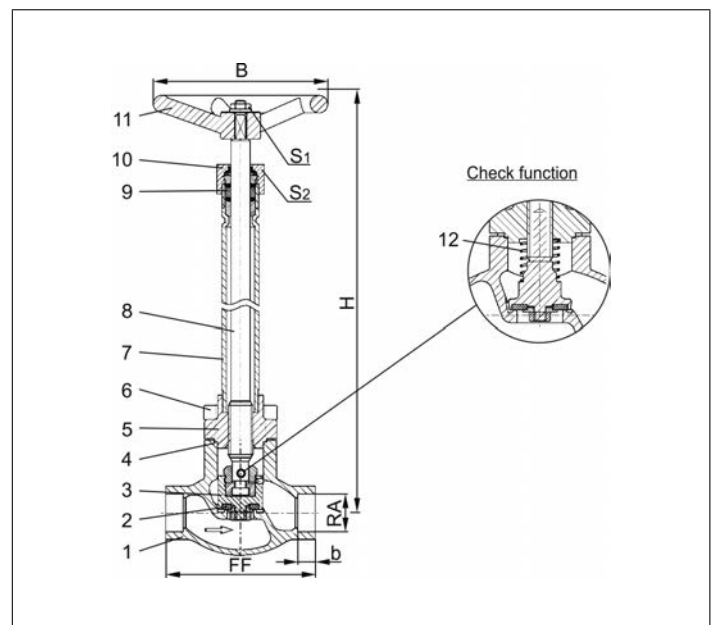

Type 01311 - Standard design	Technical data							
Nominal size	DN	10	15	20	25	32	40	50
Dimension code	.X.	X=DNRA. Example: valve DN15 for copper stub RA _ø 18mm. X=1518						
Face-to-face dimension	FF	60	85	85	115	115	140	160
Height	H	270mm or 370mm						
Outside pipe-Ø	RA	dependent on order						
Socket depth	b	6	6	8	8	10	13	20
Handwheel-Ø	B	100	100	100	100	125	125	125
Wrench size across flats	S ₁	7	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	30	36	36	36
Weight	ca. kg	1.4	1.7	2.1	2.4	3.3	4.7	7.2
Kvs-Value	m ³ /h	1.6	4.3	6.7	11.5	12.1	22.6	37.1
Cv-Value	gal/min	1.9	5.0	7.8	13.4	14.1	26.3	43.2

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN50 (DN10-25), PN40 (DN32), PN35 (DN40-50)

Bronze body and topwork
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01311.X.0018 (H=270mm)

Part No. 01311.X.0028 (H=370mm)

Part No. 01311.X.5018 (H=270mm) Globe/Check Valve

Part No. 01311.X.5028 (H=370mm) Globe/Check Valve

Complete with copper stubs acc. to DIN EN 12449

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900
13 Copper stubs	CW024A	B 152 UNS C12200

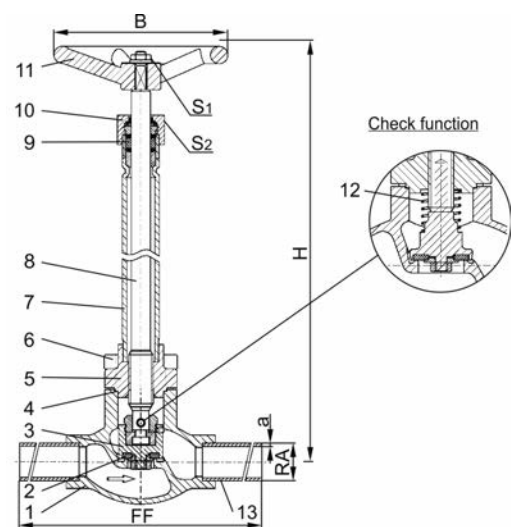

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 01311 - Standard design	Technical data								
Nominal size	DN	10	15	15	20	25	32	40	50
Dimension code	.X.	1012	1515	1518	2022	2528	3235	4042	5054
Face-to-face dimension	FF	360	385	385	385	415	415	420	460
Height	H	270mm or 370mm							
Outside pipe-Ø	RA	12.0	15.0	18.0	22.0	28.0	35.0	42.0	54.0
Wall thickness pipe	a	1.0	1.5	1.5	1.5	1.5	1.5	1.5	2.0
Handwheel-Ø	B	100	100	100	100	100	125	125	125
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36
Weight	ca. kg	1.5	1.9	1.9	2.4	2.8	3.7	5.2	7.8
Kvs-Value	m ³ /h	2.2	4.3	4.3	6.7	11.5	12.1	22.6	37.1
Cv-Value	gal/min	2.6	5.0	5.0	7.8	13.4	14.1	26.3	43.2

Dimensions in mm.



Cryogenic-Globe and Globe/Check Valves, PN50

Bronze body and topwork

"live loaded" gland packing

"cleaned and degreased for oxygen service"

Part No. 01311.X.0017 (H=270mm)

Part No. 01311.X.0027 (H=370mm)


Part No. 01311.X.5017 (H=270mm) Globe/Check Valve

Part No. 01311.X.5027 (H=370mm) Globe/Check Valve

Complete with stainless steel stubs acc. to DIN EN 10216-5 or ASTM A312

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)
- Further pipe wall thicknesses

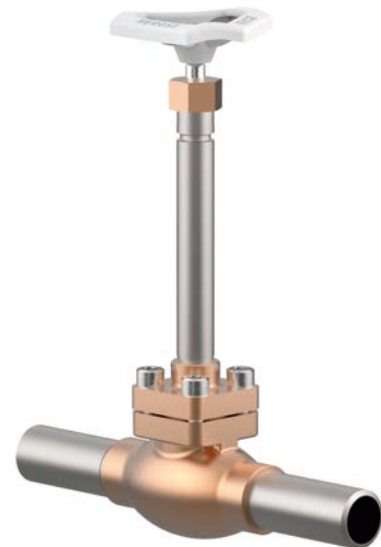


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900
13 Stainless steel stubs	1.4306	A 312 TP304L

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

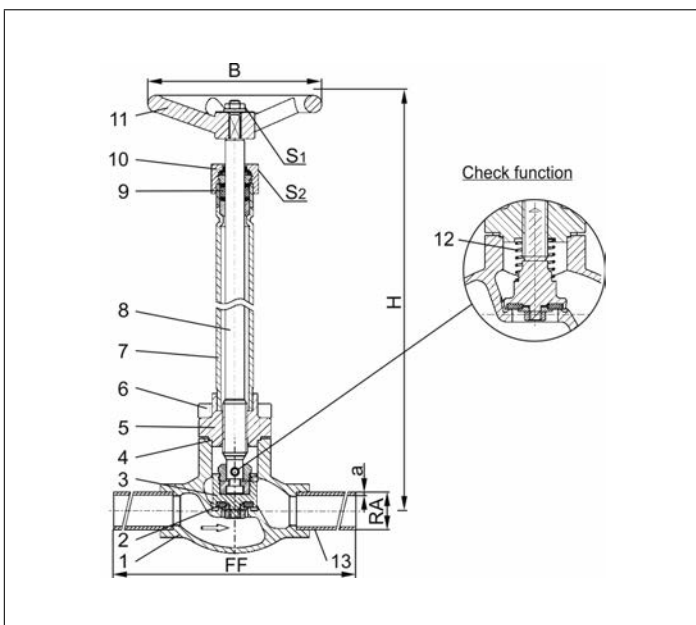

Type 01311 - Standard design		Technical data							
Nominal size	DN	10	10	15	20	25	32	40	50
Dimension code	.X.	1012	1017	1521	2027	2533	3242	4048	5060
Face-to-face dimension	FF	210	210	235	235	265	265	290	310
Height	H	270mm or 370mm							
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	42.4	48.3	60.3
Wall thickness pipe ISO 1127	a	1.0	2.3	2.6	2.9	3.2	3.2	3.6	3.6
Outside pipe-Ø ASTM A312	RA	-	17.15	21.34	26.67	33.4	42.16	48.26	60.33
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40							
Handwheel-Ø	B	100	100	100	100	100	125	125	125
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36
Weight	ca. kg	1.45	1.55	2.0	2.4	2.8	3.7	5.2	7.8
Kvs-Value	m ³ /h	2.2	2.2	4.3	6.7	11.5	12.1	22.6	37.1
Cv-Value	gal/min	2.6	2.6	5.0	7.8	13.4	14.1	26.3	43.2

Dimensions in mm.

Globe Valves

Type 01315 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, PN50

Bronze body and topwork

"live loaded" gland packing

"cleaned and degreased for oxygen service"

Part No. 01315.X.0011 (H=270mm)

Part No. 01315.X.0021 (H=370mm)

Part No. 01315.X.5011 (H=270mm) Globe/Check Valve

Part No. 01315.X.5021 (H=370mm) Globe/Check Valve

Female thread connection (G) acc. to ISO 228/1

Part No. 01315.X.0016 (H=270mm)

Part No. 01315.X.0026 (H=370mm)

Part No. 01315.X.5016 (H=270mm) Globe/Check Valve

Part No. 01315.X.5026 (H=370mm) Globe/Check Valve

Female thread connection NPT acc. to ANSI B 1.20.1

Available options - on request only:

· Female thread connection (R) acc. to ISO 7-Rc

· Extension H up to 900mm

· Valve with control disc (tapered design)

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

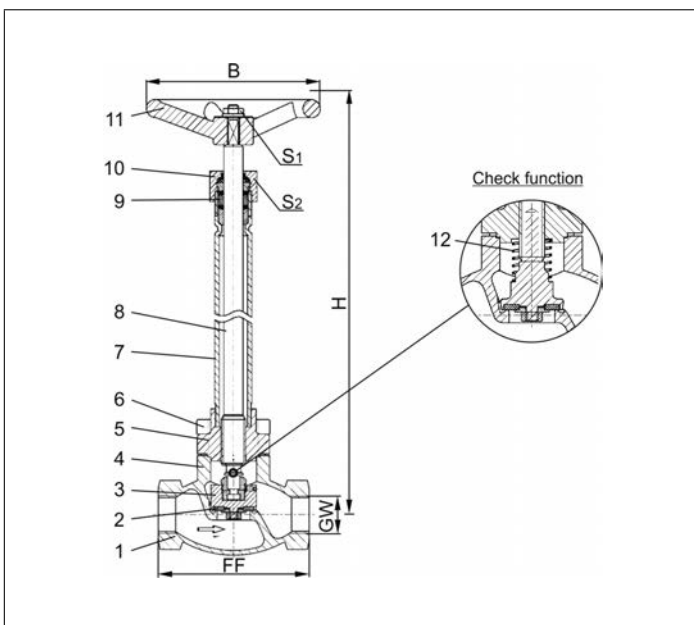

Type 01315 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	32	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	60	60	85	85	115	115	140	160
Height	H	270mm or 370mm							
Handwheel-Ø	B	100	100	100	100	100	125	125	125
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36
Weight	ca. kg	1.4	1.4	1.7	2.1	2.4	3.3	4.7	7.2
Kvs-Value	m ³ /h	1.6	2.2	4.3	6.7	11.5	20.6	22.6	37.1
Cv-Value	gal/min	1.9	2.6	5.0	7.8	13.4	23.9	26.3	43.2

Dimensions in mm.

Globe Valves

Type 02411 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, PN50

Bronze body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 02411.X.0011 (H=270mm)

Part No. 02411.X.0021 (H=370mm)

Part No. 02411.X.5011 (H=270mm) Globe/Check Valve

Part No. 02411.X.5021 (H=370mm) Globe/Check Valve

Male thread for union connection

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

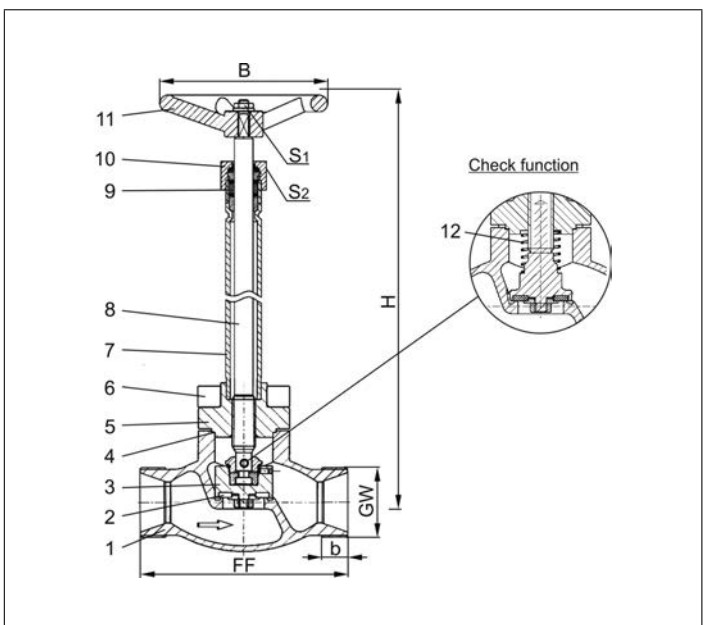

Type 02411 - Standard design	Technical data					
Nominal size	DN	10	20	32	40	50
Dimension code	.X.	0100	0200	0320	0400	0500
Face-to-face dimension	FF	60	85	115	140	160
Height	H	270 mm or 370 mm				
Union thread	GW	M26x1.5	M40x2.0	M55x2.0	M65x2.0	M78x2.0
Thread length	b	10	11	14	17	20
Handwheel-Ø	B	100	100	125	125	125
Wrench size across flats	S ₁	7	7	10	10	10
Wrench size across flats	S ₂	30	30	36	36	36
Weight	ca. kg	1.4	2.1	3.3	4.7	7.2
Kvs-Value	m ³ /h	2.2	6.7	12.1	22.6	37.1
Cv-Value	gal/min	2.6	7.8	14.1	26.3	43.2

Dimensions in mm.

Type 02411 - Globe Valve

Cryogenic-Globe and Globe/Check Valves, PN50

Bronze body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 02411.X.0018 (H=270mm)

Part No. 02411.X.0028 (H=370mm)

Part No. 02411.X.5018 (H=270mm) Globe/Check Valve

Part No. 02411.X.5028 (H=370mm) Globe/Check Valve

Completed with union type braze fittings for copper pipes acc. to DIN EN 12449 or ASTM B88

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900
13 Braze fitting	CC493K	B 505 UNS C93200
14 Union nut	CC493K	B 505 UNS C93200

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

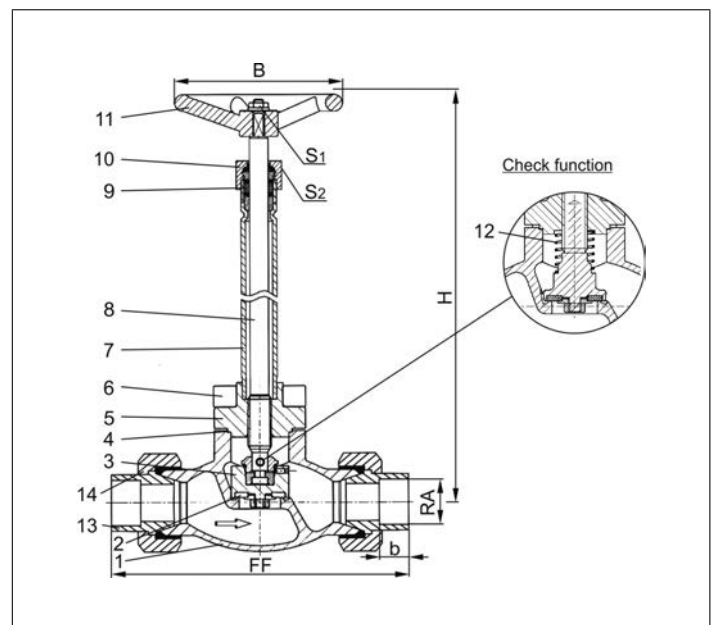

Type 02411 - Standard design	Technical data								
Nominal size	DN	10	10	20	20	32	32	40	50
Dimension code	.X.	1012	1015	1518	2022	2528	3235	4042	5054
Face-to-face dimension	FF	98	98	132	132	171	171	230	230
Height	H	270 mm or 370 mm							
Outside pipe-Ø	RA	12.0	15.0	18.0	22.0	28.0	35.0	42.0	54.0
Socket depth	b	11	11	14	14	17	17	17	17
Handwheel-Ø	B	100	100	100	100	125	125	125	125
Wrench size across flats	S ₁	7	7	7	7	10	10	10	10
Wrench size across flats	S ₂	30	30	30	30	36	36	36	36
Weight	ca. kg	1.5	1.5	2.8	2.8	4.5	4.5	6.8	10.0
Kvs-Value	m ³ /h	1.6	2.2	6.0	6.7	11.5	12.1	22.6	37.1
Cv-Value	gal/min	1.9	2.6	7.1	7.8	13.4	14.1	26.3	43.2

Dimensions in mm.

Type 02411 - Globe Valve

Cryogenic-Globe and Globe/Check Valves, PN50

Bronze body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 02411.X.0017 (H=270mm)

Part No. 02411.X.0027 (H=370mm)


Part No. 02411.X.5017 (H=270mm) Globe/Check Valve

Part No. 02411.X.5027 (H=370mm) Globe/Check Valve

Completed with union type butt weld fittings for stainless steel pipes
acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)
- Further pipe wall thicknesses

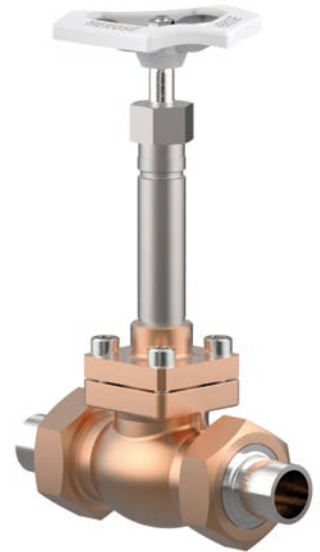


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900
13 Weld fitting	1.4301	A 276 Grade 304
14 Union nut	CC493K	B 505 UNS C93200

Standard marking acc. to Pressure Equipment
Directive 2014/68/EU (PED).

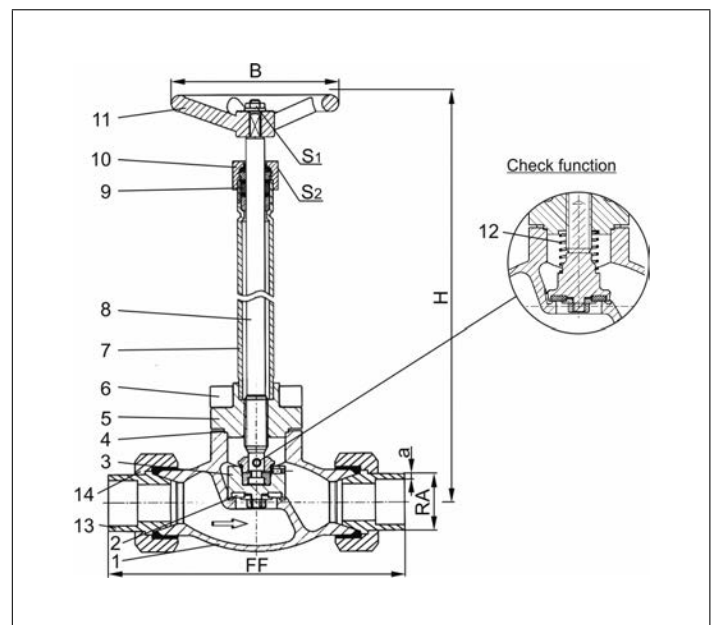

Type 02411 - Standard design		Technical data							
Nominal size	DN	10	10	20	20	32	32	40	50
Dimension code	.X.	1012	1017	1521	2027	2533	3242	4048	5060
Face-to-face dimension	FF	137	141	168	168	203	203	230	263
Height	H	270 mm or 370 mm							
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	42.4	48.3	60.3
Wall thickness pipe ISO 1127	a	1.0	2.3	2.6	2.0	3.2	2.0	3.6	3.6
Outside pipe-Ø ASTM A312	RA	-	17.15	21.34	26.67	33.40	42.16	48.26	60.33
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40							
Handwheel-Ø	B	100	100	100	100	125	125	125	125
Wrench size across flats	S ₁	7	7	7	7	10	10	10	10
Wrench size across flats	S ₂	30	30	30	30	36	36	36	36
Weight	ca. kg	1.5	1.5	2.8	2.8	4.5	4.5	6.8	10.0
Kvs-Value	m ³ /h	1.6	2.2	6.7	6.7	12.1	12.1	22.6	37.1
Cv-Value	gal/min	1.9	2.6	7.8	7.8	14.1	14.1	26.3	43.2

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN50 (DN150=PN40)

Stainless steel body and bronze topwork
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01321.X.001* (H = 270mm)

Part No. 01321.X.002* (H = 370mm)

Part No. 01321.X.501* (H = 270mm) Globe/Check Valve

Part No. 01321.X.502* (H = 370mm) Globe/Check Valve

*Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01321.X.0014 (H = 270mm)

Part No. 01321.X.0024 (H = 370mm)

Part No. 01321.X.5014 (H = 270mm) Globe/Check Valve

Part No. 01321.X.5024 (H = 370mm) Globe/Check Valve

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Extension H up to 900mm
- Valve with control disc (tapered design)
- Further pipe wall thicknesses

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

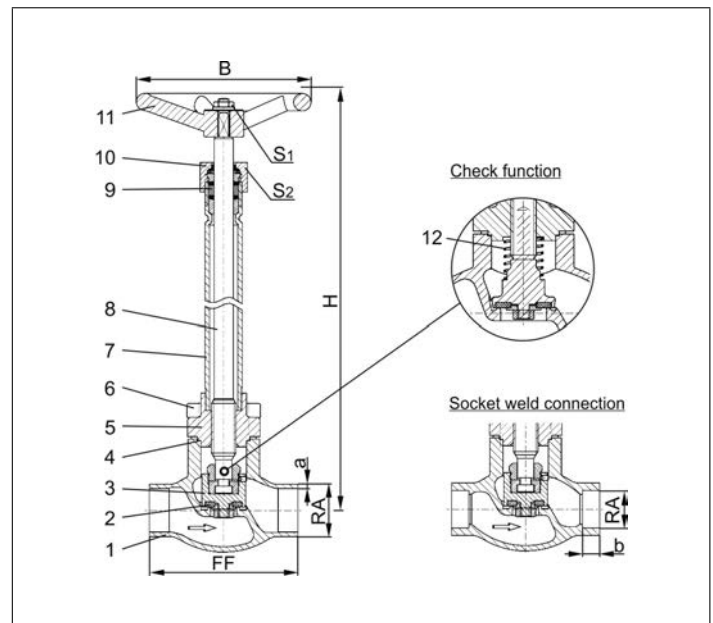

Type 01321 - Standard design	Technical data													
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100	150
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114	0168
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280	400
Height	H	270mm or 370mm										320	320	370
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3	168.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0	7.1
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.32	73.02	88.90	114.30	168.27
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40												
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20	20
Handwheel-Ø	B	100	100	100	100	100	125	125	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36	36	36	36	41	41
Weight	ca. kg	1.4	1.65	1.7	2.1	2.4	3.3	4.7	4.7	5.7	12.7	17.0	24.5	54.0
Kvs-Value	m ³ /h	1.6	3.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	1.9	4.4	5.0	7.8	13.4	16.2	23.9	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Globe Valves

Type 01325 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, PN50

Stainless steel body and bronze topwork
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 01325.X.0011 (H = 270mm)

Part No. 01325.X.0021 (H = 370mm)

Part No. 01325.X.5011 (H = 270mm) Globe/Check Valve

Part No. 01325.X.5021 (H = 370mm) Globe/Check Valve

Female thread connection (G) acc. to ISO 228/1

Part No. 01325.X.0016 (H = 270mm)

Part No. 01325.X.0026 (H = 370mm)

Part No. 01325.X.5016 (H = 270mm) Globe/Check Valve

Part No. 01325.X.5026 (H = 370mm) Globe/Check Valve

Female thread connection NPT acc. to ANSI B 1.20.1

Available options - on request only:

- Female thread connection (R) acc. to ISO 7-Rc
- Extension H up to 900mm
- Valve with control disc (tapered design)

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

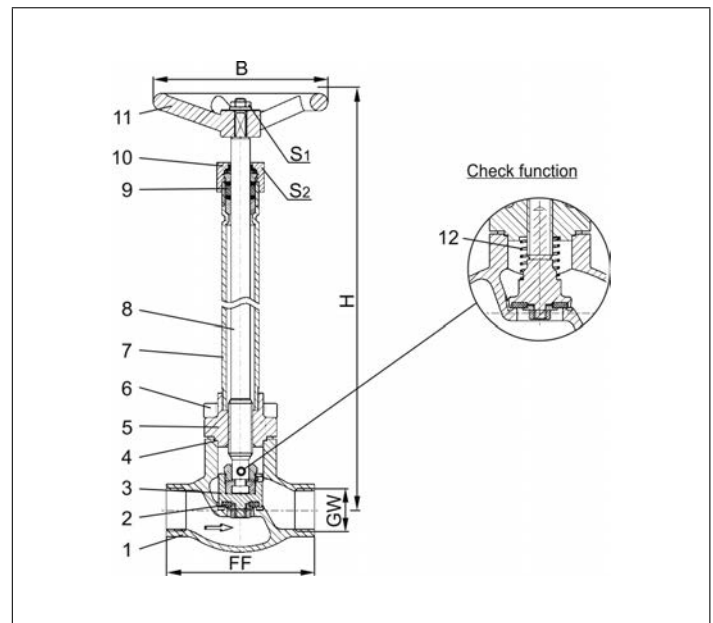

Type 01325 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	40	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	70	70	85	100	115	130	130	155
Height	H	270mm or 370mm							
Handwheel-Ø	B	100	100	100	100	100	125	125	125
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36
Weight	ca. kg	1.4	1.4	1.7	2.1	2.4	4.7	4.7	7.2
Kvs-Value	m ³ /h	1.6	2.2	4.3	6.7	11.5	20.6	22.6	37.1
Cv-Value	gal/min	1.9	2.6	5.0	7.8	13.4	23.9	26.3	43.2

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN16

Stainless steel body and bronze topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03321.X.0014 (H = 270mm)

Part No. 03321.X.0024 (H = 370mm)

Part No. 03321.X.5014 (H = 270mm) Globe/Check Valve

Part No. 03321.X.5024 (H = 370mm) Globe/Check Valve

Flanged connection acc. to DIN EN 1092-1 PN16

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	CW614N B 283 UNS C38500	
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K B 505 UNS C93200	
6 Bolts	1.4301/A2 A 194 B8	
7 Elongation tube	1.4541 A 213 TP 321	
8 Stem	1.4301 A 276 Grade 304	
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N B 283 UNS C38500	
11 Handwheel	Aluminium alloy	
12 Spring	CW452K B 159 UNS C51900	

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

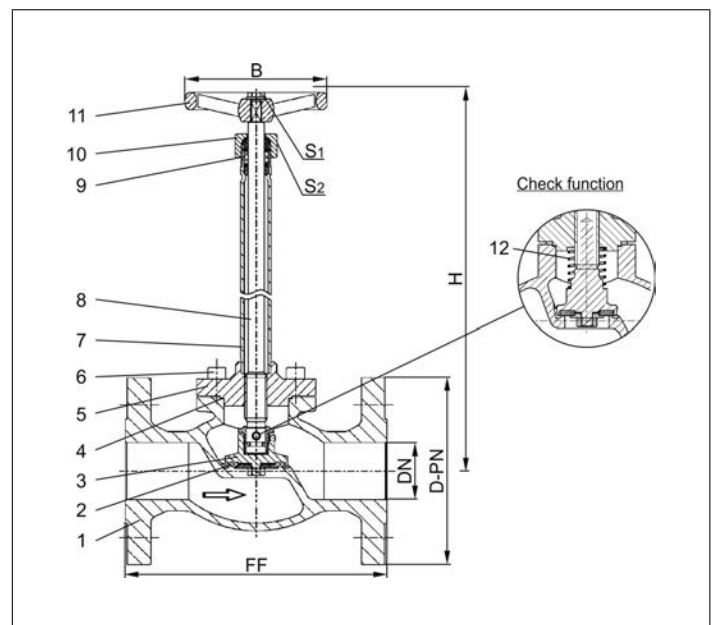

Type 03321 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN16	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	220	285
Face-to-face dimension	FF	140	150	160	200	230	295	310	350	510
Height	H	270 mm or 370 mm							370	420
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	5.0	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN40

Stainless steel body and bronze topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03321.X.0012 (H = 270mm)

Part No. 03321.X.0022 (H = 370mm)

Part No. 03321.X.5012 (H = 270mm) Globe/Check Valve

Part No. 03321.X.5022 (H = 370mm) Globe/Check Valve

Flanged connection acc. to DIN EN 1092-1 PN40

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

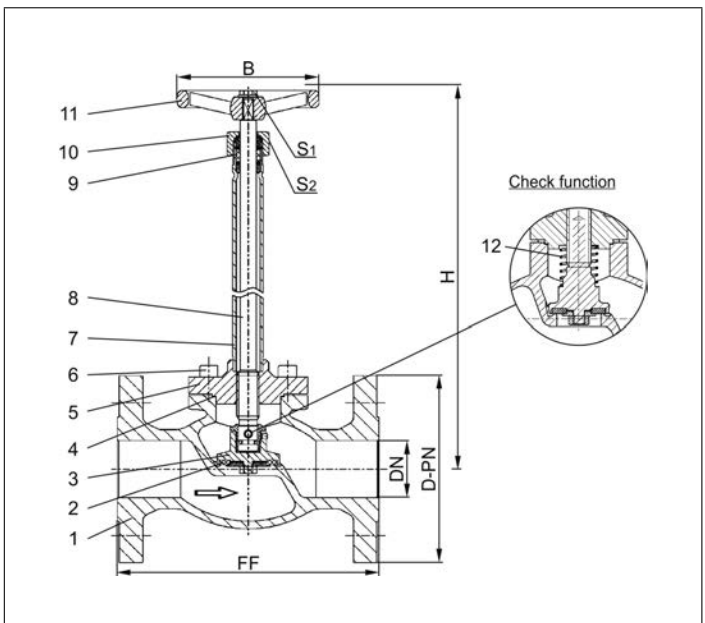

Type 03321 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	270 mm or 370 mm							370	420
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	5.0	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Cryogenic-Globe and Globe/Check Valves, class 300

Stainless steel body and bronze topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03321.X.0013 (H = 270mm)

Part No. 03321.X.0023 (H = 370mm)

Part No. 03321.X.5013 (H = 270mm) Globe/Check Valve

Part No. 03321.X.5023 (H = 370mm) Globe/Check Valve

Flanged connection acc. to ANSI B16.5 class 300

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

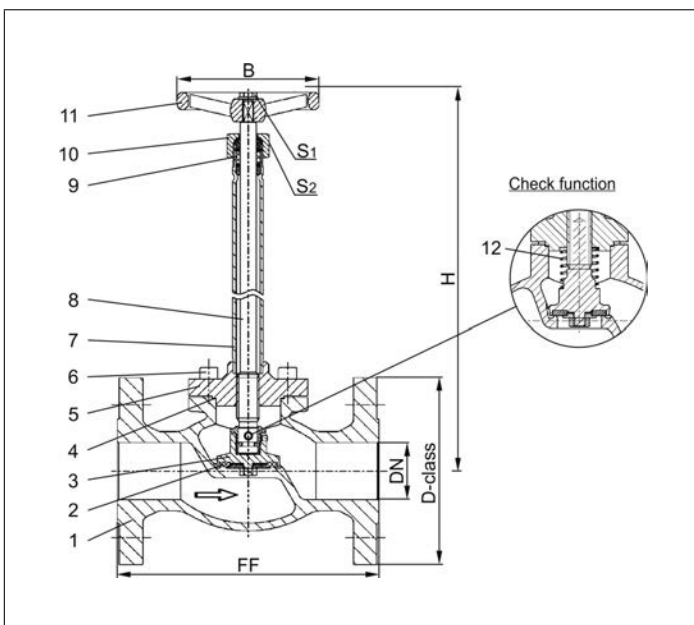

Type 03321 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	270 mm or 370 mm							370	420
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	5.0	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Cryogenic-Globe and Globe/Check Valves, class 150

Stainless steel body and bronze topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03321.X.0011 (H = 270mm)

Part No. 03321.X.0021 (H = 370mm)

Part No. 03321.X.5011 (H = 270mm) Globe/Check Valve

Part No. 03321.X.5021 (H = 370mm) Globe/Check Valve

Flanged connection acc. to ANSI B16.5 class 150

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

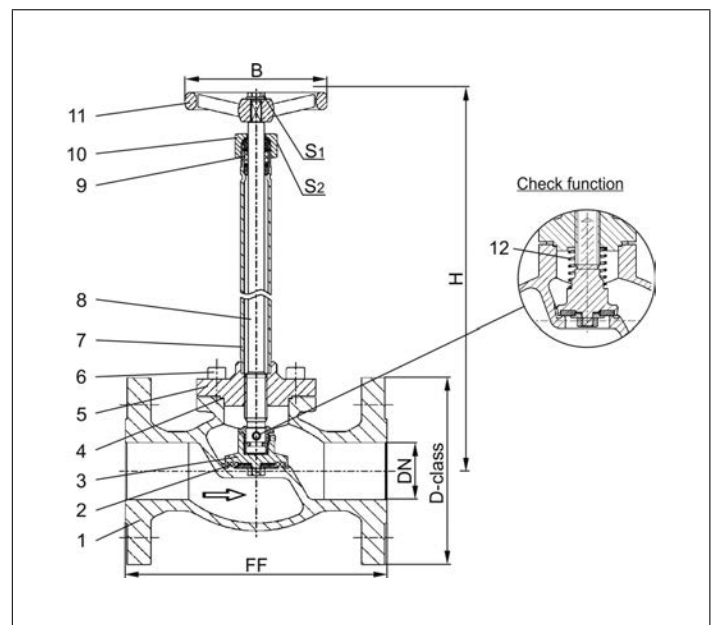

Type 03321 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	270 mm or 370 mm							370	420
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	5.0	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN50 (DN150=PN40)

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01341.X.001* (H = 270mm)

Part No. 01341.X.002* (H = 370mm)

Part No. 01341.X.501* (H = 270mm) Globe/Check Valve

Part No. 01341.X.502* (H = 370mm) Globe/Check Valve

*Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01341.X.0014 (H = 270mm)

Part No. 01341.X.0024 (H = 370mm)

Part No. 01341.X.5014 (H = 270mm) Globe/Check Valve

Part No. 01341.X.5024 (H = 370mm) Globe/Check Valve

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Extension H up to 900mm
- Valve with control disc (tapered design)
- Further pipe wall thicknesses

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	Aluminium alloy	
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

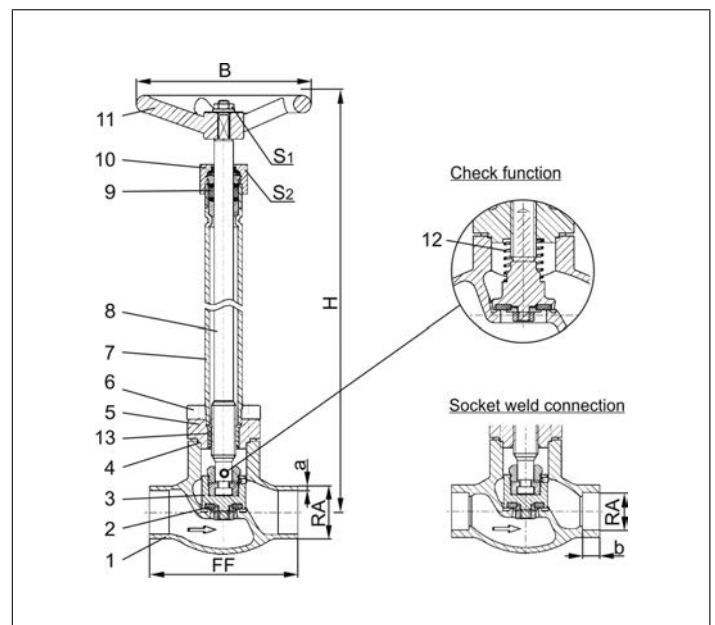

Type 01341 - Standard design	Technical data													
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100	150
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114	0168
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280	400
Height	H	270mm or 370mm												
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3	168.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0	7.1
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33	73.03	88.90	114.3	168.3
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40												
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20	20
Handwheel-Ø	B	100	100	100	100	100	125	125	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36	36	36	36	41	41
Weight	ca. kg	1.4	1.65	1.7	2.1	2.4	3.3	4.7	4.7	7.2	12.7	17.0	24.5	54.0
Kvs-Value	m ³ /h	1.6	3.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	1.9	4.4	5.0	7.8	13.4	16.2	23.9	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Cryogenic Globe Valves, PN25

Stainless steel body and topwork
"live loaded" gland packing

Part No. 01341.0219.001* (H=560)

Part No. 01341.0219.006* (H=1000)

*Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01341.0219.00*4

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

In flow direction, the valve with the nominal size DN200 is conform to tightness class L1 up to 12 bar maximum differential pressure acc. to DIN 12567 for LNG use.
This standard can also be used for the tightness class of other cryogenic gases.


Available options - on request only

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

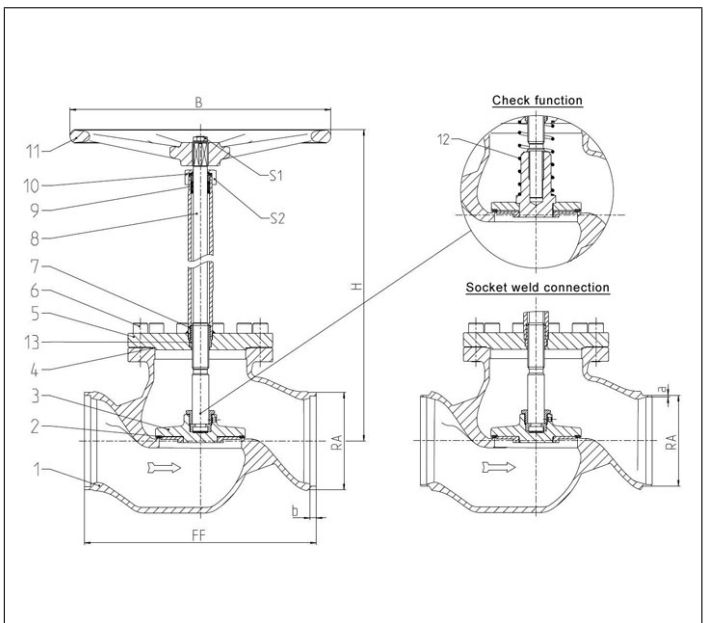

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 01341 - Standard design	Technical data	
Nominal size	DN	200
Dimension code	.X.	0219
Face-to-face dimension	FF	560
Height	H	560
Outside pipe-Ø ISO 1127	RA	219.1
Wall thickness pipe ISO 1127	a	6.3
Outside pipe-Ø ASTM A312	RA	219.1
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40
Socket depth	b	15
Handwheel-Ø	B	630
Wrench size across flats	S ₁	30
Wrench size across flats	S ₂	65
Weight	ca. kg	135
Kvs-Value	m ³ /h	680
Cv-Value	gal/min	786

Dimensions in mm.

Globe Valves

Type 01345 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, PN50

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01345.X.0011 (H = 270mm)

Part No. 01345.X.0021 (H = 370mm)

Part No. 01345.X.5011 (H = 270mm) Globe/Check Valve

Part No. 01345.X.5021 (H = 370mm) Globe/Check Valve

Female thread connection (G) acc. to ISO 228/1

Part No. 01345.X.0016 (H = 270mm)

Part No. 01345.X.0026 (H = 370mm)

Part No. 01345.X.5016 (H = 270mm) Globe/Check Valve

Part No. 01345.X.5026 (H = 370mm) Globe/Check Valve

Female thread connection NPT acc. to ANSI B 1.20.1

Available options - on request only:

- Female thread connection (R) acc. to ISO 7-Rc
- Extension H up to 900mm
- Valve with control disc (tapered design)

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	Aluminium alloy	
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

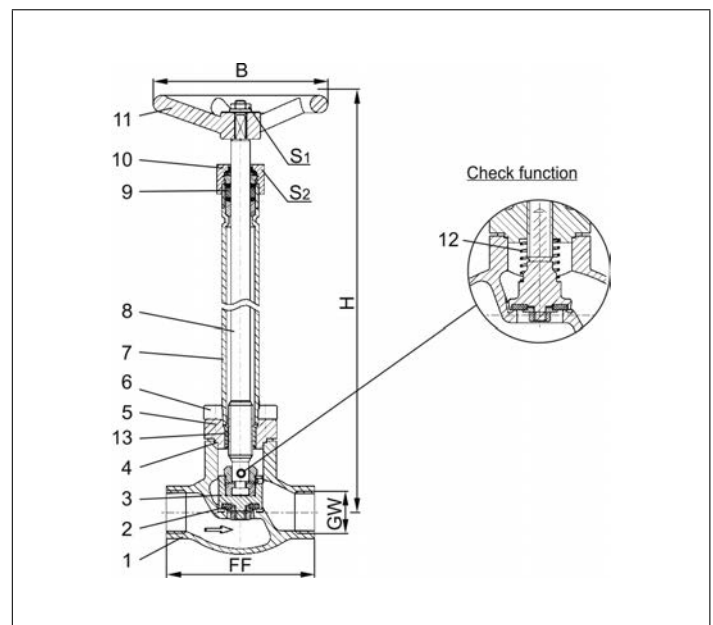

Type 01345 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	40	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	70	70	85	100	115	130	130	155
Height	H	270mm or 370mm							
Handwheel-Ø	B	100	100	100	100	100	125	125	125
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36
Weight	ca. kg	1.4	1.4	1.7	2.1	2.4	4.7	4.7	7.2
Kvs-Value	m ³ /h	1.6	2.2	4.3	6.7	11.5	20.6	22.6	37.1
Cv-Value	gal/min	1.9	2.6	5.0	7.8	13.4	23.9	26.3	43.2

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN40

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03341.X.0012 (H = 270mm)

Part No. 03341.X.0022 (H = 370mm)

Part No. 03341.X.5012 (H = 270mm) Globe/Check Valve

Part No. 03341.X.5022 (H = 370mm) Globe/Check Valve

Flanged connection acc. to DIN EN 1092-1 PN40

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	Aluminium alloy	
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

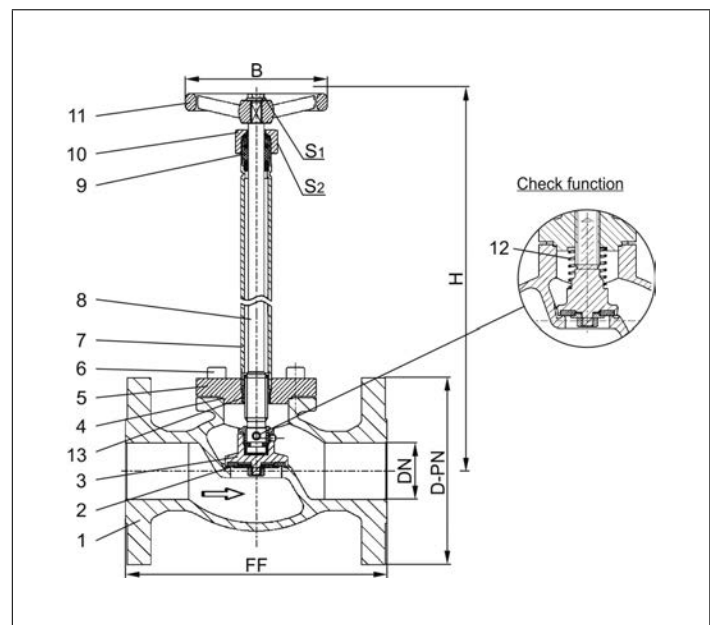

Type 03341 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	270 mm or 370 mm							370	420
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	5.0	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Cryogenic-Globe and Globe/Check Valves, class 300

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03341.X.0013 (H = 270mm)

Part No. 03341.X.0023 (H = 370mm)

Part No. 03341.X.5013 (H = 270mm) Globe/Check Valve

Part No. 03341.X.5023 (H = 370mm) Globe/Check Valve

Flanged connection acc. to ANSI B16.5 class 300

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	Aluminium alloy	
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

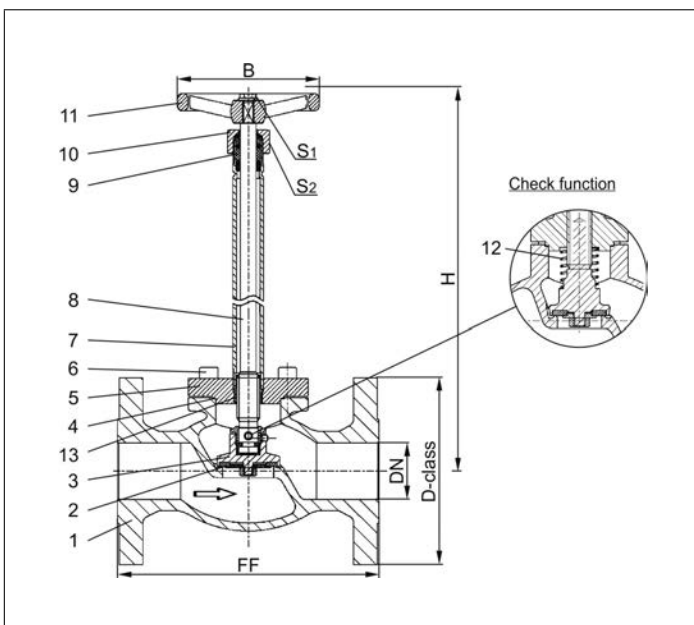

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03341 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	270 mm or 370 mm							370	420
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	5.0	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Cryogenic-Globe and Globe/Check Valves, class 150

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03341.X.0011 (H = 270mm)

Part No. 03341.X.0021 (H = 370mm)

Part No. 03341.X.5011 (H = 270mm) Globe/Check Valve

Part No. 03341.X.5021 (H = 370mm) Globe/Check Valve

Flanged connection acc. to ANSI B16.5 class 150

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	Aluminium alloy	
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

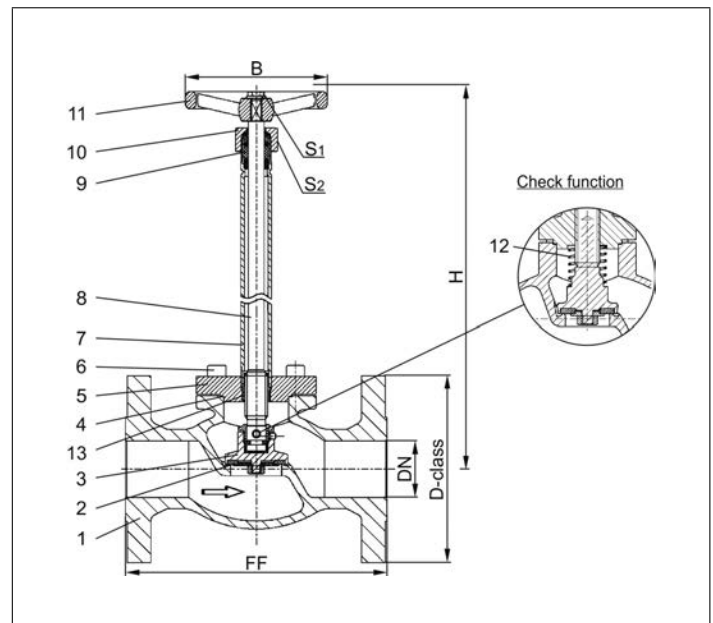

Type 03341 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	270 mm or 370 mm							370	420
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	5.0	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm.

Cryogenic Globe Valves, class 150

Stainless steel body and topwork,
"live loaded" gland packing

Part No. 03341.8000.0011 (H=560)

Flanged connection acc. to ANSI B16.5 class 150

In flow direction, the valve with the nominal size DN200 is conform to tightness class L1 up to 12 bar maximum differential pressure acc. to DIN 12567 for LNG use.
This standard can also be used for the tightness class of other cryogenic gases.

Available options - on request only




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
1a Flange	1.4301	A 276 Grade 304
2 Valve seal	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	1.4571	A 313 Grade 316Ti
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

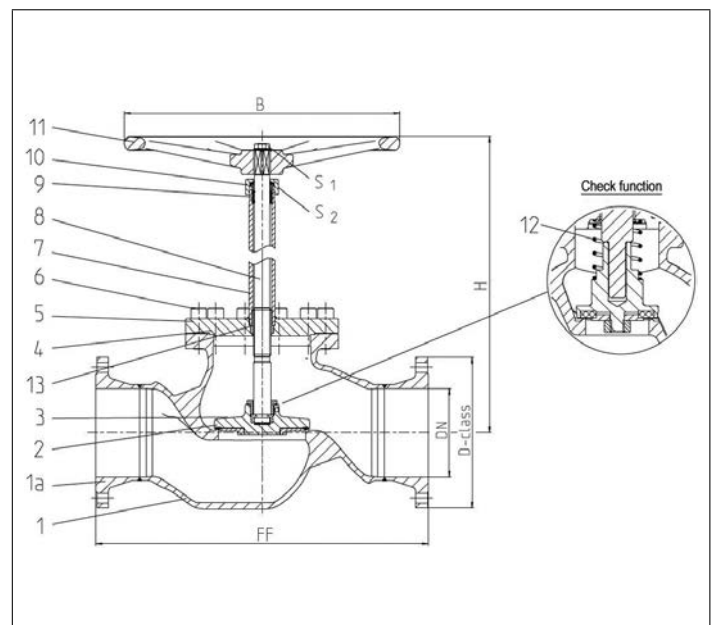

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03341 - Standard design	Technical data	
Nominal size	DN	200
Dimension code	.X.	8000
Flange-Ø	D-class	345
Face-to-face dimension	FF	760
Height	H	560
Handwheel-Ø	B	630
Wrench size across flats	S ₁	30
Wrench size across flats	S ₂	65
Weight	ca. kg	135
Kvs-Value	m ³ /h	680
Cv-Value	gal/min	786

Dimensions in mm.

Cryogenic-Bellow Sealed Globe Valve, PN50

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01252.X.002*

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01252.X.0024

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Extension H up to 900mm
- Valve with control disc (tapered design)
- Further pipe wall thicknesses

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.


Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Leak rate: 10⁻⁶ mbar ltr / sec outside

10⁻⁴ mbar ltr / sec seat

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bellow stem	1.4571	A 276 Grade 316Ti
7 Bolts	1.4301/A2	A 194 B8
8 Bellow	1.4571	A 276 Grade 316Ti
9 Elongation tube	1.4541	A 213 TP 321
10 Headpiece	1.4301	A 276 Grade 304
11 Bush	CW452K	B 159 UNS C51900
12 Stem	1.4301	A 276 Grade 304
13 Gland packing	Graphite / PTFE	
14 Gland nut	1.4305	A 276 Grade 303
15 Handwheel	Aluminium alloy	

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

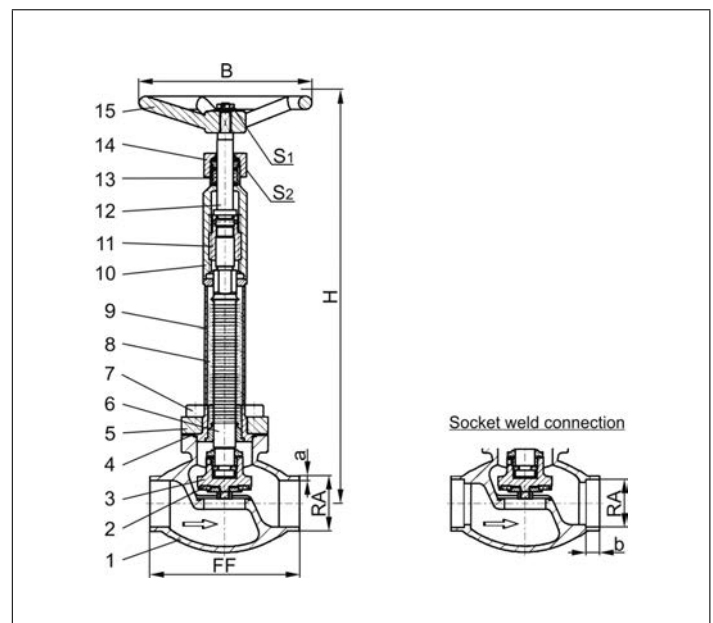

Type 01252 - Standard design		Technical data								
Nominal size	DN	10	15	15	20	25	32	40	40	50
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155
Height	H	380	380	380	380	380	380	380	380	380
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40								
Socket depth	b	6	10	10	13	13	-	13	13	16
Handwheel-Ø	B	150	150	150	150	150	150	150	150	150
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36	36
Weight	ca. kg	1.6	1.85	1.9	2.3	2.7	3.6	5.1	5.1	7.7
Kvs-Value	m ³ /h	1.6	2.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1
Cv-Value	gal/min	1.9	3.3	5.0	7.8	13.4	16.2	26.3	26.3	43.2

Dimensions in mm.

Globe Valves

Type 03252 - Bellow Sealed Globe Valve



Cryogenic-Bellow Sealed Globe Valve, PN40

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03252.X.0022

Flanged connection acc. to DIN EN 1092-1 PN40

Available options - on request only:


- Extension H up to 900mm
- Valve with control disc (tapered design)



Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)
Leak rate:: 10^{-6} mbar ltr / sec outside, 10^{-4} mbar ltr / sec seat

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bellow stem	1.4571	A 276 Grade 316Ti
7 Bolts	1.4301/A2	A 194 B8
8 Bellow	1.4571	A 276 Grade 316Ti
9 Elongation tube	1.4541	A 213 TP 321
10 Headpiece	1.4301	A 276 Grade 304
11 Bush	CW452K	B 159 UNS C51900
12 Stem	1.4301	A 276 Grade 304
13 Gland packing	Graphite / PTFE	
14 Gland nut	1.4305	A 276 Grade 303
15 Handwheel	Aluminium alloy	

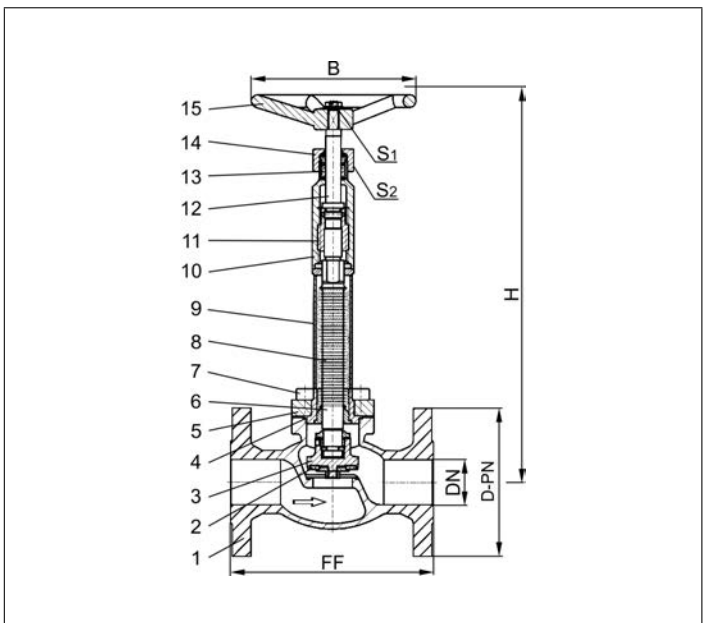

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03252 - Standard design	Technical data					
Nominal size	DN	15	20	25	40	50
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500
Flange-Ø	D-PN	95	105	115	150	165
Face-to-face dimension	FF	140	150	160	200	230
Height	H	380	380	380	380	380
Handwheel-Ø	B	150	150	150	150	150
Wrench size across flats	S ₁	7	7	7	10	10
Wrench size across flats	S ₂	30	30	30	36	36
Weight	ca. kg	3.5	5.0	5.2	10.1	13.8
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2

Dimensions in mm.

Cryogenic-Bellow Sealed Globe Valve, class 300

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03252.X.0023

Flanged connection acc. to ANSI B16.5 class 300

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)
Leak rate: 10⁻⁶ mbar ltr / sec outside, 10⁻⁴ mbar ltr / sec seat

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bellow stem	1.4571	A 276 Grade 316Ti
7 Bolts	1.4301/A2	A 194 B8
8 Bellow	1.4571	A 276 Grade 316Ti
9 Elongation tube	1.4541	A 213 TP 321
10 Headpiece	1.4301	A 276 Grade 304
11 Bush	CW452K	B 159 UNS C51900
12 Stem	1.4301	A 276 Grade 304
13 Gland packing	Graphite / PTFE	
14 Gland nut	1.4305	A 276 Grade 303
15 Handwheel	Aluminium alloy	

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

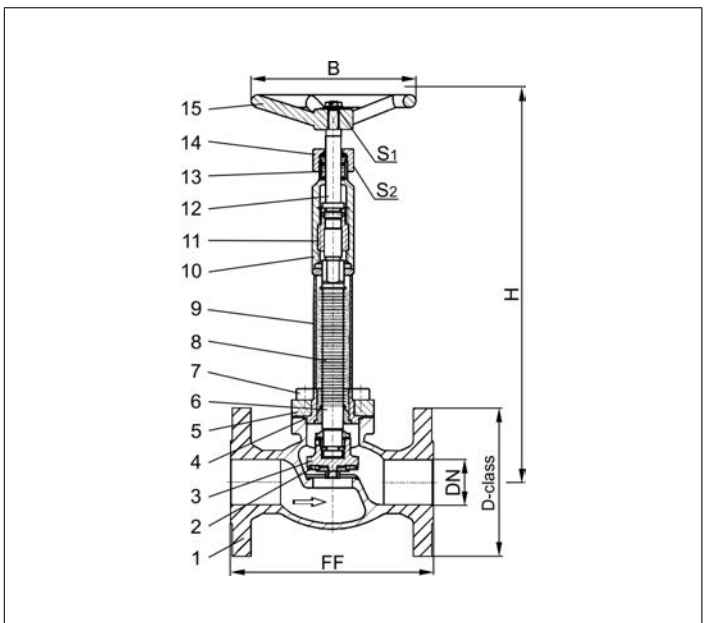

Type 03252 - Standard design	Technical data					
Nominal size	DN	15	20	25	40	50
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000
Flange-Ø	D-class	95	115	125	155	165
Face-to-face dimension	FF	140	150	160	200	230
Height	H	380	380	380	380	380
Handwheel-Ø	B	150	150	150	150	150
Wrench size across flats	S ₁	7	7	7	10	10
Wrench size across flats	S ₂	30	30	30	36	36
Weight	ca. kg	3.5	5.0	5.2	10.1	13.8
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2

Dimensions in mm.

Globe Valves

Type 03252 - Bellow Sealed Globe Valve



Cryogenic-Bellow Sealed Globe Valve, class 150

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03252.X.0021

Flanged connection acc. to ANSI B16.5 class 150

Available options - on request only:


- Extension H up to 900mm
- Valve with control disc (tapered design)



Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)
Leak rate: 10⁻⁶ mbar ltr / sec outside, 10⁻⁴ mbar ltr / sec seat

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bellow stem	1.4571	A 276 Grade 316Ti
7 Bolts	1.4301/A2	A 194 B8
8 Bellow	1.4571	A 276 Grade 316Ti
9 Elongation tube	1.4541	A 213 TP 321
10 Headpiece	1.4301	A 276 Grade 304
11 Bush	CW452K	B 159 UNS C51900
12 Stem	1.4301	A 276 Grade 304
13 Gland packing	Graphite / PTFE	
14 Gland nut	1.4305	A 276 Grade 303
15 Handwheel	Aluminium alloy	

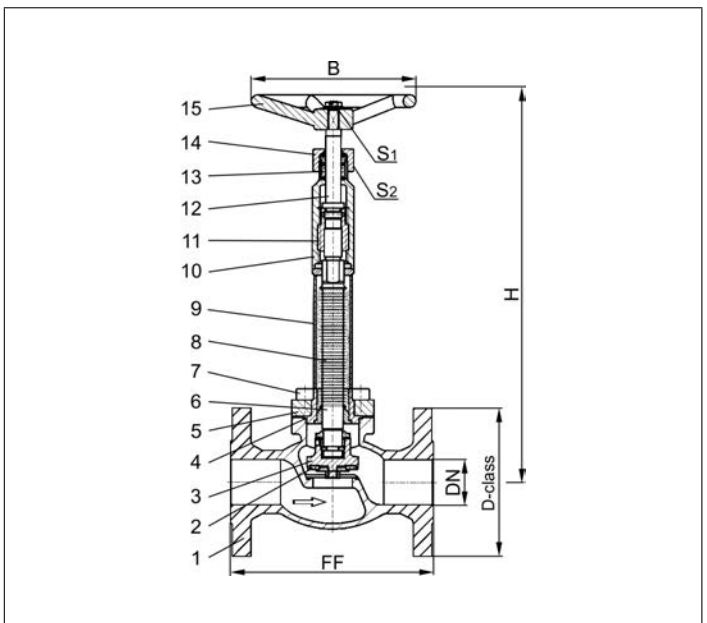

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03252 - Standard design	Technical data					
Nominal size	DN	15	20	25	40	50
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000
Flange-Ø	D-class	90	100	110	125	150
Face-to-face dimension	FF	140	150	160	200	230
Height	H	380	380	380	380	380
Handwheel-Ø	B	150	150	150	150	150
Wrench size across flats	S ₁	7	7	7	10	10
Wrench size across flats	S ₂	30	30	30	36	36
Weight	ca. kg	3.5	5.0	5.2	10.1	13.8
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2

Dimensions in mm.

Cryogenic-Globe Valves, PN50 (DN100=PN40)

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01420.X.0*81

Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Extension H and E acc. to customer specification
- Valve with check disc




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Guide bush	CC493K	B 505 UNS C93200
5 Stem	1.4301	A 276 Grade 304
6 Elongation tube	1.4541	A 213 TP 321
7 Elongation tube	1.4541	A 213 TP 321
8 Cold box feature	1.4301	A 276 Grade 304
9 Headpiece flange	1.4301	A 276 Grade 304
10 Headpiece	1.4301	A 276 Grade 304
11 Bolts	1.4301/A2	A 193 B8
12 Gland packing	Graphite / PTFE	
13 Gland nut	1.4404	A 276 Grade 316L
14 Handwheel	Aluminium alloy	

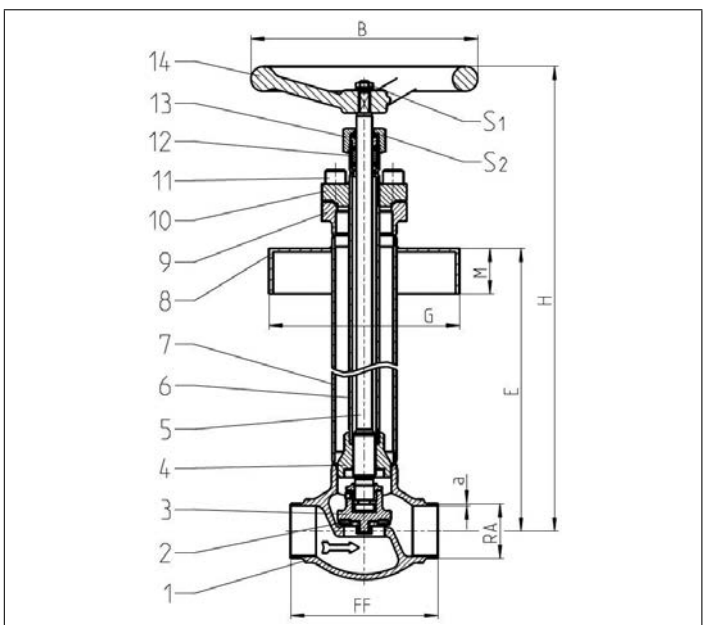

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 01420 - Standard design		Technical data								
Nominal size	DN	10	15	20	25	40	50	65	80	100
Dimension code	.X.	1013	1521	2026	2533	4048	5060	6573	8088	0114
Face-to-face dimension	FF	70	85	100	115	130	155	205	245	280
Height	H	690	690	690	690	710	780	790	840	960
Handwheel-Ø	B	100	100	100	100	200	200	250	315	315
Outside pipe -Ø ASTM A312	RA	13.50	21.34	26.67	33.40	48.26	60.33	73.02	88.90	114.30
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40								
Length	A	540	540	540	540	540	610	610	640	750
Length	G	acc. to customer specification								
Length	M	acc. to customer specification								
Wrench size across flats	S ₁	10	10	10	10	13	13	13	13	13
Wrench size across flats	S ₂	27	27	27	27	32	32	41	41	41
Weight	ca. kg	4.0	4.0	4.8	5.1	9.1	11.5	19.6	26.9	37.4
Kvs-Value	m ³ /h	1.6	4.3	6.7	11.5	22.6	37.1	71.1	104.0	168.0
Cv-Value	gal/min	1.9	5.0	7.8	13.4	26.3	43.2	83.2	121.7	196.6
Stroke	mm	11	12	12	12	15	19	23	25	30

Dimensions in mm.

Globe Valves

Type 1114 - Globe Valve

Cryogenic-Globe Valves, PN50

Stainless steel body and topwork,
Inner parts made of brass
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Available options - on request only:


- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Extension H up to 900mm
- Valve with control disc (tapered design)
- Disc with PCTFE seal
- Further connection types



Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)
Recommended working temperature (for versions without extension):
-60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc up to DN40	CW614N	B 283 UNS C38500
3a Disc from DN50	CW509L	B 111 UNS C28000
4 Bonnet gasket	PTFE	
5 Headpiece	1.4308	A 351 CF8
6 Bolts	1.4301/A2	A 320 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 479 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	
12 Spring	CW452K	B 159 UNS C51900
13 Bush	CW452K	B 159 UNS C51900
14 Sleeve	CW614N	B 283 UNS C38500

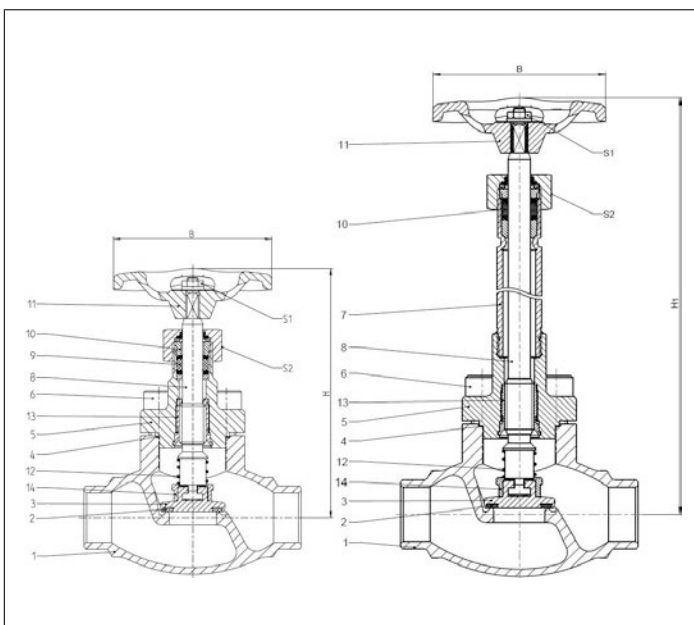


Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Technical Data - Standard design

Nominal size [DN]	Height (H) [mm]	Height (H ₁) [mm]	Handwheel-Ø (B) [mm]	Wrench size across flats (S ₁) [mm]	Wrench size across flats (S ₂) [mm]
10	140	270/370	100	7	27
15	140	270/370	100	7	27
20	140	270/370	100	7	27
25	140	270/370	100	7	27
40	175	270/370	125	10	32
50	200	270/370	125	10	32



Butt weld connection acc. to


· ISO 1127

DN	Face-to-face dim. (FF) [mm]	Outside pipe-Ø ISO (RA) [mm]	Wall thickness pipe ISO (a) [mm]	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.e.* [kg]	Part No.
10	70	13.5	2.3	1.6	1.9	0.85	1114.0135023.X0
15	85	17.2	1.6	3.8	4.4	0.96	1114.0172016.X0
15	85	21.3	2.0	4.3	5.0	0.98	1114.0213020.X0
20	100	26.9	2.0	6.7	7.8	1.43	1114.0269020.X0
25	115	33.7	2.6	11.5	13.4	1.92	1114.0337026.X0
40	130	42.4	2.6	20.6	23.9	3.49	1114.0424026.X0
40	130	48.3	2.6	22.6	26.3	3.36	1114.0483026.X0
50	155	60.3	2.6	37.1	43.2	4.94	1114.0603026.X0

Butt weld connection acc. to

· ASTM A312

DN	Face-to-face dim. (FF) [mm]	Outside pipe-Ø ASTM (RA) [mm]	Wall thickness pipe ASTM (a) [mm]	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.e.* [kg]	Part No.
10	70	13.7	2.3	1.6	1.9	0.85	1114.0137S40.X0
15	85	17.1	1.6	3.8	4.4	0.96	1114.0171S10.X0
15	85	21.3	2.1	4.3	5.0	0.98	1114.0213S10.X0
20	100	26.6	2.1	6.7	7.8	1.43	1114.0266S10.X0
25	115	33.4	2.7	11.5	13.4	1.92	1114.0334S10.X0
40	130	42.4	2.7	20.6	23.9	3.49	1114.0424S10.X0
40	130	48.2	2.7	22.6	26.3	3.36	1114.0482S10.X0
50	155	60.3	2.7	37.1	43.2	4.94	1114.0603S10.X0



Socket weld connection acc. to


· ISO 1127

· ASTM A312

DN	Face-to-face dim. (FF) [mm]	Socket depth (b) [mm]	Socket diameter (B) [mm]	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.e.* [kg]	Part No.
10	70	6.0	14.1	1.6	1.9	0.85	1114.0141000.X0
15	85	8.0	17.5	3.8	4.4	0.96	1114.0175000.X0
15	85	10.0	21.5	4.3	5.0	0.98	1114.0215000.X0
20	100	13.0	27.5	6.7	7.8	1.43	1114.0275000.X0
25	115	13.0	34.1	11.5	13.4	1.92	1114.0341000.X0
40	130	13.0	42.8	20.6	23.9	3.49	1114.0428000.X0
40	130	13.0	48.65	22.6	26.3	3.36	1114.0486000.X0
50	155	16.0	61.1	37.1	43.2	4.94	1114.0611000.X0

* w.e. = without extension

X = 0 (without extension), 1 (with 270mm extension), 2 (with 370mm extension)




Flanged connection acc. to

- DIN EN 1092-1 PN40
- ANSI B16.5 class 300

DN / NPS	Face-to-face dim. (FF) [mm]	Flange-Ø (D-PN) [mm]	Flange-Ø (D-class) [mm]	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.e.* [kg]	Part No. DIN EN	Part No. ANSI
15 / 1/2"	161	95	95	4.3	5.0	2.86	1114.015P040.X0	1114.015C300.X0
20 / 3/4"	181	105	115	6.7	7.8	3.72	1114.020P040.X0	1114.020C300.X0
25 / 1"	160	115	125	11.5	13.4	4.60	1114.025P040.X0	1114.025C300.X0
40 / 1-1/2"	200	150	155	22.6	26.3	8.62	1114.040P040.X0	1114.040C300.X0
50 / 2"	230	165	165	37.1	43.2	12.48	1114.050P040.X0	1114.050C300.X0

** welded version



Female thread connection acc. to

- ISO 228/1 (G)
- NPT acc. to ANSI B 1.20.1 (NPT)

DN	Face-to-face dim. (FF) [mm]	Thread size (GW)	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.e.* [kg]	Part No. G-thread	Part No. NPT-thread
10	70	1/4"	1.6	1.9	0.85	1114.FG02000.X0	1114.FN02000.X0
10	70	3/8"	2.2	2.6	0.85	1114.FG03000.X0	1114.FN03000.X0
15	85	1/2"	4.3	5.0	0.98	1114.FG04000.X0	1114.FN04000.X0
20	100	3/4"	6.7	7.8	1.43	1114.FG06000.X0	1114.FN06000.X0
25	115	1"	11.5	13.4	1.92	1114.FG10000.X0	1114.FN10000.X0
40	130	1-1/4"	20.6	23.9	3.49	1114.FG12000.X0	1114.FN12000.X0
40	130	1-1/2"	22.6	26.3	3.36	1114.FG14000.X0	1114.FN14000.X0
50	155	2"	37.1	43.2	4.94	1114.FG20000.X0	1114.FN20000.X0

Female thread connection acc. to

- ISO 7-1 (Rc or Rp)

DN	Face-to-face dim. (FF) [mm]	Thread size (GW)	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.e.* [kg]	Part No. Rc-thread	Part No. Rp-thread
10	70	1/4"	1.6	1.9	0.85	1114.FR02000.X0	1114.FP02000.X0
10	70	3/8"	2.2	2.6	0.85	1114.FR03000.X0	1114.FP03000.X0
15	85	1/2"	4.3	5.0	0.98	1114.FR04000.X0	1114.FP04000.X0
20	100	3/4"	6.7	7.8	1.43	1114.FR06000.X0	1114.FP06000.X0
25	115	1"	11.5	13.4	1.92	1114.FR10000.X0	1114.FP10000.X0
40	130	1-1/4"	20.6	23.9	3.49	1114.FR12000.X0	1114.FP12000.X0
40	130	1-1/2"	22.6	26.3	3.36	1114.FR14000.X0	1114.FP14000.X0
50	155	2"	37.1	43.2	4.94	1114.FR20000.X0	1114.FP20000.X0

* w.e. = without extension

X = 0 (without extension), 1 (with 270mm extension), 2 (with 370mm extension)

Globe Valves

Type 1116 - Globe Valve



Cryogenic-Globe Valves, PN50

Stainless steel body and topwork,
Inner parts made of stainless steel
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Available options - on request only:


- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Extension H up to 900mm
- Valve with control disc (tapered design)
- Disc with PTFE/Carbon filled (25%) seal
- Further connection types



Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)
Recommended working temperature (for versions without extension):
-60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PCTFE	
3 Disc	1.4301	A 479 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4308	A 351 CF8
6 Bolts	1.4301/A2	A 320 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 479 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	Aluminium alloy	
12 Spring	1.4310	A 276 Grade 301
13 Bush	1.4541	A 479 Grade 321
14 Sleeve	1.4571	A 276 Grade 316Ti

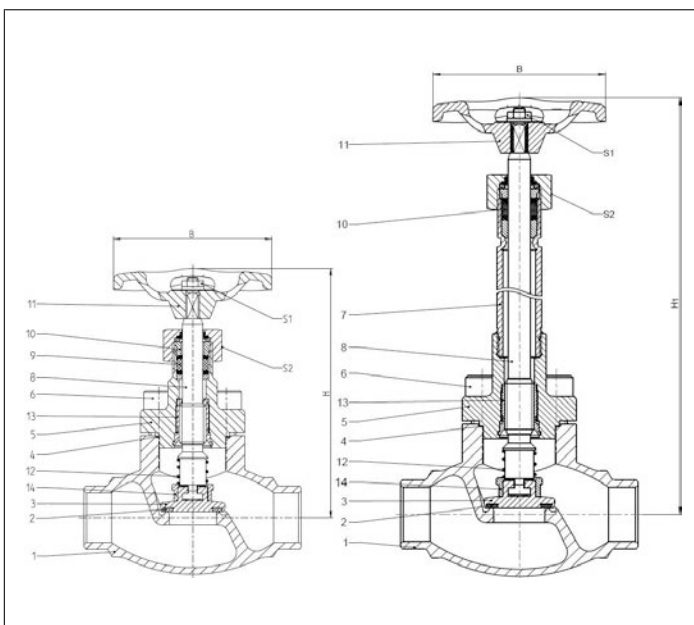


Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Technical Data - Standard design

Nominal size [DN]	Height (H) [mm]	Height (H ₁) [mm]	Handwheel-Ø (B) [mm]	Wrench size across flats (S ₁) [mm]	Wrench size across flats (S ₂) [mm]
10	140	270/370	100	7	27
15	140	270/370	100	7	27
20	140	270/370	100	7	27
25	140	270/370	100	7	27
40	175	270/370	125	10	32
50	200	270/370	125	10	32



Butt weld connection acc. to


· ISO 1127

DN	Face-to-face dim. (FF) [mm]	Outside pipe-Ø ISO (RA) [mm]	Wall thickness pipe ISO (a) [mm]	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.e.* [kg]	Part No.
10	70	13.5	2.3	1.6	1.9	0.85	1116.0135023.X0
15	85	17.2	1.6	3.8	4.4	0.96	1116.0172016.X0
15	85	21.3	2.0	4.3	5.0	0.98	1116.0213020.X0
20	100	26.9	2.0	6.7	7.8	1.43	1116.0269020.X0
25	115	33.7	2.6	11.5	13.4	1.92	1116.0337026.X0
40	130	42.4	2.6	20.6	23.9	3.49	1116.0424026.X0
40	130	48.3	2.6	22.6	26.3	3.36	1116.0483026.X0
50	155	60.3	2.6	37.1	43.2	4.94	1116.0603026.X0

Butt weld connection acc. to

· ASTM A312

DN	Face-to-face dim. (FF) [mm]	Outside pipe-Ø ASTM (RA) [mm]	Wall thickness pipe ASTM (a) [mm]	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.e.* [kg]	Part No.
10	70	13.7	2.3	1.6	1.9	0.85	1116.0137S40.X0
15	85	17.1	1.6	3.8	4.4	0.96	1116.0171S10.X0
15	85	21.3	2.1	4.3	5.0	0.98	1116.0213S10.X0
20	100	26.6	2.1	6.7	7.8	1.43	1116.0266S10.X0
25	115	33.4	2.7	11.5	13.4	1.92	1116.0334S10.X0
40	130	42.4	2.7	20.6	23.9	3.49	1116.0424S10.X0
40	130	48.2	2.7	22.6	26.3	3.36	1116.0482S10.X0
50	155	60.3	2.7	37.1	43.2	4.94	1116.0603S10.X0



Socket weld connection acc. to


· ISO 1127

· ASTM A312

DN	Face-to-face dim. (FF) [mm]	Socket depth (b) [mm]	Socket diameter (B) [mm]	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.e.* [kg]	Part No.
10	70	6.0	14.1	1.6	1.9	0.85	1116.0141000.X0
15	85	8.0	17.5	3.8	4.4	0.96	1116.0175000.X0
15	85	10.0	21.5	4.3	5.0	0.98	1116.0215000.X0
20	100	13.0	27.5	6.7	7.8	1.43	1116.0275000.X0
25	115	13.0	34.1	11.5	13.4	1.92	1116.0341000.X0
40	130	13.0	42.8	20.6	23.9	3.49	1116.0428000.X0
40	130	13.0	48.65	22.6	26.3	3.36	1116.0486000.X0
50	155	16.0	61.1	37.1	43.2	4.94	1116.0611000.X0

* w.e. = without extension

X = 0 (without extension), 1 (with 270mm extension), 2 (with 370mm extension)




Flanged connection acc. to

- DIN EN 1092-1 PN40
- ANSI B16.5 class 300

DN / NPS	Face-to-face dim. (FF) [mm]	Flange-Ø (D-PN) [mm]	Flange-Ø (D-class) [mm]	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.e.* [kg]	Part No. DIN EN	Part No. ANSI
15 / 1/2"	161	95	95	4.3	5.0	2.86	1116.015P040.X0	1116.015C300.X0
20 / 3/4"	181	105	115	6.7	7.8	3.72	1116.020P040.X0	1116.020C300.X0
25 / 1"	160	115	125	11.5	13.4	4.60	1116.025P040.X0	1116.025C300.X0
40 / 1-1/2"	200	150	155	22.6	26.3	8.62	1116.040P040.X0	1116.040C300.X0
50 / 2"	230	165	165	37.1	43.2	12.48	1116.050P040.X0	1116.050C300.X0

** welded version



Female thread connection acc. to

- ISO 228/1 (G)
- NPT acc. to ANSI B 1.20.1 (NPT)

DN	Face-to-face dim. (FF) [mm]	Thread size (GW)	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.e.* [kg]	Part No. G-thread	Part No. NPT-thread
10	70	1/4"	1.6	1.9	0.85	1116.FG02000.X0	1116.FN02000.X0
10	70	3/8"	2.2	2.6	0.85	1116.FG03000.X0	1116.FN03000.X0
15	85	1/2"	4.3	5.0	0.98	1116.FG04000.X0	1116.FN04000.X0
20	100	3/4"	6.7	7.8	1.43	1116.FG06000.X0	1116.FN06000.X0
25	115	1"	11.5	13.4	1.92	1116.FG10000.X0	1116.FN10000.X0
40	130	1-1/4"	20.6	23.9	3.49	1116.FG12000.X0	1116.FN12000.X0
40	130	1-1/2"	22.6	26.3	3.36	1116.FG14000.X0	1116.FN14000.X0
50	155	2"	37.1	43.2	4.94	1116.FG20000.X0	1116.FN20000.X0

Female thread connection acc. to

- ISO 7-1 (Rc or Rp)

DN	Face-to-face dim. (FF) [mm]	Thread size (GW)	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.e.* [kg]	Part No. Rc-thread	Part No. Rp-thread
10	70	1/4"	1.6	1.9	0.85	1116.FR02000.X0	1116.FP02000.X0
10	70	3/8"	2.2	2.6	0.85	1116.FR03000.X0	1116.FP03000.X0
15	85	1/2"	4.3	5.0	0.98	1116.FR04000.X0	1116.FP04000.X0
20	100	3/4"	6.7	7.8	1.43	1116.FR06000.X0	1116.FP06000.X0
25	115	1"	11.5	13.4	1.92	1116.FR10000.X0	1116.FP10000.X0
40	130	1-1/4"	20.6	23.9	3.49	1116.FR12000.X0	1116.FP12000.X0
40	130	1-1/2"	22.6	26.3	3.36	1116.FR14000.X0	1116.FP14000.X0
50	155	2"	37.1	43.2	4.94	1116.FR20000.X0	1116.FP20000.X0

* w.e. = without extension

X = 0 (without extension), 1 (with 270mm extension), 2 (with 370mm extension)

Globe Valves

Type 11C01 - Globe Valve FullX



Cryogenic-Globe Valves, PN63

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Butt weld connection for stainless steel pipes acc. to ISO 1127

Available options - on request only:

· Further connection types




Applications:

Approved for air gases, vapours and cryogenic liquefied gases.

Working temperature: -269°C / -452°F (4K) up to +80°C / +176°F (353K)

Materials	DIN EN	ASTM
1 Body	1.4571	A 313 Grade 316TI
2 Valve seal	PCTFE	
3 Disc	1.4571	A 313 Grade 316TI
4 Guide	PTFE / Carbon filled (25%)	
5 Tube	1.4571	A 313 Grade 316TI
6 Hollow stem	1.4571	A 313 Grade 316TI
7 Collar	1.4404	A 276 Grade 316L
8 Flange	1.4404	A 276 Grade 316L
9 Bonnet gasket	PTFE	
10 Bushing	CW452K	B 159 UNS C51900
11 Bolt	A4-70	A 194 B8M
12 Threaded bushing	CW452K	B 159 UNS C51900
13 Head piece	1.4404	A 276 Grade 316L
14 Ball bearing	1.4125	440C
15 Sliding bushing	CW452K	B 159 UNS C51900
16 Stem ring	CW452K	B 159 UNS C51900
17 Gasket	PTFE / Carbon filled (25%)	
18 Cap	PVC	
19 Gland bolt	1.4404	A 276 Grade 316L
20 Wiper	PEEK	
21 Stem	1.4404	A 276 Grade 316L
22 Handwheel	1.4409	A 351 CF3M

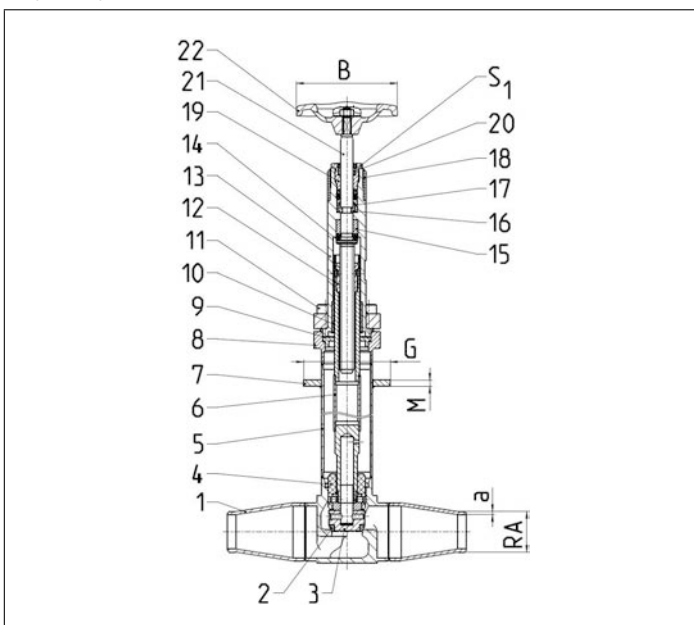

Standard marking acc. to Pressure Equipment
Directive 2014/68/EU (PED).




Technical Data - Standard design

Nominal size	Length (G)	Length (M)	Handwheel-Ø (B)	Wrench size across flats (S ₁)	Outside pipe-Ø ISO	Wall thickness pipe ISO
[DN]	[mm]	[mm]	[mm]	[mm]	(RA) [mm]	(a) [mm]
25	72	5	100	22	33.7	2.6
50	109	5	100	22	60.3	2.9

Globe Valves


Type 11C01 - Globe Valve FullX

Body types




Straight body

DN	Face-to-face dim. (FF) [mm]	Height (H) [mm]	Length (E) [mm]	Kvs-value [m ³ /h]	Cv-value [gal/min]	Weight [kg]	Part No.
25	198	560	330	12.3	14.3	3.82	11C01.A001.000001
50	288	665	410	44.0	51.2	9.69	11C01.A001.000004



Body angle type

DN	Face-to-face dim. (FF) [mm]	Height (H) [mm]	Length (E) [mm]	Length (L) [mm]	Kvs-value [m ³ /h]	Cv-value [gal/min]	Weight [kg]	Part No.
25	99	560	330	104	22.3	25.9	3.75	11C01.A001.000002
50	144	665	410	149	80.0	93.0	9.44	11C01.A001.000005



Body Y type

DN	Face-to-face dim. (FF) [mm]	Height (H) [mm]	Length (E) [mm]	Kvs-value [m ³ /h]	Cv-value [gal/min]	Weight [kg]	Part No.
25	135	605	375	14.4	16.7	4.16	11C01.A001.000003
50	170	715	460	69.8	81.1	9.42	11C01.A001.000006

Angle Valves

Type 01332 - Globe Valve Angle Type



Cryogenic-Globe Valves Angle Type, PN50

Stainless steel body and bronze topwork,
 "live loaded" Stainless steel body and bronze topwork,
 "cleaned and degreased for oxygen service"

Part No. 01332.X.000*


* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01332.X.0004

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Valve with control disc (tapered design)
- Valve with check disc
- Further pipe wall thicknesses

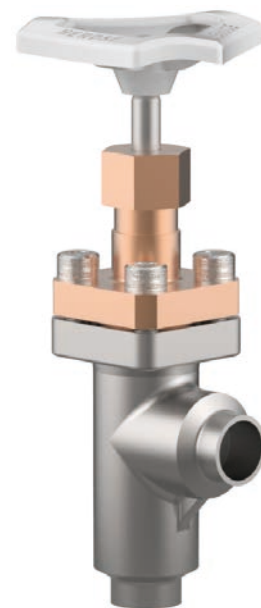

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N B 283 UNS C38500	
4 Bonnet gasket	PTFE	
5 Headpiece	CC493K B 505 UNS C93200	
6 Bolts	1.4301/A2 A 194 B8	
7 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N B 283 UNS C38500	
11 Handwheel	Aluminium alloy	

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

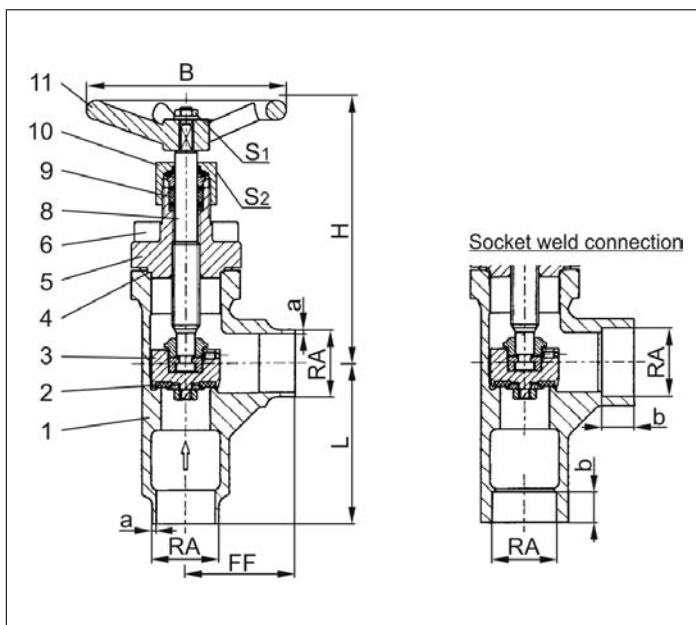

Type 01332 - Standard design	Technical data						
Nominal size	DN	15	20	25	32	40	50
Dimension code	.X.	1521	2026	2533	3242	4048	5060
Face-to-face dimension	FF	40	50	55	60	58	85
Height	H	140	140	140	170	175	200
Outside pipe-Ø ISO 1127	RA	21.3	26.9	33.7	42.0	48.3	60.3
Wall thickness pipe ISO 1127	a	2.0	2.0	2.0	2.0	2.0	2.0
Outside pipe-Ø ASTM A312	RA	21.34	26.67	33.4	-	48.26	60.33
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40					
Socket depth	b	10	13	13	13	13	16
Handwheel-Ø	B	100	100	100	125	125	125
Length	L	50	65	80	80	90	90
Wrench size across flats	S ₁	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	36	36	36
Weight	ca. kg	1.0	1.3	1.7	3.1	3.3	6.0
Kvs-Value	m ³ /h	6.0	10.5	17.2	32.0	35.0	57.0
Cv-Value	gal/min	7.0	12.2	20.0	37.2	40.7	66.3

Dimensions in mm.

Angle Valves

Type 01352 - Globe Valve Angle Type

HEROSE



Cryogenic-Globe Valves Angle Type, PN50

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01352.X.000*

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01352.X.0004

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Valve with control disc (tapered design)
- Valve with check disc
- Further pipe wall thicknesses



Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	Aluminium alloy	
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

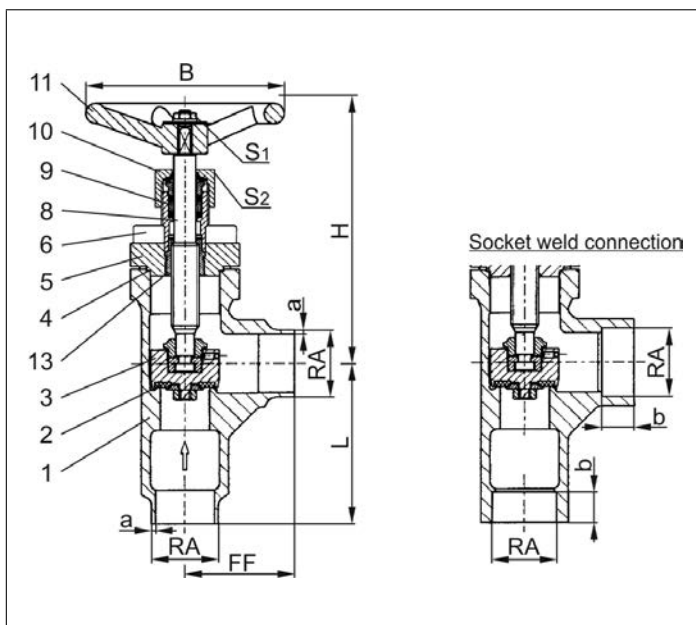

Type 01352 - Standard design	Technical data						
Nominal size	DN	15	20	25	32	40	50
Dimension code	.X.	1521	2026	2533	3242	4048	5060
Face-to-face dimension	FF	40	50	55	60	58	85
Height	H	140	140	140	170	175	200
Outside pipe-Ø ISO 1127	RA	21.3	26.9	33.7	42.0	48.3	60.3
Wall thickness pipe ISO 1127	a	2.0	2.0	2.0	2.0	2.0	2.0
Outside pipe-Ø ASTM A312	RA	21.34	26.67	33.4	-	48.26	60.33
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40					
Socket depth	b	10	13	13	13	13	16
Handwheel-Ø	B	100	100	100	125	125	125
Length	L	50	65	80	80	90	90
Wrench size across flats	S ₁	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	36	36	36
Weight	ca. kg	1.0	1.3	1.7	3.1	3.3	6.0
Kvs-Value	m ³ /h	6.0	10.5	17.2	32.0	35.0	57.0
Cv-Value	gal/min	7.0	12.2	20.0	37.2	40.7	66.3

Dimensions in mm.

Angle Valves

Type 01322 - Globe Valve Angle Type



Cryogenic-Globe Valves Angle Type, PN50

Stainless steel body and bronze topwork
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 01322.X.001* (H = 270mm)

Part No. 01322.X.002* (H = 370mm)

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01322.X.0014 (H = 270mm)

Part No. 01322.X.0024 (H = 370mm)

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)
- Valve with check disc
- Further pipe wall thicknesses




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpieceflansch	CC493K	B 505 UNS C93200
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Handwheel	Aluminium alloy	

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

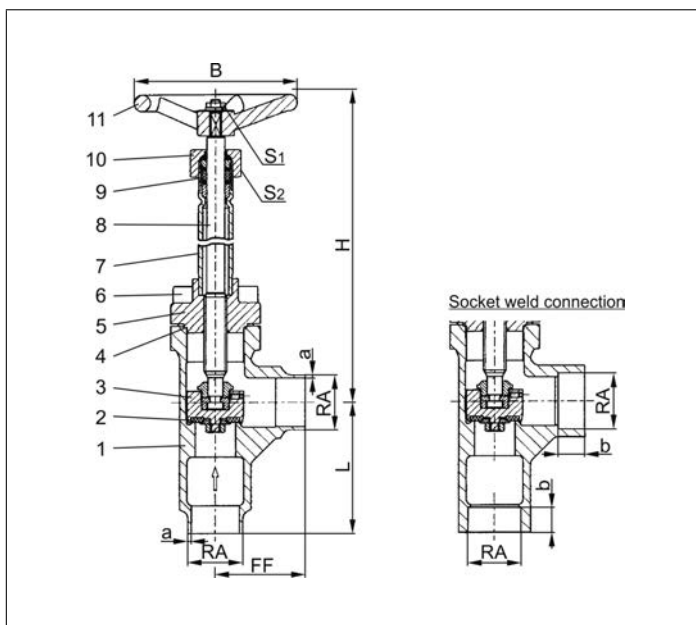

Type 01322 - Standard design	Technical data						
Nominal size	DN	15	20	25	32	40	50
Dimension code	.X.	1521	2026	2533	3242	4048	5060
Face-to-face dimension	FF	40	50	55	60	58	85
Height	H	270mm or 370mm					
Outside pipe-Ø ISO 1127	RA	21.3	26.9	33.7	42.0	48.3	60.3
Wall thickness pipe ISO 1127	a	2.0	2.0	2.0	2.0	2.0	2.0
Outside pipe-Ø ASTM A312	RA	21.34	26.67	33.40	-	48.26	60.33
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40					
Socket depth	b	10	13	13	13	13	16
Handwheel-Ø	B	100	100	100	125	125	125
Length	L	50	65	80	80	90	90
Wrench size across flats	S ₁	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	36	36	36
Weight	ca. kg	1.4	1.6	2.2	4.0	4.3	6.5
Kvs-Value	m ³ /h	6.0	10.5	17.2	32.0	35.0	57.0
Cv-Value	gal/min	7.0	12.2	20.0	37.2	40.7	66.3

Dimensions in mm.

Angle Valves

Type 01342 - Globe Valve Angle Type



Cryogenic-Globe and Globe/Check Valves, PN50

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01342.X.001* (H = 270mm)

Part No. 01342.X.002* (H = 370mm)

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01342.X.0014 (H = 270 mm)

Part No. 01342.X.0024 (H = 370 mm)

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)
- Valve with check disc
- Further pipe wall thicknesses


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	Aluminium alloy	
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

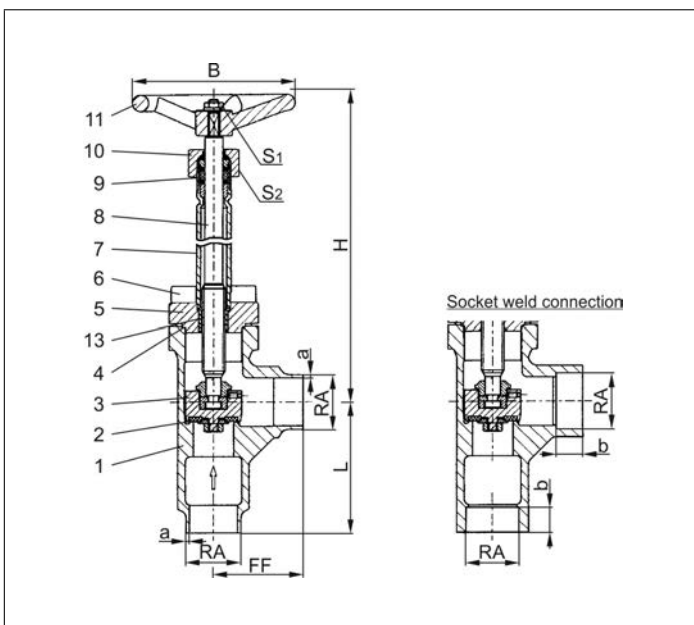

Type 01342 - Standard design	Technical data						
Nominal size	DN	15	20	25	32	40	50
Dimension code	.X.	1521	2026	2533	3242	4048	5060
Face-to-face dimension	FF	40	50	55	60	58	85
Height	H	270 mm or 370 mm					
Outside pipe-Ø ISO 1127	RA	21.3	26.9	33.7	42.0	48.3	60.3
Wall thickness pipe ISO 1127	a	2.0	2.0	2.0	2.0	2.0	2.0
Outside pipe-Ø ASTM A312	RA	21.34	26.67	33.4	-	48.26	60.33
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40					
Socket depth	b	10	13	13	13	13	16
Handwheel-Ø	B	100	100	100	125	125	125
Length	L	50	65	80	80	90	90
Wrench size across flats	S ₁	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	36	36	36
Weight	ca. kg	1.4	1.6	2.2	4.0	4.3	6.5
Kvs-Value	m ³ /h	6.0	10.5	17.2	32.0	35.0	57.0
Cv-Value	gal/min	7.0	12.2	20.0	37.2	40.7	66.3

Dimensions in mm.

Gate Valves

Type 09340 - Gate Valve



Cryogenic-Gate Valves, PN50

Stainless steel body and topwork,
one way tightening (in flow direction),
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 09340.X.001* (Height H for size DN25, DN40 und DN100)

Part No. 09340.X.002* (Height H for size DN50, DN65 und DN80)

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 09340.X.0014 (Height H for size DN25, DN40 und DN100)

Part No. 09340.X.0024 (Height H for size DN50, DN65 und DN80)

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Further pipe wall thicknesses




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Wedge	1.4308	A 351 CF8
5 Stem	1.4301	A 276 Grade 304
6 Bonnet gasket	PTFE	
7 Headpiece	1.4308	A 351 CF8
8 Bolts	1.4301/A2	A 194 B8
9 Elongation tube	1.4541	A 213 TP 321
10 Gland packing	Graphite / PTFE	
11 Gland nut	1.4305	A 276 Grade 303
12 Handwheel	Aluminium alloy	
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment
Directive 2014/68/EU (PED).

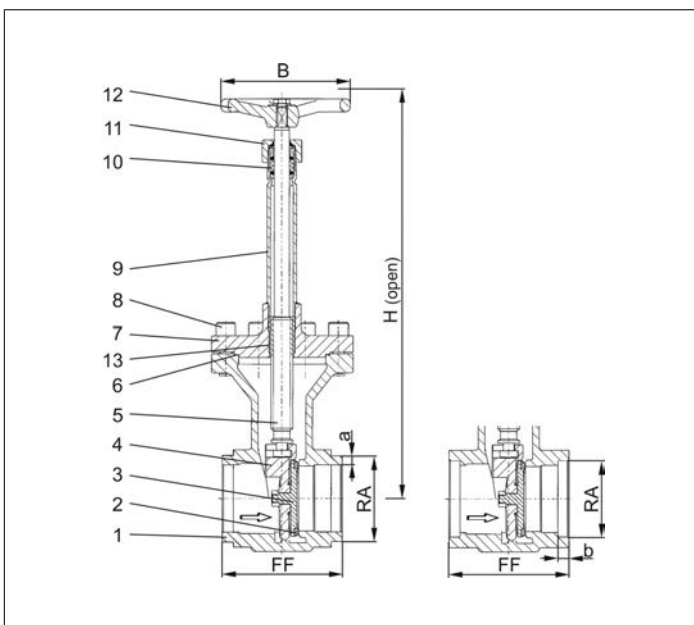

Type 09340 - Standard design	Technical data						
Nominal size	DN	25	40	50	65	80	100
Dimension code	.X.	2533	4048	5060	657x	8088	0114
Face-to-face dimension	FF	133	133	110	110	110	130
Height	H	330	360	410	440	450	570
Outside pipe-Ø ISO 1127	RA	33.7	48.3	60.3	76.1	88.9	114.3
Wall thickness pipe ISO 1127	a	2.0	2.0	2.0	2.6	3.2	3.2
Outside pipe-Ø ASTM A312	RA	33.40	48.26	60.33	73.03	88.90	114.3
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40					
Socket depth	b	8	13	16	16	16	20
Handwheel-Ø	B	125	125	150	150	150	200
Weight	ca. kg	3.3	4.8	7.5	8.6	11.4	21.8
Kvs - Value	m ³ /h	43	93	125	283	310	792
Cv - Value	gal/min	51	111	149	337	369	943

Dimensions in mm.

Gate Valves

Type 09345 - Gate valve



Cryogenic-Gate Valves, PN50

Stainless steel body and topwork,
one way tightening (in flow direction),
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 09345.X.0011*

Female thread connection (G) acc. to ISO 228/1

Part No. 09345.X.0015

Female thread connection (R) acc. to ISO 7-Rc

Part No. 09345.X.0016

Female thread connection (NPT) acc. to ANSI 1.20.1




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Wedge	1.4308	A 351 CF8
5 Stem	1.4301	A 276 Grade 304
6 Bonnet gasket	PTFE	
7 Headpiece	1.4308	A 351 CF8
8 Bolts	1.4301/A2	A 194 B8
9 Elongation tube	1.4541	A 213 TP 321
10 Gland packing	Graphite / PTFE	
11 Gland nut	1.4305	A 276 Grade 303
12 Handwheel	Aluminium alloy	
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment
Directive 2014/68/EU (PED).

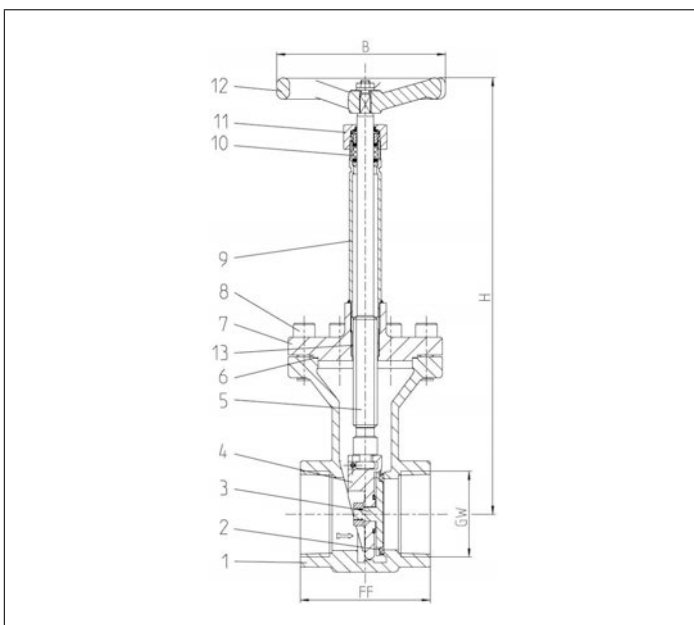

Type 09345 - Standard design	Technical data				
Nominal size	DN	25	40	50	65
Thread size	GW	1	1-1/2	2	2-1/2
Dimension code	.X.	1000	1400	2000	2400
Face-to-face dimension	FF	133	133	110	110
Height	H	330	360	410	440
Handwheel-Ø	B	125	125	150	150
Weight	ca. kg	3.3	4.8	7.5	8.6
Kvs - Value	m³/h	43	93	125	283
Cv - Value	gal/min	51	111	149	337

Dimensions in mm.

Gate Valves

Type 09440 - Gate valve



Cryogenic-Gate Valves, PN50

Stainless steel body and topwork,
one way tightening (in flow direction),
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 09440.X.0121

Male thread for union connection




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW452K	B 159 UNS C51900
4 Wedge	1.4308	A 351 CF8
5 Stem	1.4301	A 276 Grade 304
6 Bonnet gasket	PTFE	
7 Headpiece	1.4301	A 276 Grade 304
8 Bolts	1.4301/A2	A 194 B8
9 Elongation tube	1.4541	A 213 TP 321
10 Gland packing	Graphite / PTFE	
11 Gland nut	1.4305	A 276 Grade 303
12 Handwheel	Aluminium alloy	
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment
Directive 2014/68/EU (PED).

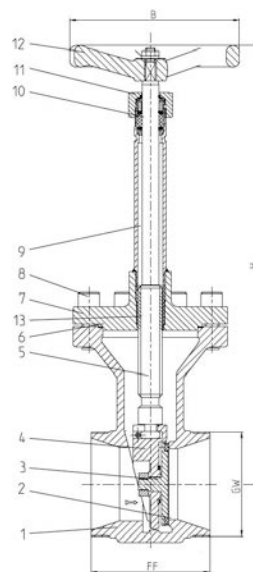

Type 09440 - Standard design	Technical data				
Nominal size	DN	25	40	50	65
Thread size (G- / M-thread)	GW	- / M40x2	G2 / M65x2	G2-1/2 / M78x2	G3 / M88x2
Dimension code	.X.	0250	0400	0500	0650
Face-to-face dimension	FF	133	133	110	100
Height	H	330	360	410	440
Handwheel-Ø	B	125	125	150	150
Weight	ca. kg	3.3	4.8	7.5	8.6
Kvs - Value	m³/h	43	93	125	283
Cv - Value	gal/min	51	111	149	337

Dimensions in mm.

Gate Valves

Type 09440 - Gate valve



Cryogenic-Gate Valves, PN50

Stainless steel body and topwork,
one way tightening (in flow direction),
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 09440.X.002*

Completed with union type butt weld fittings for stainless steel pipes
acc.to ISO 1127 or ASTM A312

Available options - on request only:


- Further pipe wall thicknesses



Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW452K	B 159 UNS C51900
4 Wedge	1.4308	A 351 CF8
5 Stem	1.4301	A 276 Grade 304
6 Bonnet gasket	PTFE	
7 Headpiece	1.4301	A 276 Grade 304
8 Bolts	1.4301/A2	A 194 B8
9 Elongation tube	1.4541	A 213 TP 321
10 Gland packing	Graphite / PTFE	
11 Gland nut	1.4305	A 276 Grade 303
12 Handwheel	Aluminium alloy	
13 Bush	CW452K	B 159 UNS C51900
14 Weld fitting	1.4301	A 276 Grade 304
15 Union nut	1.4301	A 276 Grade 304

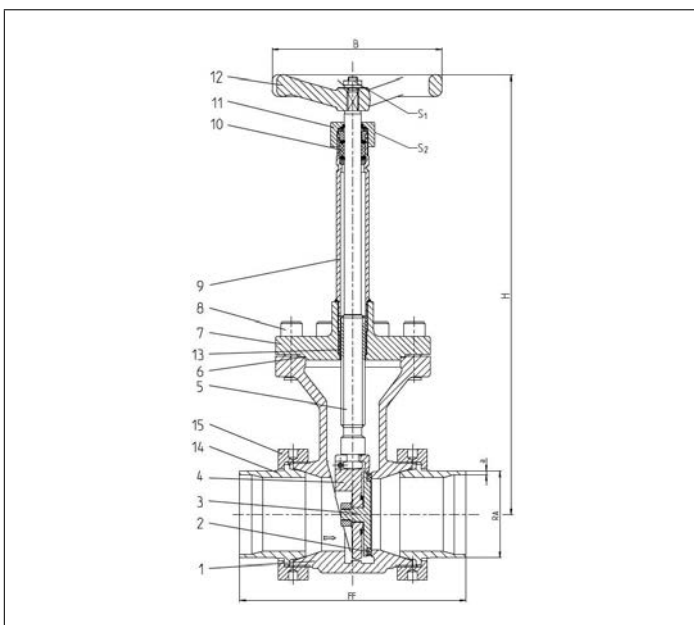

Standard marking acc. to Pressure Equipment
Directive 2014/68/EU (PED).



Type 09440 - Standard design	Technical data				
Nominal size	DN	25	40	50	65
Dimension code	.X.	2533	4048	5060	657x
Face-to-face dimension	FF	193	193	170	160
Height	H	330	360	410	440
Outsid pipe-Ø ISO 1127	RA	33.7	48.3	60.3	76.1
Wall thickness pipe ISO 1127	a	2.0	2.0	2.0	2.6
Outsid pipe-Ø ASTM A312	RA	33.40	48.26	60.33	73.03
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40			
Handwheel-Ø	B	125	125	150	150
Weight	ca. kg	3.5	5.1	7.8	9.0
Kvs - Value	m³/h	43	93	125	283
Cv - Value	gal/min	51	111	149	337

Dimensions in mm.

Fill Cluster

Type 07003 - Fill cluster with check function



Cryogenic-Fill cluster, PN50


Bronze body and topwork
with check function and drain valve
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 07003.X.7027

Fill connection: Female thread type R (BSPT) acc. to ISO 7-Rc
Outlet: 2x complete with brazed stainless steel stubs acc. to ASTM A312
Non-return unit metal to metal seated, leakage rate D acc. to EN12266-1

Available options - on request only:


- brazed stainless steel stubs acc. to ISO 1127
- integrable strainer

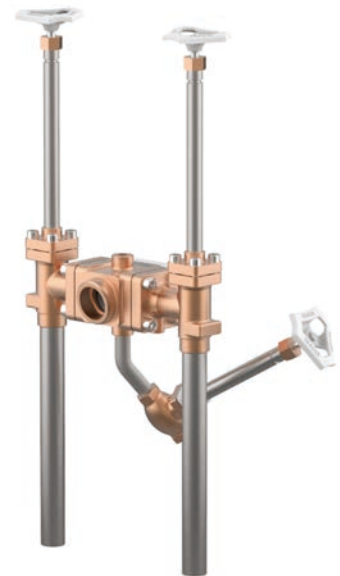

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Fill body	CC491K	B 62 UNS C83600
2 Body	CC491K	B 62 UNS C83600
3 Valve seal	PTFE / Carbon filled (25%)	
4 Disc	CW614N	B 283 UNS C38500
5 Bonnet gasket	PTFE	
6 Headpiece	CC493K	B 505 UNS C93200
7 Bolts	1.4301/A2	A 194 B8
8 Elongation tube	1.4541	A 213 TP 321
9 Stem	1.4301	A 276 Grade 304
10 Gland packing	Graphite / PTFE	
11 Gland nut	CW614N	B 283 UNS C38500
12 Handwheel	Aluminium alloy	
14 Check disc	CW452K	B 159 UNS C51900
15 Spring	1.4571	A 313 Grade 316Ti
16 Cap	CC491K	B 62 UNS C83600
17 Stainless steel stubs	1.4306	A 312 TP304L

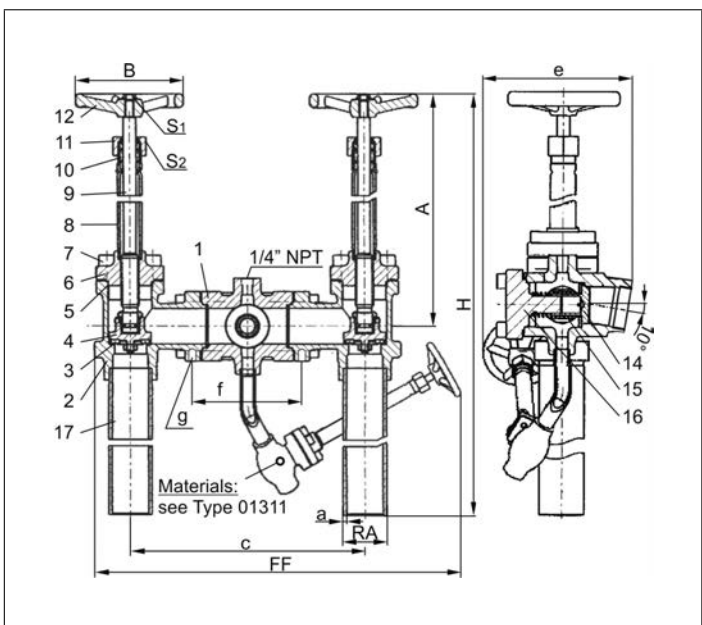

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 07003 - Standard design	Technical data		
Nominal size	DN	25	40
Dimension code	.X.	2533	4048
Face-to-face dimension	FF	340	340
Outside pipe-Ø ASTM A312	RA	33.40	48.26
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40	
Height	A	370	370
Height	H	735	735
Length	c	260	260
Length	e	172	172
Length	f	125	125
Thread	g	M10. 11 mm deep	M12. 13 mm deep
Handwheel-Ø	B	100	125
Wrench size across flats	S ₁	7	10
Wrench size across flats	S ₂	30	36
Weight	ca. kg	14.4	18.4

Dimensions in mm.

Fill Cluster

Type 07004 - Fill cluster with check function



Cryogenic-Fill cluster, PN50

Bronze body and topwork
with check function and drain valve
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 07004.X.7027

Fill connection: Mueller flange
Outlet: 2x complete with brazed stainless steel stubs acc. to ASTM A312
Non-return unit metal to metal seated, leakage rate D acc. to EN12266-1

Available options - on request only:


- brazed stainless steel stubs acc. to ISO 1127
- integrable strainer



Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / 248°F (393K)

Materials	DIN EN	ASTM
1 Fill body	CC491K	B 62 UNS C83600
2 Body	CC491K	B 62 UNS C83600
3 Valve seal	PTFE / Carbon filled (25%)	
4 Disc	CW614N	B 283 UNS C38500
5 Bonnet gasket	PTFE	
6 Headpiece	CC493K	B 505 UNS C93200
7 Bolts	1.4301/A2	A 194 B8
8 Elongation tube	1.4541	A 213 TP 321
9 Stem	1.4301	A 276 Grade 304
10 Gland packing	Graphite / PTFE	
11 Gland nut	CW614N	B 283 UNS C38500
12 Handwheel	Aluminium alloy	
14 Check disc	CW452K	B 159 UNS C51900
15 Spring	1.4571	A 313 Grade 316Ti
16 Cap	CC491K	B 62 UNS C83600
17 Stainless steel stubs	1.4306	A 312 TP304L

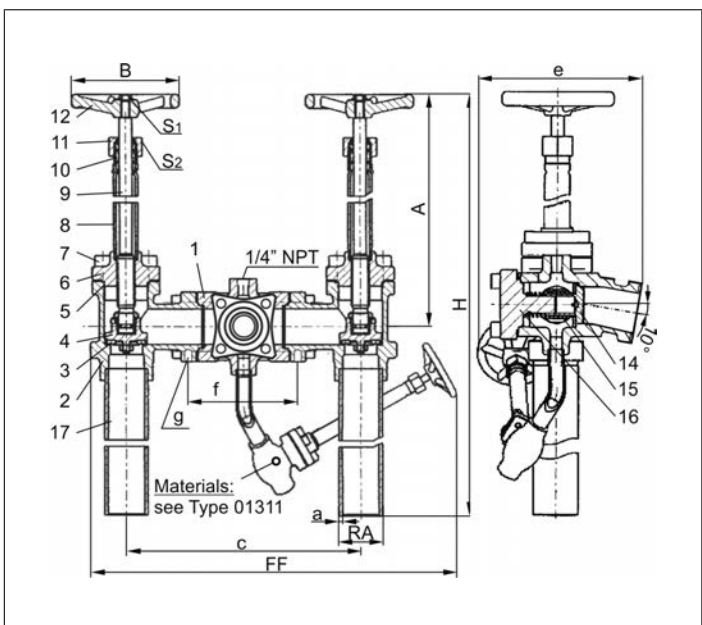

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 07004 - Standard design	Technical data		
Nominal size	DN	25	40
Dimension code	.X.	2533	4048
Face-to-face dimension	FF	340	340
Outside pipe-Ø ASTM A312	RA	33.40	48.26
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40	
Height	A	370	370
Height	H	735	735
Length	c	260	260
Length	e	235	245
Length	f	125	125
Thread	g	M10. 11 mm deep	M12. 13 mm deep
Handwheel-Ø	B	100	125
Wrench size across flats	S ₁	7	10
Wrench size across flats	S ₂	30	36
Weight	ca. kg	15.4	19.4

Dimensions in mm.

Fill Cluster

Type 07015 - Fill cluster



Cryogenic-Fill cluster, PN50


Stainless steel body and bronze topwork
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 07015.X.0000

Fill connection: Air Liquide specified flange
 Socket weld connection for stainless steel pipes
 acc. to ISO 1127 or ASTM A312

Available options - on request only:


- other fill connections
- integrable strainer

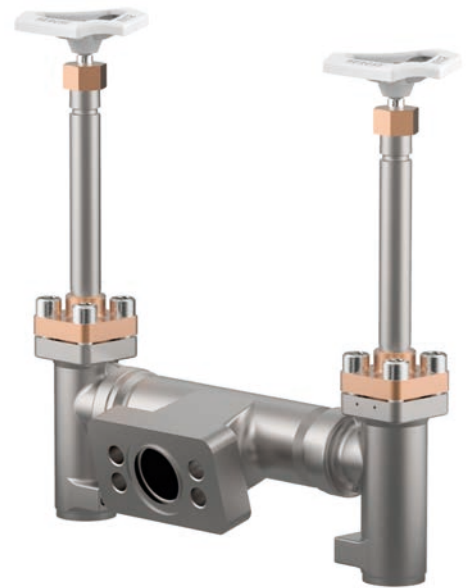

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
 Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Fill body	1.4308	A 351 CF8
2 Body	1.4308	A 351 CF8
3 Valve seal	PTFE / Carbon filled (25%)	
4 Disc	CW614N	B 283 UNS C38500
5 Bonnet gasket	PTFE	
6 Headpiece	CC493K	B 505 UNS C93200
7 Bolts	1.4301/A2	A 194 B8
8 Elongation tube	1.4541	A 213 TP 321
9 Stem	1.4301	A 276 Grade 304
10 Gland packing	Graphite / PTFE	
11 Gland nut	CW614N	B 283 UNS C38500
12 Handwheel	Aluminium alloy	

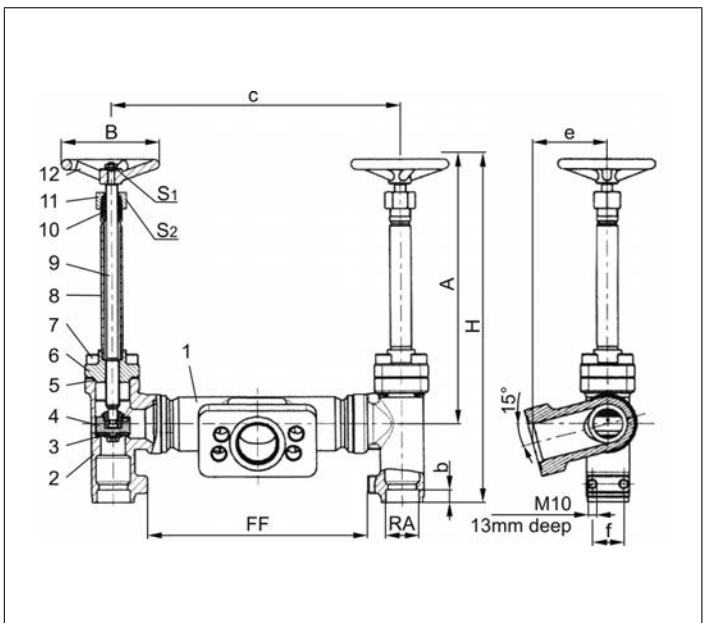

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 07015 - Standard design	Technical data		
Nominal size	DN	25	40
Dimension code	.X.	2533	4048
Face-to-face dimension	FF	225	225
Outside pipe-Ø ISO 1127	RA	33.7	48.3
Outside pipe-Ø ASTM A312	RA	33.40	48.26
Socket depth	b	13	13
Height	A	270	270
Height	H	350	350
Length	c	295	301
Length	e	76	76
Length	f	32	32
Handwheel-Ø	B	100	125
Wrench size across flats	S ₁	7	10
Wrench size across flats	S ₂	30	36
Weight	ca. kg	8.4	11.2

Dimensions in mm.

Fill Cluster

Type 07015 - Fill cluster with check function



Cryogenic-Fill cluster, PN50

Stainless steel body and bronze topwork
with check function and drain valve
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 07015.X.5000

Fill connection: Air Liquide specified flange
Socket weld connection for stainless steel pipes
acc. to ISO 1127 or ASTM A312
Non-return unit metal to metal seated, leakage rate D acc. to EN12266-1

Available options - on request only:


- other fill connections
- integrable strainer



Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Fill body	1.4308	A 351 CF8
2 Body	1.4308	A 351 CF8
3 Valve seal	PTFE / Carbon filled (25%)	
4 Disc	CW614N	B 283 UNS C38500
5 Bonnet gasket	PTFE	
6 Headpiece	CC493K	B 505 UNS C93200
7 Bolts	1.4301/A2	A 194 B8
8 Elongation tube	1.4541	A 213 TP 321
9 Stem	1.4301	A 276 Grade 304
10 Gland packing	Graphite / PTFE	
11 Gland nut	CW614N	B 283 UNS C38500
12 Handwheel	Aluminium alloy	
14 Check disc	CW452K	B 159 UNS C51900
15 Spring	1.4571	A 313 Grade 316Ti
16 Cap	CC493K	B 505 UNS C93200

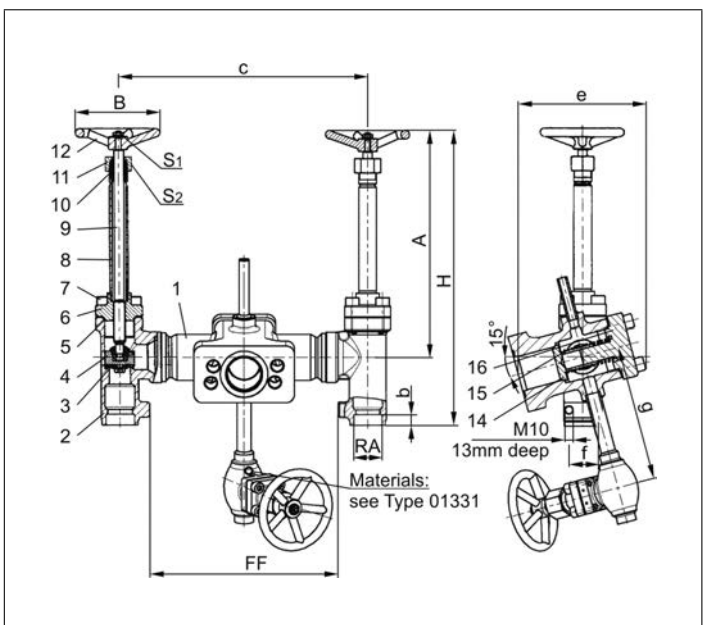

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 07015 - Standard design	Technical data		
Nominal size	DN	25	40
Dimension code	.X.	2533	4048
Face-to-face dimension	FF	225	225
Outside pipe-Ø ISO 1127	RA	33.7	48.3
Outside pipe-Ø ASTM A312	RA	33.40	48.26
Socket depth	b	13	13
Height	A	270	270
Height	H	350	350
Length	c	295	301
Length	e	76	76
Length	f	32	32
Length	g	160	160
Handwheel-Ø	B	100	125
Wrench size across flats	S ₁	7	10
Wrench size across flats	S ₂	30	36
Weight	ca. kg	11.2	14.0

Dimensions in mm.

Fill Cluster

Type 07012 - Fill cluster with check function



Cryogenic-Fill cluster, PN40


Stainless steel body and bronze topwork
with check function and drain valve
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 07012.X.5000

Fill connection: Flange DN40 acc. to DIN EN 1092-1 PN40
Socket weld connection for stainless steel pipes
acc. to ISO 1127 or ASTM A312
Non-return unit metal to metal seated, leakage rate D acc. to EN12266-1

Available options - on request only:


- other fill connections
- integrable strainer

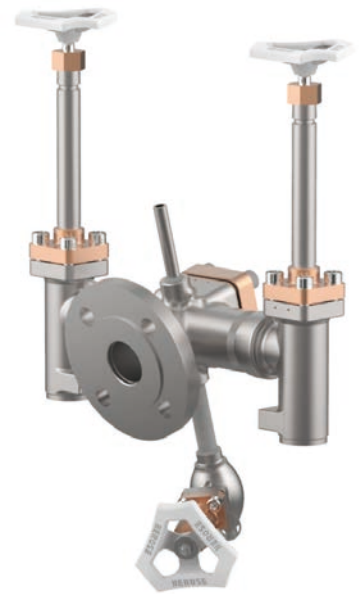

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Fill body	1.4308	A 351 CF8
2 Body	1.4308	A 351 CF8
3 Valve seal	PTFE / Carbon filled (25%)	
4 Disc	CW614N	B 283 UNS C38500
5 Bonnet gasket	PTFE	
6 Headpiece	CC493K	B 505 UNS C93200
7 Bolts	1.4301/A2	A 194 B8
8 Elongation tube	1.4541	A 213 TP 321
9 Stem	1.4301	A 276 Grade 304
10 Gland packing	Graphite / PTFE	
11 Gland nut	CW614N	B 283 UNS C38500
12 Handwheel	Aluminium alloy	
14 Check disc	CW452K	B 159 UNS C51900
15 Spring	1.4571	A 313 Grade 316Ti
16 Cap	CC493K	B 505 UNS C93200

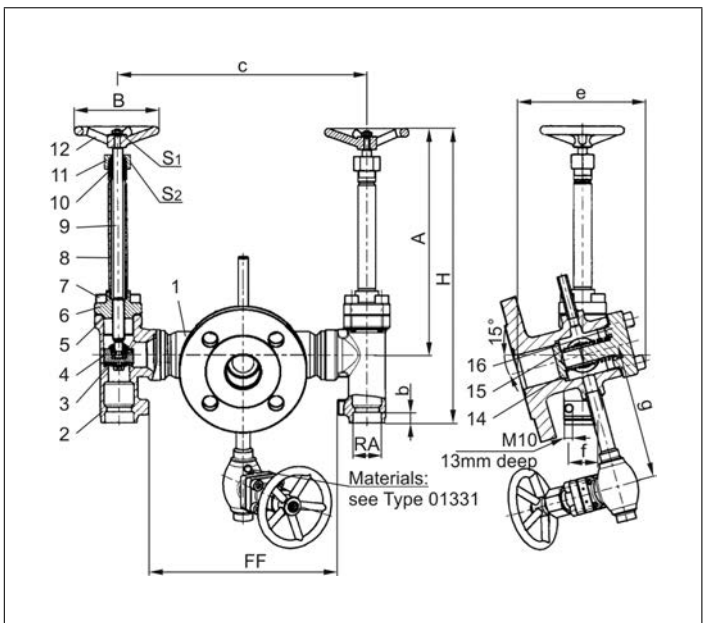

Standard marking acc. to Pressure Equipment
Directive 2014/68/EU (PED).



Type 07012 - Standard design	Technical data		
Nominal size	DN	25	40
Dimension code	.X.	2533	4048
Face-to-face dimension	FF	225	225
Outside pipe-Ø ISO 1127	RA	33.7	48.3
Outside pipe-Ø ASTM A312	RA	33.40	48.26
Socket depth	b	13	13
Height	A	270	270
Height	H	350	350
Length	c	295	301
Length	e	76	76
Length	f	32	32
Length	g	160	160
Handwheel-Ø	B	100	125
Wrench size across flats	S ₁	7	10
Wrench size across flats	S ₂	30	36
Weight	ca. kg	12.6	15.4

Dimensions in mm.

Fill Cluster

Type 07017 - Fill cluster



Cryogenic-Fill cluster, PN50


Stainless steel body and topwork
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 07017.X.0000

Fill connection: Air Liquide specified flange
 Socket weld connection for stainless steel pipes
 acc. to ISO 1127 or ASTM A312

Available options - on request only:


- other fill connections
- integrable strainer

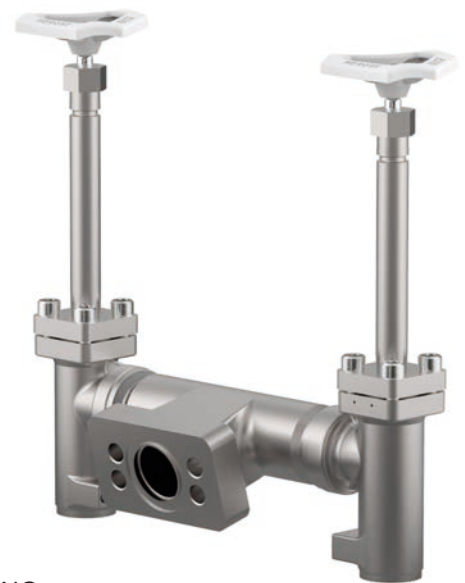

Applications:

Applications: Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
 Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Fill body	1.4308	A 351 CF8
2 Body	1.4308	A 351 CF8
3 Valve seal	PTFE / Carbon filled (25%)	
4 Disc	1.4301	A 276 Grade 304
5 Bonnet gasket	PTFE	
6 Headpiece	1.4308	A 351 CF8
7 Bolts	1.4301/A2	A 194 B8
8 Elongation tube	1.4541	A 213 TP 321
9 Stem	1.4301	A 276 Grade 304
10 Gland packing	Graphite / PTFE	
11 Gland nut	1.4305	A 276 Grade 303
12 Handwheel	Aluminium alloy	
13 Bush	CW452K	B 159 UNS C51900

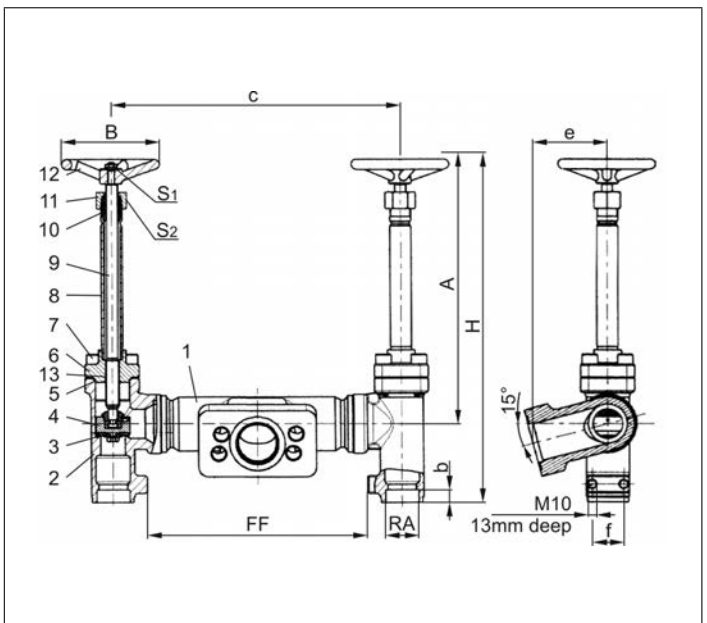

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 07017 - Standard design	Technical data		
Nominal size	DN	25	40
Dimension code	.X.	2533	4048
Face-to-face dimension	FF	225	225
Outside pipe-Ø ISO 1127	RA	33.7	48.3
Outside pipe-Ø ASTM A312	RA	33.40	48.26
Socket depth	b	13	13
Height	A	270	270
Height	H	350	350
Length	c	295	301
Length	e	76	76
Length	f	32	32
Handwheel-Ø	B	100	125
Wrench size across flats	S ₁	7	10
Wrench size across flats	S ₂	30	36
Weight	ca. kg	8.4	11.2

Dimensions in mm.

Fill Cluster

Type 07017 - Fill cluster with check function



Cryogenic-Fill cluster, PN50

Stainless steel body and topwork
with check function and drain valve
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 07017.X.5000

Fill connection: Air Liquide specified flange
Socket weld connection for stainless steel pipes
acc. to ISO 1127 or ASTM A312
Non-return unit metal to metal seated, leakage rate D acc. to EN12266-1

Available options - on request only:


- other fill connections
- integrable strainer



Applications:

Applications: Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Fill body	1.4308	A 351 CF8
2 Body	1.4308	A 351 CF8
3 Valve seal	PTFE / Carbon filled (25%)	
4 Disc	1.4301	A 276 Grade 304
5 Bonnet gasket	PTFE	
6 Headpiece	1.4308	A 351 CF8
7 Bolts	1.4301/A2	A 194 B8
8 Elongation tube	1.4541	A 213 TP 321
9 Stem	1.4301	A 276 Grade 304
10 Gland packing	Graphite / PTFE	
11 Gland nut	1.4305	A 276 Grade 303
12 Handwheel	Aluminium alloy	
13 Bush	CW452K	B 159 UNS C51900
14 Check disc	1.4301	A 276 Grade 304
15 Spring	1.4571	A 313 Grade 316Ti
16 Cap	1.4301	A 276 Grade 304

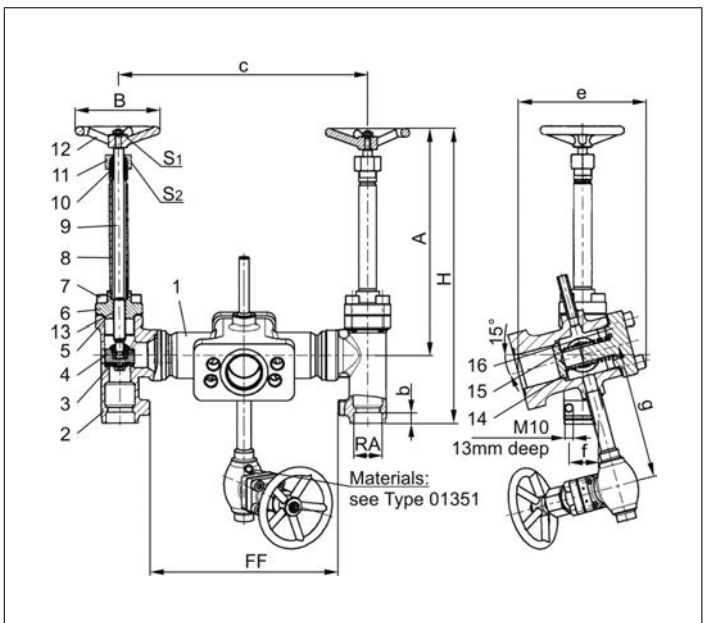

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 07017 - Standard design	Technical data		
Nominal size	DN	25	40
Dimension code	.X.	2533	4048
Face-to-face dimension	FF	225	225
Outside pipe-Ø ISO 1127	RA	33.7	48.3
Outside pipe-Ø ASTM A312	RA	33.40	48.26
Socket depth	b	13	13
Height	A	270	270
Height	H	350	350
Length	c	295	301
Length	e	76	76
Length	f	32	32
Length	g	160	160
Handwheel-Ø	B	100	125
Wrench size across flats	S ₁	7	10
Wrench size across flats	S ₂	30	36
Weight	ca. kg	11.2	14.0

Dimensions in mm.

Flow rates of the Fill Cluster

Typ 070XX - Standard design	Technical data		
Nominal size	DN	25	40
Kvs-Value both-sided open	m ³ /h	36.5	60.0
Kvs-Value one-sided open	m ³ /h	18.0	33.0
Kvs-Value both-sided open with check function	m ³ /h	32.5	50.5
Kvs-Value one-sided open with check function	m ³ /h	17.0	29.0
Kvs-Value both-sided open with screen	m ³ /h	27.0	37.0
Kvs-Value one-sided open with screen	m ³ /h	13.5	18.5
Kvs-Value both-sided open with check function and screen	m ³ /h	21.0	27.0
Kvs-Value one-sided open with check function and screen	m ³ /h	12.5	15.5
Cv-Value both-sided open	gal/min	42.0	69.5
Cv-Value one-sided open	gal/min	21.0	38.5
Cv-Value both-sided open with check function	gal/min	38.0	58.5
Cv-Value one-sided open with check function	gal/min	20.0	33.5
Cv-Value both-sided open with screen	gal/min	31.0	43.0
Cv-Value one-sided open with screen	gal/min	15.5	21.5
Cv-Value both-sided open with check function and screen	gal/min	24.0	31.0
Cv-Value one-sided open with check function and screen	gal/min	14.5	18.0

Spare Parts for Valves and Fill Cluster

Type 28203 - Disc complete



for Cryogenic-Globe Valves


brass disc CW614N

"cleaned and degreased for oxygen service"

Part No. 28203.X.0000

suitable for:

Type	Nominal size
01301, 01311	DN10 - DN50
01305, 01315, 02401, 02411	DN10 - DN50
01331	DN10 - DN100
01321	DN10 - DN150
01332, 01322	DN10 - DN50
01335, 01325	DN10 - DN50
03331, 03321	DN25 - DN150



Type 28203.X.0000	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Disc Ø	L	23	25	30	34.5	42	47	55	73	86	104	155
Weight	ca. kg	0.05	0.06	0.09	0.12	0.18	0.22	0.30	0.55	0.75	1.05	3.10

Dimensions in mm.

for Cryogenic-Globe Valves

stainless steel disc 1.4301

"cleaned and degreased for oxygen service"

Part No. 28203.X.0765


suitable for:

Type	Nominal size
01351	DN10 - DN100
01341	DN10 - DN200
01352, 01342	DN15 - DN50
01355, 01345	DN10 - DN50
03351, 03341	DN25 - DN150
01353	DN15 - DN80
01420	DN15 - DN100
01423	DN25 - DN100

Part No. 28203.X.A76*

suitable for:

Type	Nominal size
01420	DN10
01423	DN10 - DN20



Type 28203.X.*76*	Technical data												
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150	200
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500	2000
Disc Ø	L	23	25	30	34.5	42	47	55	73	86	104	155	217
Weight	ca. kg	0.05	0.06	0.09	0.12	0.18	0.22	0.30	0.55	0.75	1.05	3.10	9.28

Dimensions in mm.

Spare Parts for Valves and Fill Cluster

Type 28203, Type 28205 - Check Disc complete



for Cryogenic-Globe/Check Valves


brass check disc CW614N

"cleaned and degreased for oxygen service"

Part No. 28203.X.5000

suitable for:

Type	Nominal size
01301, 01311	DN10 - DN50
01305, 01315, 02401, 02411	DN10 - DN50
01331	DN10 - DN100
01321	DN10 - DN150
01332, 01322, 01335, 01325	DN10 - DN50
03331, 03321	DN25 - DN150



Type 28203.X.5000	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Disc Ø	L	23	25	30	34.5	42	47	55	73	86	104	155
Weight	ca. kg	0.05	0.07	0.09	0.10	0.15	0.20	0.34	0.48	0.66	1.05	3.28

Dimensions in mm.

for Cryogenic-Globe/Check Valves


stainless steel check disc 1.4301

"cleaned and degreased for oxygen service"

Part No. 28205.X.5000

suitable for:

Type	Nominal size
01351	DN10 - DN100
01341	DN10 - DN150
01352, 01342	DN15 - DN50
01355, 01345	DN10 - DN50
03351, 03341	DN25 - DN150



Type 28205.X.5000	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Disc Ø	L	23	25	30	34.5	42	47	55	73	86	104	155
Weight	ca. kg	0.05	0.07	0.09	0.10	0.15	0.20	0.34	0.48	0.66	1.05	3.28

Dimensions in mm.

Spare Parts for Valves and Fill Cluster

Type 29240 - Disc complete



for Cryogenic-Gate Valves

brass disc CW452K

"cleaned and degreased for oxygen service"

Part No. 29240.X.0000

consisting of:


1 x Disc complete (incl. disc seal PTFE/Carbon filled (25%))

1 x Spring ring


1 x Disc nut self locking

suitable for:

Type	Nominal size
09340, 09343	DN25 - DN100
09345, 09440, 09443	DN25 - DN65

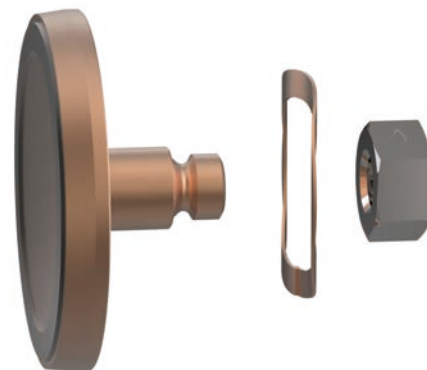

Materials	DIN EN	ASTM
1 Disc	CW614N	B 283 UNS C38500
2 Spring ring	1.4568	UNS 631
3 Nut	1.4301/A2 A 194 B8	
4 Valve seal	PTFE / Carbon filled (25%)	

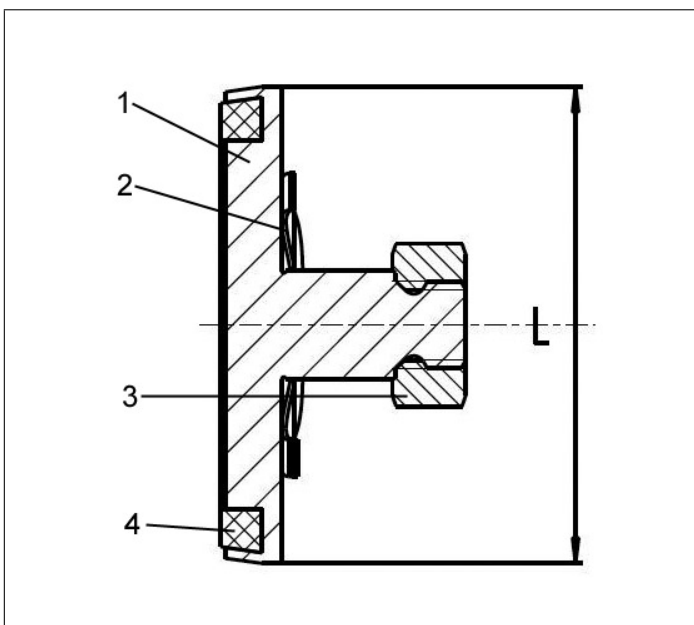

Type 29240	Technical data						
Nominal size	DN	25	40	50	65	80	100
Dimension code	.X.	0250	0400	0500	0650	0800	1000
Disc-Ø	L	34	44	55	70	78	107
Weight	ca. kg	0.05	0.08	0.15	0.18	0.20	0.56

Dimensions in mm.

Spare Parts for Valves and Fill Cluster

Type 29256 - Wedge complete



for Cryogenic-Gate Valves

"cleaned and degreased for oxygen service"

Part No. 29256.X.0000

consisting of:


- 1 x Wedge
- 1 x Disc complete (incl. disc seal PTFE/Carbon filled (25%))
- 1 x Spring ring
- 1 x Disc nut self locking
- 1 x bearing bolt

suitable for:

Type	Nominal size
09340, 09343	DN25 - DN100
09345, 09440, 09443	DN25 - DN65



Materials	DIN EN	ASTM
1 Wedge	1.4308	A 351 CF8
2 Disc	CW452K	B 159 UNS C51900
3 Spring ring	1.4568	UNS 631
4 Nut	1.4301/A2	A 194 B8
5 Valve seal	PTFE / Carbon filled (25%)	
6 Bearing bolt	1.4301	A 276 Grade 304

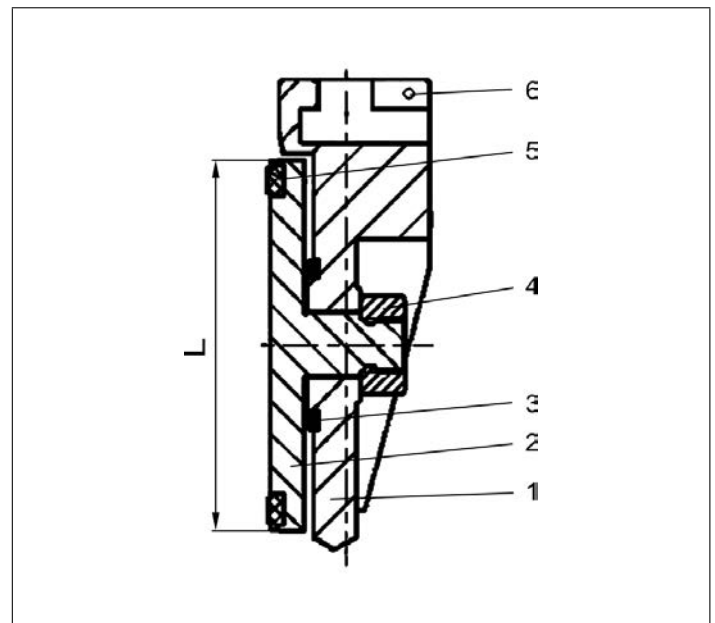

Type 29256	Technical data						
Nominal size	DN	25	40	50	65	80	100
Dimension code	.X.	0250	0400	0500	0650	0800	1000
Disc-Ø	L	34	45	55	70	78	108
Weight	ca. kg	0.21	0.33	0.57	0.74	1.06	2.13

Dimensions in mm.

Spare Parts for Valves and Fill Cluster

Type 28301 - Topwork



for Cryogenic-Globe and Globe/Check Valves

Bronze topwork

"live loaded" gland packing


"cleaned and degreased for oxygen service"

Part No. 28301.X.0000


Part No. 28301.X.5000 with check function

suitable for:

Type	Nominal size
01301, 01305, 02401	DN10 - DN50
01331	DN10 - DN100
01335	DN10 - DN50
03331	DN25 - DN150

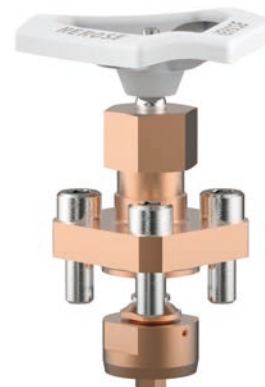

Materials	DIN EN	ASTM
1 Valve seal	PTFE / Carbon filled (25%)	
2 Disc	CW614N B 283 UNS C38500	
3 Bonnet gasket	PTFE	
4 Headpiece	CC493K B 505 UNS C93200	
5 Bolts	1.4301/A2 A 194 B8	
6 Stem	1.4301 A 276 Grade 304	
7 Gland packing	Graphite / PTFE	
8 Gland nut	CW614N B 283 UNS C38500	
9 Handwheel	Aluminium alloy	
10 Spring	CW452K B 159 UNS C51900	

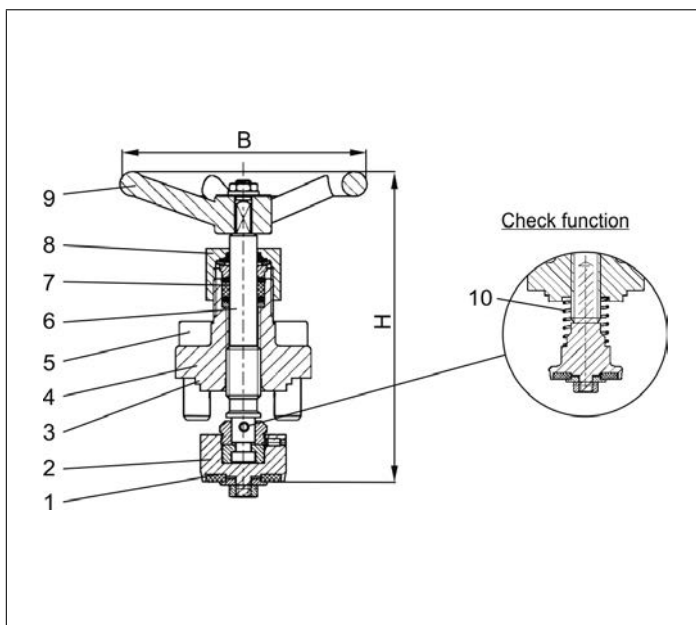

Type 28301	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Height	H	130	130	130	130	155	160	185	240	285	320	380
Number of bolts		4	4	4	4	4	4	6	6	6	6	12
Handwheel-Ø	B	100	100	100	100	125	125	125	200	250	315	360
Weight	ca. kg	0.6	0.7	0.95	1.0	1.5	1.9	2.7	4.8	5.9	8.4	18.0

Dimensions in mm.

Spare Parts for Valves and Fill Cluster

Type 28351 - Topwork



for Cryogenic-Globe and Globe/Check Valves

Stainless steel topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 28351.X.0000


Part No. 28351.X.5000 with check function

suitable for:

Type	Nominal size
01351	DN10 - DN100
01355	DN10 - DN50
03351	DN25 - DN150



Materials	DIN EN	ASTM
1 Valve seal	PTFE / Carbon filled (25%)	
2 Disc	1.4301	A 276 Grade 304
3 Bonnet gasket	PTFE	
4 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
5 Bolts	1.4301/A2	A 194 B8
6 Stem	1.4301	A 276 Grade 304
7 Gland packing	Graphite / PTFE	
8 Gland nut	1.4305	A 276 Grade 303
9 Handwheel	Aluminium alloy	
10 Spring	1.4310	A 313 Grade 301
11 Bush	CW452K	B 159 UNS C51900

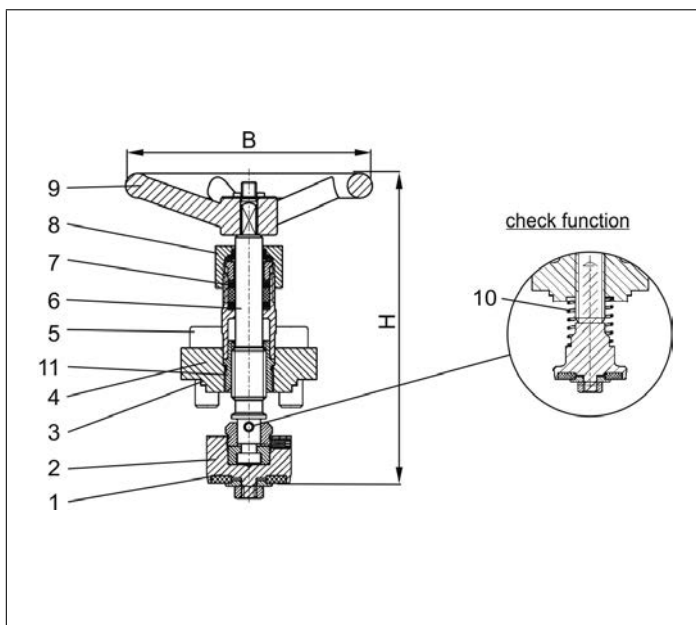

Type 28351	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Height	H	130	130	130	130	155	160	185	240	285	320	380
Number of bolts		4	4	4	4	4	4	6	6	6	6	12
Handwheel-Ø	B	100	100	100	100	125	125	125	200	250	315	360
Weight	ca. kg	0.6	0.7	0.95	1.0	1.5	1.9	2.7	4.8	5.9	8.4	18.0

Dimensions in mm.

Spare Parts for Valves and Fill Cluster

Type 28311 - Topwork



for Cryogenic-Globe and Globe/Check Valves

Bronze topwork

"live loaded" gland packing

"cleaned and degreased for oxygen service"

Part No. 28311.X.0010 (H=270mm)

Part No. 28311.X.0020 (H=370mm)


Part No. 28311.X.5010 (H=270mm) with check function

Part No. 28311.X.5020 (H=370mm) with check function

suitable for:

Type	Nominal size
01311, 01315, 02411	DN10 - DN50
01321	DN10 - DN150
01325	DN10 - DN50
03321	DN25 - DN150
07003 - only drain valve	DN15
07004 - only drain valve	DN15

Materials	DIN EN	ASTM
1 Valve seal	PTFE / Carbon filled (25%)	
2 Disc	CW614N B 283 UNS C38500	
3 Bonnet gasket	PTFE	
4 Headpiece	CC493K B 505 UNS C93200	
5 Bolts	1.4301/A2 A 194 B8	
6 Elongation tube	1.4541 A 213 TP 321	
7 Stem	1.4301 A 276 Grade 304	
8 Gland packing	Graphite / PTFE	
9 Gland nut	CW614N B 283 UNS C38500	
10 Handwheel	Aluminium alloy	
11 Spring	CW452K B 159 UNS C51900	

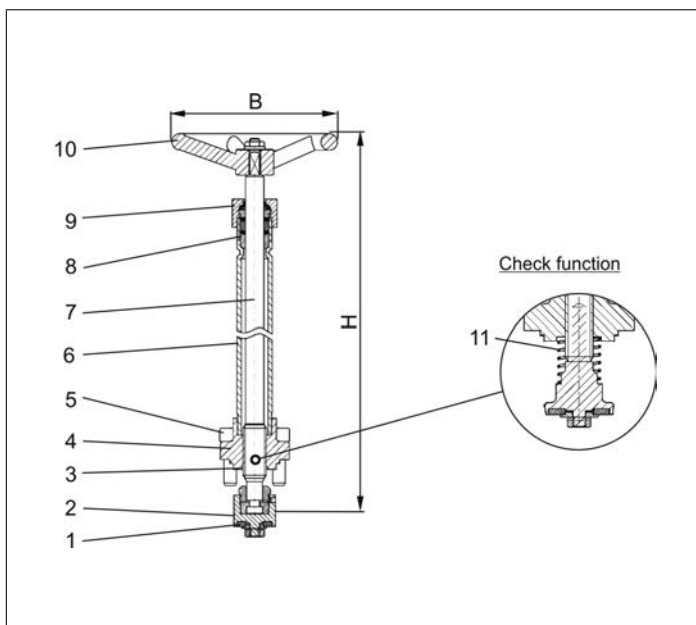

Type 28311	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Height	H	270 mm or 370 mm							370	370	370	420
Number of bolts		4	4	4	4	4	4	6	6	6	6	6
Handwheel-Ø	B	100	100	100	100	125	125	125	200	250	315	350
Weight	ca. kg	1.0	1.1	1.4	1.4	2.0	2.4	3.0	5.5	6.8	9.5	18.4

Dimensions in mm.

Spare Parts for Valves and Fill Cluster

Type 28341 - Topwork



for Cryogenic-Globe and Globe/Check Valves

Stainless steel topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 28341.X.0010 (H=270mm)

Part No. 28341.X.0020 (H=370mm)

Part No. 28341.X.5010 (H=270mm) with check function


Part No. 28341.X.5020 (H=370mm) with check function

suitable for:

Type	Nominal size
01341	DN10 - DN200
01345	DN10 - DN50
03341	DN25 - DN150



Materials	DIN EN	ASTM
1 Valve seal	PTFE / Carbon filled (25%)	
2 Disc	1.4301	A 276 Grade 304
3 Bonnet gasket	PTFE	
4 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
5 Bolts	1.4301/A2	A 194 B8
6 Elongation tube	1.4541	A 213 TP 321
7 Stem	1.4301	A 276 Grade 304
8 Gland packing	Graphite / PTFE	
9 Gland nut	1.4305	A 276 Grade 303
10 Handwheel	Aluminium alloy	
11 Spring	1.4310	A 313 Grade 301
12 Bush	CW452K	B 159 UNS C51900

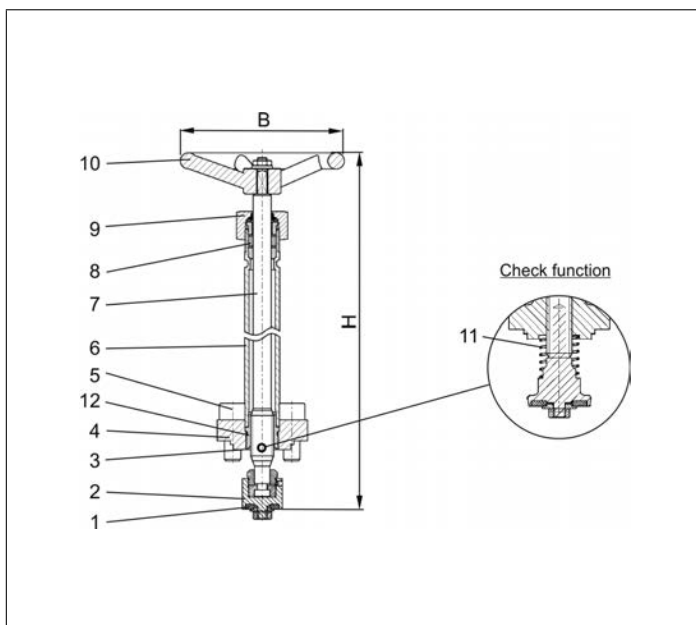

Type 28341	Technical data												
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150	200
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500	2000
Height	H	270 mm or 370 mm							370	370	370	420	560
Number of bolts		4	4	4	4	4	4	6	6	6	6	6	12
Handwheel-Ø	B	100	100	100	100	125	125	125	200	250	315	350	630
Weight	ca. kg	1.0	1.1	1.4	1.4	2.0	2.4	3.0	5.5	6.8	9.5	18.4	56.8

Dimensions in mm.

Spare Parts for Valves and Fill Cluster

Type 28302 - Topwork Angle Type




for Cryogenic-Globe Valves Angle Type

Bronze topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"


Part No. 28302.X.0000

suitable for:

Type	Nominal size
01332	DN15 - DN50

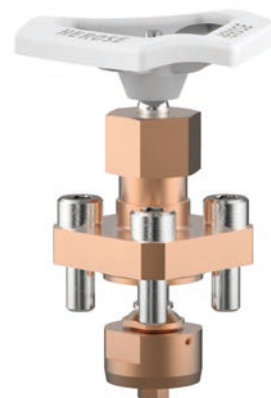

Materials	DIN EN	ASTM
1 Valve seal	PTFE / Carbon filled (25%)	
2 Disc	CW614N B 283 UNS C38500	
3 Bonnet gasket	PTFE	
4 Headpiece	CC493K B 505 UNS C93200	
5 Bolts	1.4301/A2 A 194 B8	
6 Stem	1.4301 A 276 Grade 304	
7 Gland packing	Graphite / PTFE	
8 Gland nut	CW614N B 283 UNS C38500	
9 Handwheel	Aluminium alloy	

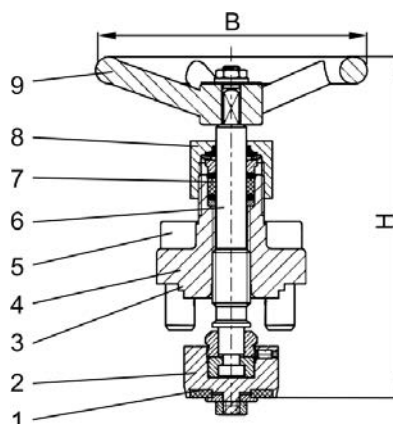

Type 28302	Technical data							in preparation	
Nominal size	DN	15	20	25	32	40	50	80	100
Dimension code	.X.	0150	0200	0250	0320	0400	0500	-	-
Height	H	130	130	130	155	160	185	-	-
Number of bolts		4	4	4	4	4	6	-	-
Handwheel-Ø	B	100	100	100	125	125	125	-	-
Weight	ca. kg	0.7	0.95	1.0	1.5	1.9	2.7	-	-

Dimensions in mm.

Spare Parts for Valves and Fill Cluster

Type 28352 - Topwork Angle Type



for Cryogenic-Globe Valves Angle Type

Stainless steel topwork,
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"


Part No. 28352.X.0000

suitable for:

Type	Nominal size
01352	DN15 - DN50



Materials	DIN EN	ASTM
1 Valve seal	PTFE / Carbon filled (25%)	
2 Disc	1.4301	A 276 Grade 304
3 Bonnet gasket	PTFE	
4 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
5 Bolts	1.4301/A2	A 194 B8
6 Stem	1.4301	A 276 Grade 304
7 Gland packing	Graphite / PTFE	
8 Gland nut	1.4305	A 276 Grade 303
9 Handwheel	Aluminium alloy	
10 Bush	CW452K	B 159 UNS C51900

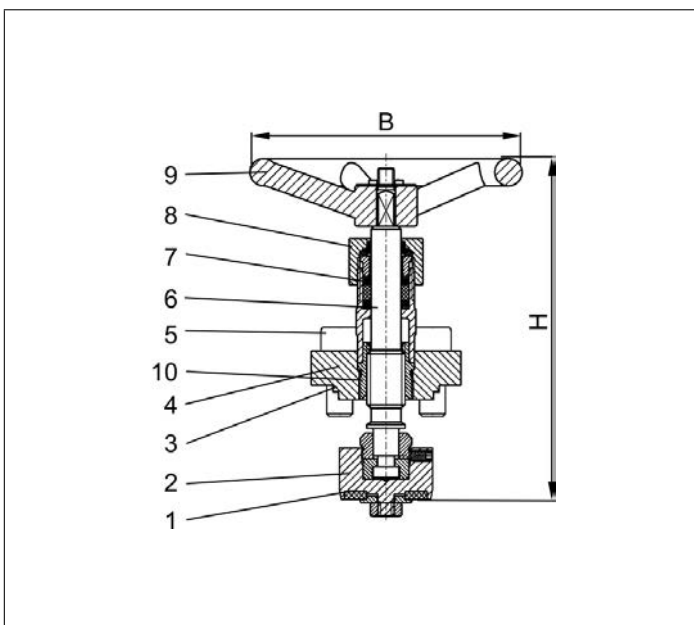

Type 28352	Technical data							in preparation	
Nominal size	DN	15	20	25	32	40	50	80	100
Dimension code	.X.	0150	0200	0250	0320	0400	0500	-	-
Height	H	130	130	130	155	160	185	-	-
Number of bolts		4	4	4	4	4	6	-	-
Handwheel-Ø	B	100	100	100	125	125	125	-	-
Weight	ca. kg	0.7	0.95	1.0	1.5	1.9	2.7	-	-

Dimensions in mm.

Spare Parts for Valves and Fill Cluster

Type 28312 - Topwork Angle Type



for Cryogenic-Globe Valves Angle Type

Bronze topwork

"live loaded" gland packing

"cleaned and degreased for oxygen service"

Part No. 28312.X.0010 (H=270mm)

Part No. 28312.X.0020 (H=370mm)

Part No. 28312.X.5010 (H=270mm) with check function


Part No. 28312.X.5020 (H=370mm) with check function

suitable for:

Type	Nominal size
01322	DN15 - DN50
07003 - only angled valves	DN25 & DN40
07004 - only angled valves	DN25 & DN40
07015 - only angled valves	DN25 & DN40



Materials	DIN EN	ASTM
1 Valve seal	PTFE / Carbon filled (25%)	
2 Disc	CW614N B 283 UNS C38500	
3 Bonnet gasket	PTFE	
4 Headpiece	CC493K B 505 UNS C93200	
5 Bolts	1.4301/A2 A 194 B8	
6 Elongation tube	1.4541 A 213 TP 321	
7 Stem	1.4301 A 276 Grade 304	
8 Gland packing	Graphite / PTFE	
9 Gland nut	CW614N B 283 UNS C38500	
10 Handwheel	Aluminium alloy	
11 Spring	CW452K B 159 UNS C51900	

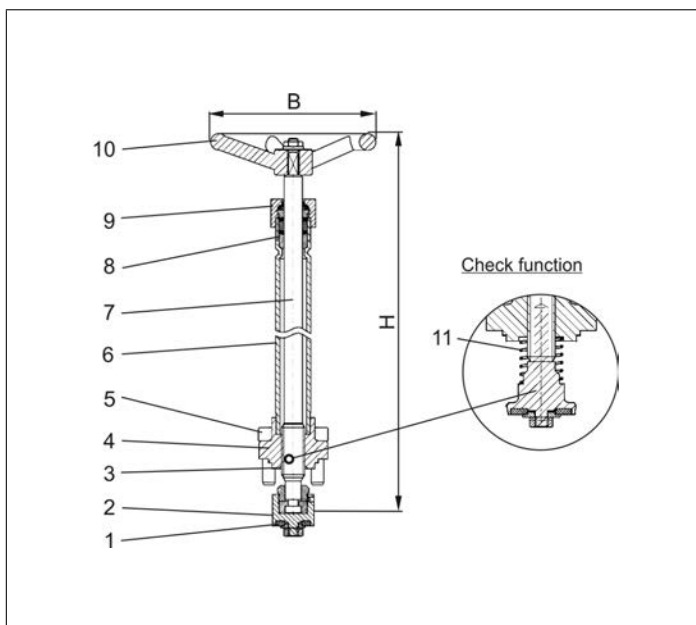

Type 28312	Technical data							in preparation	
Nominal size	DN	15	20	25	32	40	50	80	100
Dimension code	.X.	0150	0200	0250	0320	0400	0500	-	-
Height	H	270 mm or 370 mm						-	-
Number of bolts		4	4	4	4	4	6	-	-
Handwheel-Ø	B	100	100	100	125	125	125	-	-
Weight	ca. kg	1.1	1.4	1.4	2.0	2.4	3.0	-	-

Dimensions in mm.

Spare Parts for Valves and Fill Cluster

Type 28342 - Topwork Angle Type



for Cryogenic-Globe Valves Angle Type

Stainless steel topwork,
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 28342.X.0010 (H=270mm)


Part No. 28342.X.0020 (H=370mm)

suitable for:

Type	Nominal size
01342	DN15 - DN50
07017	DN25 & DN40



Materials	DIN EN	ASTM
1 Valve seal	PTFE / Carbon filled (25%)	
2 Disc	1.4301	A 276 Grade 304
3 Bonnet gasket	PTFE	
4 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
5 Bolts	1.4301/A2	A 194 B8
6 Elongation tube	1.4541	A 213 TP 321
7 Stem	1.4301	A 276 Grade 304
8 Gland packing	Graphite / PTFE	
9 Gland nut	1.4305	A 276 Grade 303
10 Handwheel	Aluminium alloy	
11 Bush	CW452K	B 159 UNS C51900

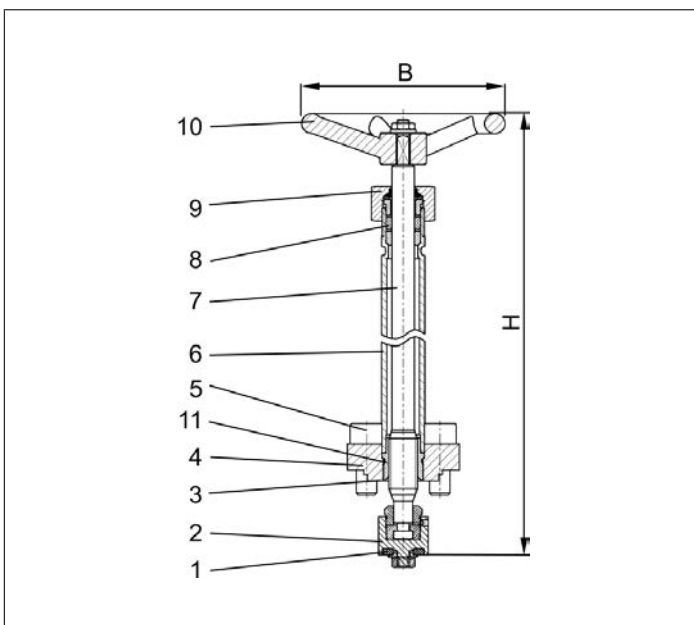

Type 28342	Technical data							in preparation	
Nominal size	DN	15	20	25	32	40	50	80	100
Dimension code	.X.	0150	0200	0250	0320	0400	0500	-	-
Height	H	270 mm or 370 mm							-
Number of bolts		4	4	4	4	4	6	-	-
Handwheel-Ø	B	100	100	100	100	125	125	-	-
Weight	ca. kg	1.1	1.4	1.4	2.0	2.4	3.0	-	-

Dimensions in mm.

Spare Parts for Valves and Fill Cluster

Type 29340 - Topwork



for Cryogenic-Gate Valves

Stainless steel topwork,
one way tightening (in flow direction),
"live loaded " gland packing
"cleaned and degreased for oxygen service "

Part No. 29340.0400.0010 (DN40)


Part No. 29340.X.0020

suitable for:

Type	Nominal size
09340	DN25 - DN100



Materials	DIN EN	ASTM
1 Valve seal	PTFE / Carbon filled (25%)	
2 Disc	CW452K B 159 UNS C51900	
3 Wedge	1.4308 A 351 CF8	
4 Stem	1.4301 A 276 Grade 304	
5 Bonnet gasket	PTFE	
6 Headpiece	1.4308 A 351 CF8	
7 Bolts	1.4301/A2 A 194 B8	
8 Elongation tube	1.4541 A 213 TP 321	
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305 A 276 Grade 303	
11 Handwheel	Aluminium alloy	
12 Bush	CW452K B 159 UNS C51900	

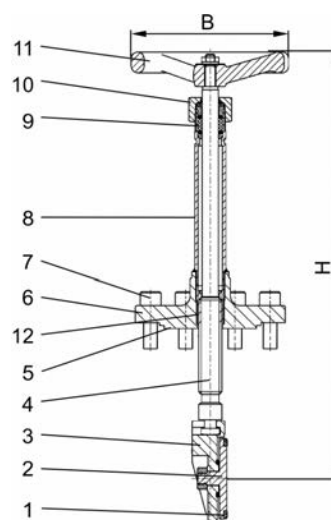

Type 29340	Technical data						
Nominal size	DN	25	40	50	65	80	100
Dimension code	.X.	0250	0400	0500	0650	0800	1000
Height	H	300/400	320/420	360	370	380	470/570
Number of bolts		4	4	6	8	6	8
Handwheel-Ø	B	125	125	150	150	150	200
Weight	ca. kg	2.0	2.3	3.6	4.2	5.5	10.4

Dimensions in mm.

Spare Parts for Valves and Fill Cluster

Type 30000 - Sealing spare part kit



for Cryogenic-Globe Valves

"cleaned and degreased for oxygen service"



Part No. 30000.X.0000

consisting of:

- 2x Bonnet gasket PTFE
- 1x Disc seal PTFE/Carbon filled (25%)
- 1x Disc nut 1.4301
- 1x Stem sealing kit complete PTFE/Graphite

suitable for:

Type	Nominal size
01301, 01311	DN10 - DN50
01305, 01315, 02401, 02411	DN10 - DN50
01321, 01331	DN10 - DN150
01332, 01322	DN10 - DN50
01335, 01325	DN10 - DN50
01353	DN15 - DN80
03331, 03321	DN25 - DN150

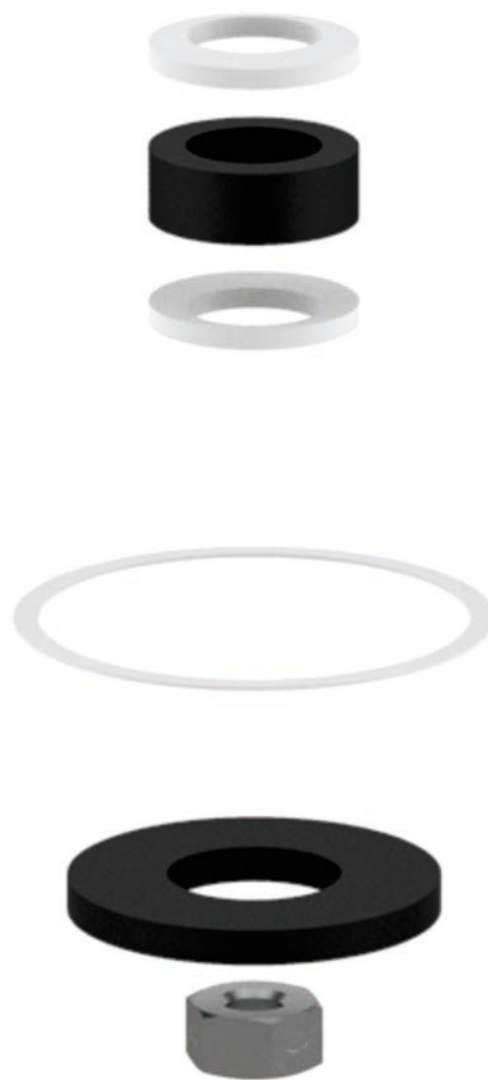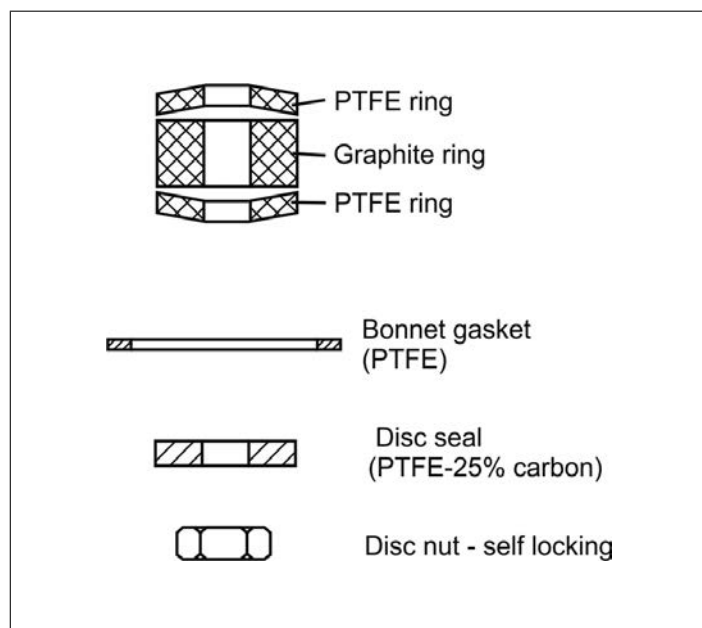

Type 30000	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Weight	ca. kg	0.03	0.03	0.04	0.05	0.07	0.08	0.12	0.17	0.23	0.31	0.35

Dimensions in mm.

Edition 2020-02

Spare Parts for Valves and Fill Cluster

Type 30290 - Sealing spare part kit



for Cryogenic-Gate Valves

"cleaned and degreased for oxygen service"



Part No. 30290.X.S000

consisting of:

- 2x Bonnet gasket PTFE
- 1x Gland packing kit complete PTFE/Graphite

suitable for:

Type	Nominal size
09340, 09345, 09440	DN25 - DN100

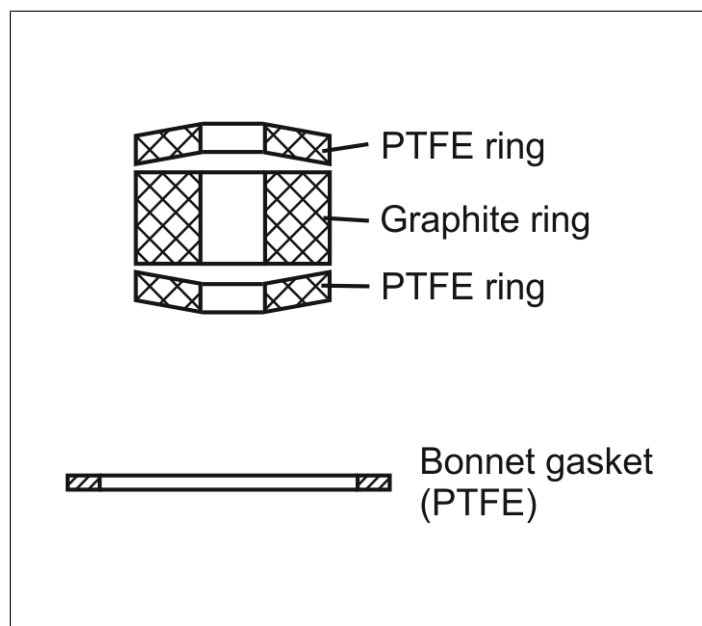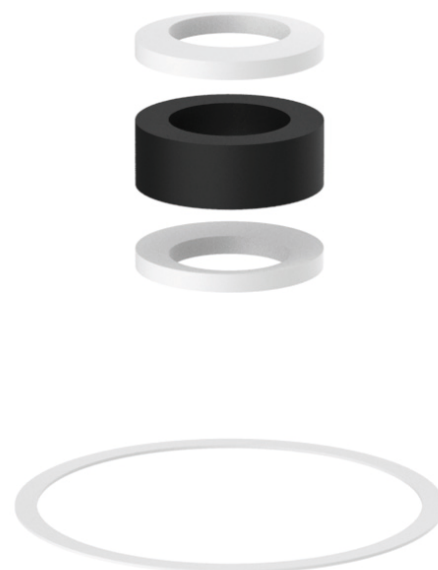

Type 30290	Technical data						
Nominal size	DN	25	40	50	65	80	100
Dimension code	.X.	0250	0400	0500	0650	0800	1000
Weight	ca. kg	0.02	0.05	0.10	0.15	0.21	0.29

Dimensions in mm.

Spare Parts for Valves and Fill Cluster

Type 30293 - Sealing spare part kit



for actuated Cryogenic-Gate Valves

"cleaned and degreased for oxygen service"



Part No. 30293.X.S000

consisting of:

- 2x Bonnet gasket PTFE
- 1x Gland packing kit complete PTFE/Graphite
- 2x Stem gasket Mica

suitable for:

Type	Nominal size
09343	DN25 - DN100
09443	DN25 - DN65

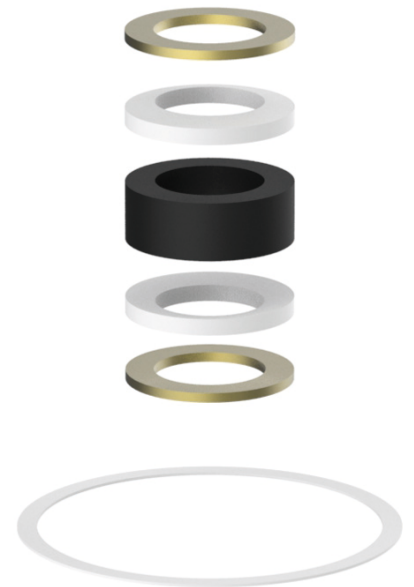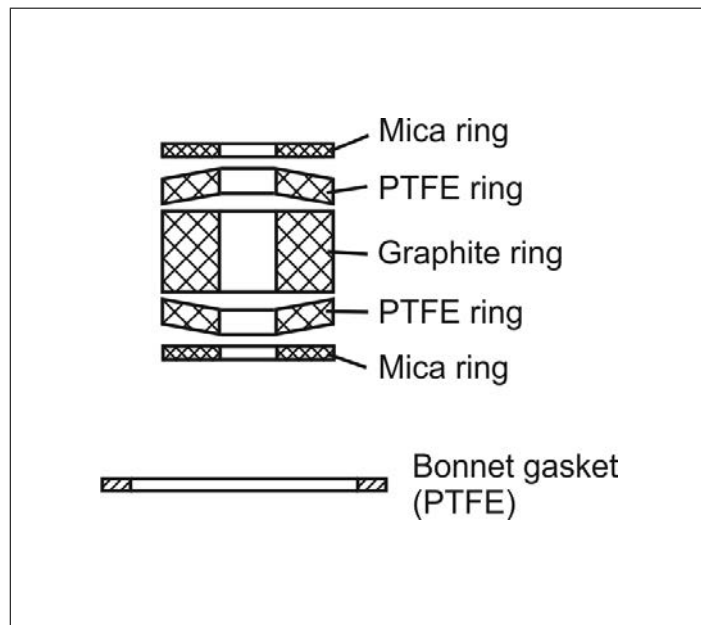

Type 30293	Technical data						
Nominal size	DN	25	40	50	65	80	100
Dimension code	.X.	0250	0400	0500	0650	0800	1000
Weight	ca. kg	0.03	0.06	0.11	0.16	0.22	0.30

Dimensions in mm.

Spare Parts for Valves and Fill Cluster

Type 30001, 30002, 30341, 30343 - Sealing spare part kit



for Cryogenic-Globe Valves

"cleaned and degreased for oxygen service"

Part No. 30001.X.0765

Part No. 30002.X.0765

Part No. 30341.X.0000

Part No. 30343.X.0000

consisting of:

- 2x Bonnet gasket PTFE
- 1x Disc seal PTFE/Carbon filled (25%)
- 1x Disc nut 1.4301
- 1x Gland packing kit complete PTFE/Graphite
- 2x Stem gasket Mica

30001.X.0765 suitable for:

Type	Nominal size
01420	DN10, DN65 - DN80
01423	DN65 - DN80

30002.X.0765 suitable for:


Type	Nominal size
01423	DN10 - DN20

30341.X.0000 suitable for:

Type	Nominal size
01341	DN10 - DN200
01342, 01352	DN15 - DN50
01343	DN10 - DN50, DN100, DN200
01345, 01355	DN10 - DN50
01351	DN10 - DN150
01420	DN15 - DN25, DN40 - DN50, DN100
01423	DN25, DN40 - DN50, DN100
03341, 03351	DN15 - DN150
03343	DN15 - DN50, DN100, DN200

30343.X.0000 suitable for:

Type	Nominal size
01343, 03343	DN65 - DN80, DN150

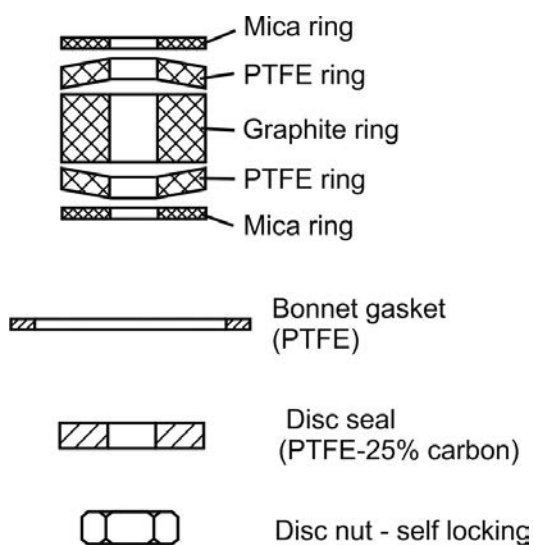

Type 30001/30002/30341/30343 Technical data													
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150	200
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500	2000
Weight	ca. kg	0.03	0.03	0.04	0.05	0.07	0.08	0.13	0.18	0.24	0.32	0.68	1.91

Dimensions in mm.

Spare Parts for Valves and Fill Cluster

Type 30353 - Sealing spare part kit



for Cryogenic-Globe Valves

"cleaned and degreased for oxygen service"



Part No. 30353.X.0000

consisting of:

- 2x Bonnet gasket PTFE
- 1x Gland packing kit complete PTFE/Graphite
- 2x Stem gasket Mica

suitable for:

Type	Nominal size
01353	DN20 - DN80

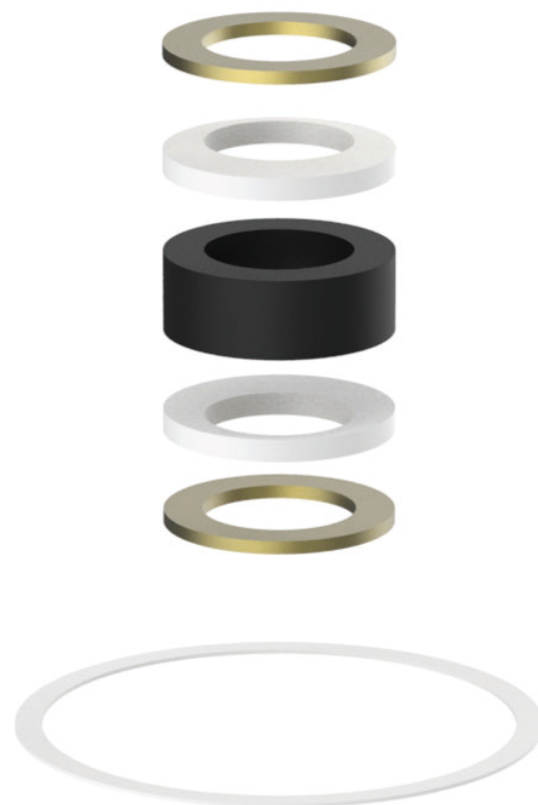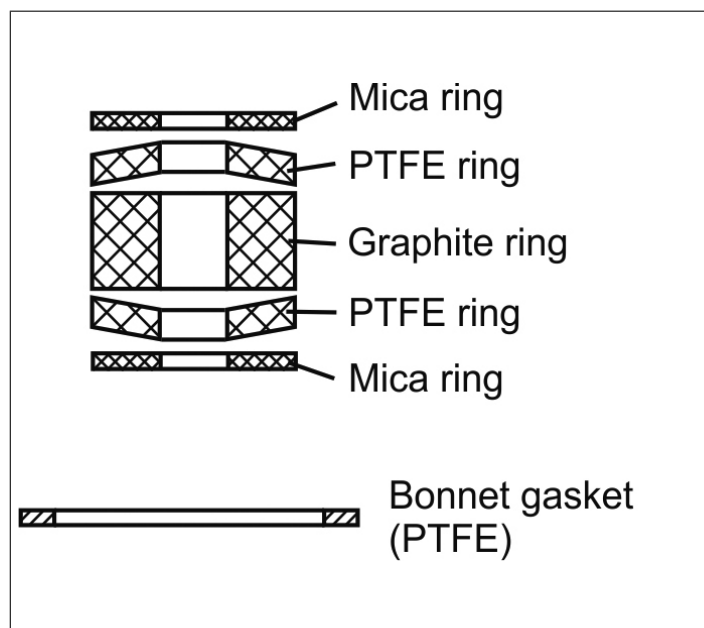

Type 30353	Technical data						
Nominal size	DN	20	25	40	50	65	80
Dimension code	.X.	0200	0250	0400	0500	0650	0800
Weight	ca. kg	0.03	0.05	0.08	0.13	0.18	0.24

Dimensions in mm.

Edition 2020-02

Spare Parts for Valves and Fill Cluster

Type 31514 - KEL-F (PCTFE) Disc sealing spare part kit



for Cryogenic Globe Valves and Check Valves

"cleaned and degreased for oxygen service"


Part No. 31514.X.PCTFE

consisting of:

- 2x Bonnet gasket PTFE
- 1x Disc seal KEL-F (PCTFE)
- 1x Disc nut 1.4301

suitable for:

Type	Nominal size
01301, 01311	DN10 - DN50
01305, 01315, 02401, 02411	DN10 - DN50
01331	DN10 - DN100
01321	DN10 - DN100
01332, 01322	DN10 - DN50
01335, 01325	DN10 - DN50
03331, 03321	DN25 - DN150
01351	DN10 - DN100
01341	DN10 - DN150
01352, 01342	DN15 - DN50
01355, 01345	DN10 - DN50
03351, 03341	DN25 - DN150

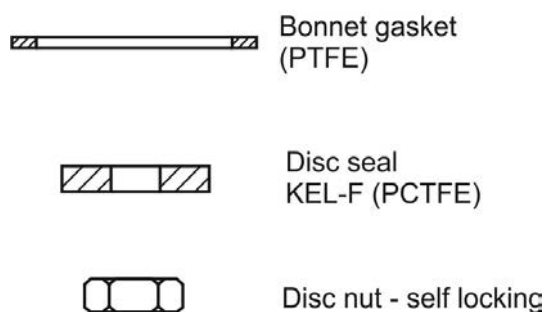

Type 31514	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Weight	ca. kg	0.02	0.02	0.03	0.04	0.06	0.07	0.11	0.16	0.22	0.30	0.40

Dimensions in mm.

Spare Parts for Valves and Fill Cluster

Type 55318, Type 55317 - Handwheel



for Cryogenic Globe Valves

Aluminium Handwheels

Part No.	Nominal size Globe Valve	colour
55318.0001.0402	DN10 - DN25	white (RAL 9010)
55318.0002.0402	DN32 - DN50	white (RAL 9010)

Part No.	Nominal size Globe Valve	colour
55317.0021.0402	DN65	silver (natural)
55317.0022.0402	DN80	silver (natural)
55317.0068.0402	DN100	silver (natural)
55317.0016.0402	DN150	silver (natural)
55317.0106.0402	DN200	silver (natural)

for Cryogenic Bellow sealed Valves

Part No.	Nominal size Bellow sealed Valve	colour
55317.0029.0402	DN10 - DN50	silver (natural)

for Cryogenic Gate Valves

Part No.	Nominal size Gate Valve	colour
55318.0002.0402	DN25 - DN40	white (RAL 9010)
55317.0029.0402	DN50 - DN80	silver (natural)
55317.0020.0402	DN100	silver (natural)



Handwheels (available colours) for Cryogenic Globe Valves DN10 - DN50

Part No.	Nominal size	colour
55318.0016.0402	DN10 - DN25	silver (natural)
55318.0017.0402	DN32 - DN50	silver (natural)




Part No.	Nominal size	colour
55318.0004.0402	DN10 - DN25	red (RAL 3000)
55318.0005.0402	DN32 - DN50	red (RAL 3000)




Part No.	Nominal size	colour
55318.0007.0402	DN10 - DN25	blue (RAL 5015)
55318.0008.0402	DN32 - DN50	blue (RAL 5015)



Part No.	Nominal size	colour
55318.0010.0402	DN10 - DN25	green (RAL 6005)
55318.0011.0402	DN32 - DN50	green (RAL 6005)



Part No.	Nominal size	colour
55318.0013.0402	DN10 - DN25	black (RAL 9011)
55318.0014.0402	DN32 - DN50	black (RAL 9011)

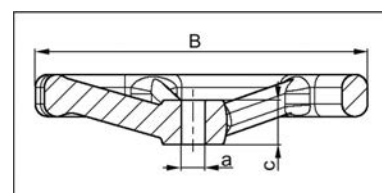

Type 55318	Technical data				Type 55317							
		.0001.0402		.0002.0402								
		.0004.0402		.0005.0402								
		.0007.0402		.0008.0402		.0016.0402	.0020.0402	.0021.0402	.0022.0402	.0029.0402	.0068.0402	.0106.0402
		.0010.0402		.0011.0402								
		.0013.0402		.0014.0402								
		.0016.0402		.0017.0402								
Handwheel-Ø	B	100		125	360	200	200	250	150	315	630	
Square	a	7		10	15	12	10	10	10	12	27	
Hub height	c	15		19.5	35.0	30.0	20.5	20.0	19.0	33.0	56.0	
Weight	ca. kg	0.1		0.15	3.4	0.85	0.8	0.15	0.35	2.5	9.7	

Dimensions in mm.

Spare Parts for Valves and Fill Cluster

Type 55579 - Valve locking



for Cryogenic-Globe Valves

Valve locking in vinyl
for protection against damage and unauthorized access.
locking with locking wire or padlock (shackle thickness max. 7.7mm) - not included
temperature range: -30°C up to +300°C

Part No. 55579.0005.0841

for handwheel diameter 60mm - 130mm

Part No. 55579.0006.0841

for handwheel diameter 131mm - 165mm

Part No. 55579.0007.0841

for handwheel diameter 166mm - 250mm


Part No. 55579.0008.0841

for handwheel diameter 251mm - 330mm

Available options - on request only:

- other colours
- additional sizes

Important: Please specify the diameter of handwheel when ordering.

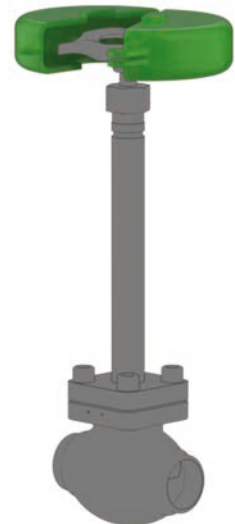

Spare Parts for Valves and Fill Cluster

Type 66394 - Alcatraz-Valve locking



Alcatraz-Valve locking

for protection against unauthorized operating of valves

valve interlock for DN10 - DN200

stainless steel 316 electro polished (offshore suitable)

with position indicator OPEN / CLOSED

handwheel made of G20Mn5, coated with dacromet

Part No. 66394.0100.0000C

Type SML 1 (Single key Multi turn interLock) interlocked with valve closed (DN10-DN150)

Part No. 66394.0100.0000O

Type SML 1 (Single key Multi turn interLock) interlocked with valve opened (DN10-DN150)

Part No. 66394.0100.0000C-O

Type DML 1 (Double key Multi turn interLock) interlocked with valve closed and opened (DN10-DN150)

Part No. 66394.0300.0000C

Type SML 3 (Single key Multi turn interLock) interlocked with valve closed (DN200)

Part No. 66394.0300.0000O

Type SML 3 (Single key Multi turn interLock) interlocked with valve opened (DN200)

Part No. 66394.0300.0000C-O

Type DML 3 (Double key Multi turn interLock) interlocked with valve closed and opened (DN200)

Part No. 66322.0002.0000

Control key for locking device

Part No. 66322.0003.0000

Master key for locking device

Part No. 66322.0004.2000

Key box for two keys

Part No. 66322.0004.3000


Key box for three keys

Part No. 66322.0004.4000

Key box for four keys



Materials	DIN EN	ASTM
1 Handwheel	1.6220	LCC
2 Stem adapter	1.4401	316
3 Mounting	1.4401	316
4 Fixation	1.4401	316
5 Multiturn main unit	1.4401 / 1.4408	316 / CF8M
6 Lock incl. flap	1.4401 / 1.4408	316 / CF8M
7 Key	1.4401 / 1.4408	316 / CF8M

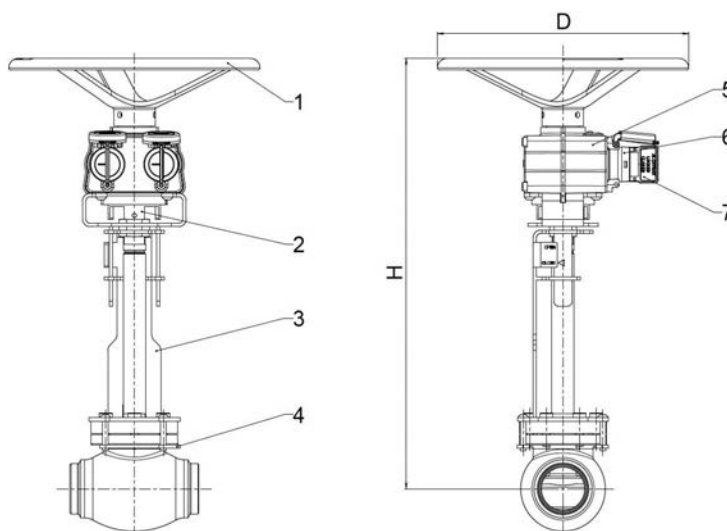

Type 66394	Technical Data					
Part No.	66394.	.0100.X	.0100.X	.0100.X	.0100.X	.0300.X
Nominal size	DN	10 - 65	80	100	150	200
Locking device	Type	SML1/DML1	SML1/DML1	SML1/DML1	SML1/DML1	SML3/DML3
Height	H	430/530	480/530	540	590	730
Diameter	D	303	303	303	303	653
Weight	ca. kg	5.3	5.3	5.3	5.3	9.4

Dimensions in mm.

Ball Valves and Spare Parts

Type 15C01 - Ball Valve full bore



Cryogenic Ball Valve, PN50

Unidirectional ball valve to be installed in flow direction with upstream pressure relief hole.

Socket weld connection for stainless steel pipes acc. to ISO 1127

Butt weld connection for stainless steel pipes acc. to ISO 1127

Female thread type NPT acc. to ANSI 1.20.1

Female thread type G (BSPP) acc. to ISO 228/1

Marking acc. to EN 1626

Available accessories:

· Lock for locking device type 55394.0019.0302




Applications:

Approved for air gases, vapours and cryogenic liquefied gases.

Working temperature: -196°C / -321°F (77K) up to +65°C / +149°F (338K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Side connection	1.4409	A 351 CF3M
3 Ball seal	PCTFE	
4 Ball	1.4404	A 479 Grade 316
5 Stem	1.4404	A 479 Grade 316
6 Bonnet extension	1.4409	A 351 CF3M
7 Gland packing	PTFE / Carbon filled (25%)	
8 Lever	1.4301	A 240 Grade 304

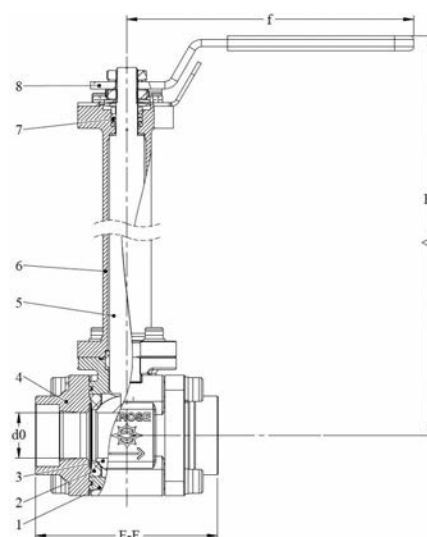

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Technical data - Standard design

Nominal size [DN]	Height (H) [mm]	Orifice [D ₀]	Weight [kg]	Kvs-value [m ³ /h]	Cv-value [gal/min]	Length (f) [mm]
15	291	14.5	1.3	10.7	12.5	127
25	304	25.0	3.3	32.1	37.6	157
50	400	50.0	12.0	193.8	226.8	420


Dimensions in mm.

Ball Valves and Spare Parts

Type 15C01 - Ball Valve full bore



Connection types



Butt weld connection acc. to


· ISO 1127

DN	Face-to-face dim. (FF) [mm]	Outside pipe-Ø ISO (RA) [mm]	Wall thickness pipe ISO (a) [mm]	Part No.
15	70	21.3	2.0	15C01.A001.000002
25	100	33.7	2.0	15C01.A001.000006
50	150	60.3	2.9	15C01.A001.000010

Butt weld connection acc. to

· ASTM A312

DN	Face-to-face dim. (FF) [mm]	Outside pipe-Ø ASTM (RA) [mm]	Wall thickness pipe ASTM (a) [mm]	Part No.
15	70	21.34	2.11	15C01.A001.000013
15	70	21.34	2.77	15C01.A001.000014
25	100	33.40	2.77	15C01.A001.000015
25	100	33.40	3.38	15C01.A001.000016
50	150	60.33	2.77	15C01.A001.000017
50	150	60.33	3.91	15C01.A001.000018



Socket weld connection acc. to

· ISO 1127

· ASTM A312

DN	Face-to-face dim. (FF) [mm]	Socket depth (b) [mm]	Socket diameter (B) [mm]	Part No.
15	70	10.0	21.3	15C01.A001.000001
25	100	13.0	33.7	15C01.A001.000005
50	150	16.0	60.3	15C01.A001.000009

Female thread type

· NPT acc. to ANSI 1.20.1

· G (BSPP) acc. to ISO 228/1

DN	Face-to-face dim. (FF) [mm]	Thread size (GW) [mm]	Part No.
15	70	G 1/2	15C01.A001.000003
25	100	G 1	15C01.A001.000007
50	150	G 2	15C01.A001.000011
15	70	NPT 1/2	15C01.A001.000004
25	100	NPT 1	15C01.A001.000008
50	150	NPT 2	15C01.A001.000012

Ball Valves and Spare Parts

Type 15C01 - Spare part kit



Part No. 15C01.X.E00101

consisting of:

- 2x Seats PCTFE
- 3x Cylinder screws stainless steel (head piece top)
- 1x Cylinder screw stainless steel (locking lever)
- 4x Cylinder screws stainless steel (head piece bottom)
- 8x Cylinder screws stainless steel (side parts)
- 2x Body gaskets PCTFE
- 1x Lower stem bearing PTFE/Glass fibre (25%)
- 1x Bonnet gasket PCTFE
- 2x Lock nuts stainless steel
- 1x Nut lock cover stainless steel
- 1x Thrust washer PTFE/Glass fibre (25%)
- 1x Hex nut stainless steel
- 2x Belleville washer stainless steel
- 1x Toothed lock washer stainless steel
- 1x Gland packing Graphite/PTFE
- 1x Gland stainless steel
- 12x Spring washer stainless steel

suitable for:

Type	Nominal size
15C01	DN15, DN25, DN50



Type 15C01	Technical data			
Nominal size	DN	15	25	50
Dimension code	.X.	0015	0025	0050

Ball Valves and Spare Parts

Type 15C01 - Lever



Part No. 15C01.X.E00201

consisting of:

- 1x Locking nut stainless steel
- 1x Toothed locked washer stainless steel
- 1x Lever stainless steel with vinyl cover

suitable for:

Type	Nominal size
15C01	DN15, DN25, DN50



Type 15C01	Technical data			
Nominal size	DN	15	25	50
Dimension code	.X.	0015	0025	0050

Ball Valves and Spare Parts

Type 15C01 - Topwork



Part No. 15C01.X.E00301

consisting of:

- 1x Topwork
- 4x Cylinder screws stainless steel
- 1x Lower stem bearing PTFE/Glass fibre (25%)
- 4x Spring washer stainless steel

suitable for:

Type	Nominal size
15C01	DN15, DN25, DN50



Type 15C01	Technical data			
Nominal size	DN	15	25	50
Dimension code	.X.	0015	0025	0050

Ball Valves and Spare Parts

Type 15C01 - Ball set




Part No. 15C01.X.E00401

consisting of:

- 1x Ball stainless steel
- 2x Seats PCTFE
- 3x Cylinder screws stainless steel (head piece top)
- 1x Cylinder screw stainless steel (locking lever)
- 4x Cylinder screws stainless steel (head piece bottom)
- 8x Cylinder screws stainless steel (side parts)
- 2x Body gaskets PCTFE
- 1x Lower stem bearing PTFE/Glass fibre (25%)
- 1x Bonnet gasket PCTFE
- 2x Lock nuts stainless steel
- 1x Nut lock cover stainless steel
- 1x Thrust washer PTFE/Glass fibre (25%)
- 1x Hex nut stainless steel
- 2x Belleville washer stainless steel
- 1x Toothed lock washer stainless steel
- 1x Gland packing Graphite/PTFE
- 1x Gland stainless steel
- 12x Spring washer stainless steel

suitable for:

Type	Nominal size
15C01	DN15, DN25, DN50



Type 15C01	Technical data			
Nominal size	DN	15	25	50
Dimension code	.X.	0015	0025	0050

Actuated Valves and Actuators

Type 01313 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN50

Bronze body and stainless steel topwork (internal parts bronze)

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 01313.X.*010

Socket end for copper pipes acc. to DIN EN 12449 or ASTM B88

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Socket end for stainless steel pipes acc. to ISO 1127
- Actuator "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

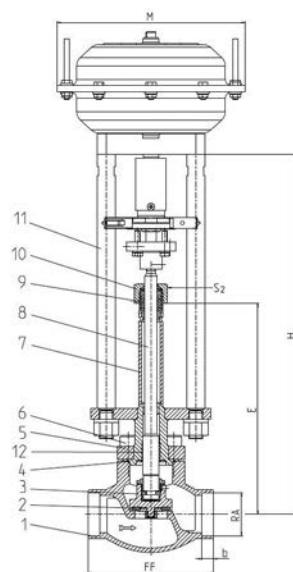

Type 01313 - Standard design	Technical data							
Nominal size	DN	10	15	20	25	32	40	50
Dimension code	.X.	X=DNRA, Example: valve DN 15 for copper pipe RA Ø 18mm, X=1518						
Face-to-face dimension	FF	60	85	85	115	115	140	160
Height	H	370	370	370	375	405	420	425
Length	E	195	195	200	200	230	230	235
Outside pipe-Ø	RA	dependent on order						
Socket depth	b	6	6	8	8	10	13	20
Actuator-Ø	M	dependent on actuator						
Wrench size across flats	S ₂	30	30	30	30	36	36	36
Weight w/o actuator	ca. kg	1.6	2.3	2.7	3.1	4.3	6.2	9.2
Kvs-Value	m ³ /h	1.6	4.3	6.7	11.5	12.1	22.6	37.1
Cv-Value	gal/min	1.9	5.0	7.8	13.4	14.1	26.3	43.2
Stroke	mm	10	10	7	9	9	11	15

Dimensions in mm.

Actuated Valves and Actuators

Type 01313 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN50

Bronze body and stainless steel topwork (internal parts bronze)

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 01313.X.*017

Complete with stainless steel stubs acc. to DIN EN 10216-5 or ASTM A312

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)
- Further pipe wall thicknesses

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900
13 Stainless steel stubs	1.4306	A 312 TP304L

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

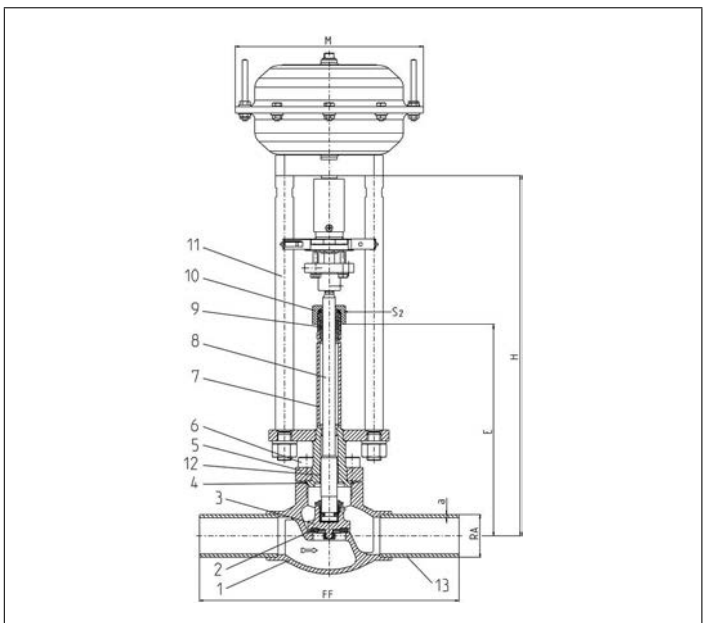

Type 01313 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	32	40	50
Dimension code	.X.	1012	1017	1521	2027	2533	3242	4048	5060
Face-to-face dimension	FF	210	210	235	235	265	265	290	310
Height	H	370	370	370	370	375	405	420	425
Length	E	195	195	195	200	200	230	230	235
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	42.4	48.3	60.3
Wall thickness pipe ISO 1127	a	1.0	2.3	2.6	2.9	3.2	3.2	3.6	3.6
Outside pipe-Ø ASTM A312	RA	-	17.15	21.34	26.67	33.4	42.16	48.26	60.33
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40							
Actuator-Ø	M	dependent on actuator							
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36
Weight w/o actuator	ca. kg	1.75	1.85	2.6	3.0	3.5	4.7	6.7	9.8
Kvs-Value	m ³ /h	1.6	2.2	4.3	6.7	11.5	12.1	22.6	37.1
Cv-Value	gal/min	1.9	2.6	5.0	7.8	13.4	14.1	26.3	43.2
Stroke	mm	10	10	10	7	9	9	11	15

Dimensions in mm.

Actuated Valves and Actuators

Type 01314 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN50

Bronze body and stainless steel topwork (internal parts bronze)

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 01314.X.*011

Female thread connection (G) acc. to ISO 228/1

Part No. 01314.X.*016

Female thread connection NPT acc. to ANSI B 1.20.1

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator "cleaned and degreased for oxygen service"
- Electric actuator · Valve with check disc

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

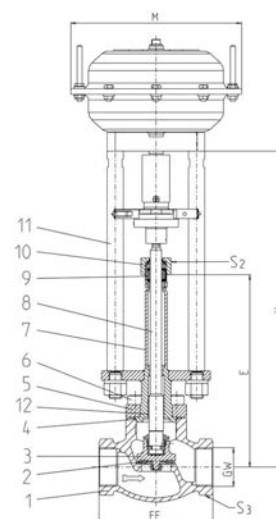

Type 01314 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	32	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	60	60	85	85	115	115	140	160
Height	H	370	370	370	370	375	405	420	425
Length	E	195	195	195	200	200	230	230	235
Actuator-Ø	M	dependent on actuator							
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36
Wrench size across flats	S ₃	rund	rund	30	36	41	rund	60	75
Weight w/o actuator	ca. kg	1.6	1.6	2.3	2.7	3.1	4.3	6.2	9.2
Kvs-Value	m ³ /h	1.6	2.2	4.3	6.7	11.5	12.1	22.6	37.1
Cv-Value	gal/min	1.9	2.6	5.0	7.8	13.4	14.1	26.3	43.2

Dimensions in mm.

Actuated Valves and Actuators

Type 02413 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN50

Bronze body and stainless steel topwork, inner parts in brass

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 02413.X.*011

Male thread for union connection

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Socket end for stainless steel pipes acc. to ISO 1127
- Actuator "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

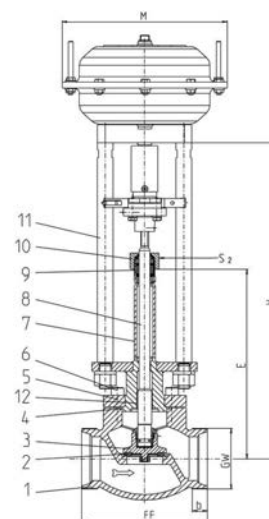

Type 02413 - Standard design	Technical data					
Nominal size	DN	10	20	32	40	50
Dimension code	.X.	0100	0200	0320	0400	0500
Face-to-face dimension	FF	60	85	115	140	160
Union thread	GW	M26x1.5	M40x2.0	M55x2.0	M65x2.0	M78x2.0
Height	H	370	370	405	420	425
Length	E	195	200	230	230	235
Thread length	b	10	11	14	17	20
Actuator-Ø	M	dependent on actuator				
Wrench size across flats	S ₂	30	30	36	36	36
Weight w/o actuator	ca. kg	1.6	2.7	4.3	6.2	9.2
Kvs-Value	m ³ /h	2.2	6.7	12.1	22.6	37.1
Cv-Value	gal/min	2.6	7.8	14.1	26.3	43.2
Stroke	mm	10	7	9	11	15

Dimensions in mm.

Actuated Valves and Actuators

Type 01343 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN50 (DN150=PN40)

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 01343.X.*01*

Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01343.X.*014

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available accessories:

- Solenoid valve · Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Actuator "cleaned and degreased for oxygen service"
- Electric actuator · Valve with check disc, valve with control disc (tapered design)
- Further pipe wall thicknesses


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900
13 Spring	CW452K	B 159 UNS C51900

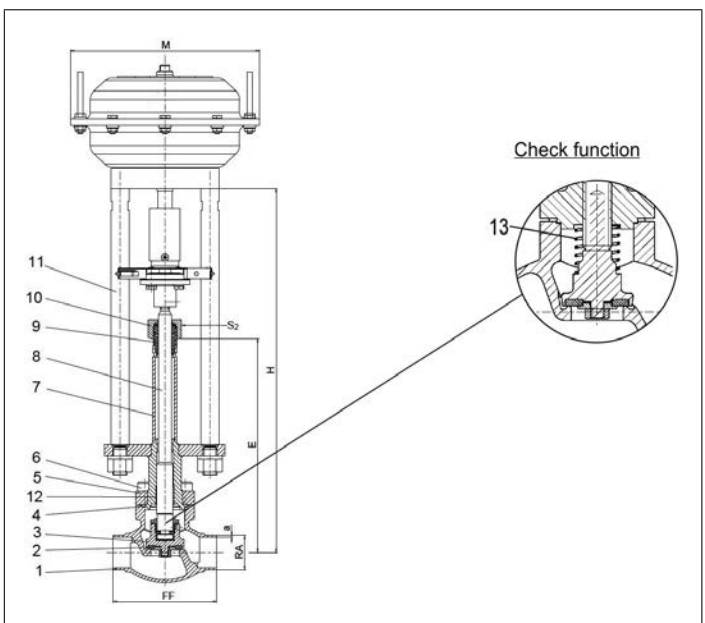

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 01343 - Standard design	Technical data													
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100	150
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114	0168
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280	400
Height	H	370	370	370	370	375	405	420	420	425	510	575	635	685
Length	E	195	195	195	200	200	230	230	230	235	300	300	300	350
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3	168.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0	7.1
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33	73.03	88.90	114.3	168.3
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40												
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20	20
Actuator-Ø	M	dependent on actuator												
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36	36	36	36	41	41
Weight w/o actuator	ca. kg	1.9	2.15	2.2	2.4	3.1	3.8	6.5	6.5	9.0	15.2	20.0	28.0	60.9
Kvs-Value	m³/h	1.6	3.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	1.9	4.4	5.0	7.8	13.4	16.2	23.9	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	10	10	7	9	9	11	11	15	23	23	30	40

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Actuated Valves and Actuators

Type 01343 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN50 (DN150=PN40)

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the standard actuator is not cleaned and degreased for oxygen

Part No. 01343.X.0010

possible connections:

- Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312
- Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312
- Female thread connection (G) acc. to ISO 228/1 or NPT acc. to ANSI B 1.20.1

Please specify the required connection when ordering!

Available options - on request only:

- Solenoid valves · Electropneumatic positioner
- Inductive Proximity Switches · Position and Limit Switches · Air control sets
- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Actuator "cleaned and degreased for oxygen service" · Electric actuator
- Valve with check disc · valve with control disc (tapered design)
- Further pipe wall thicknesses

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet Gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900
13 Spring	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

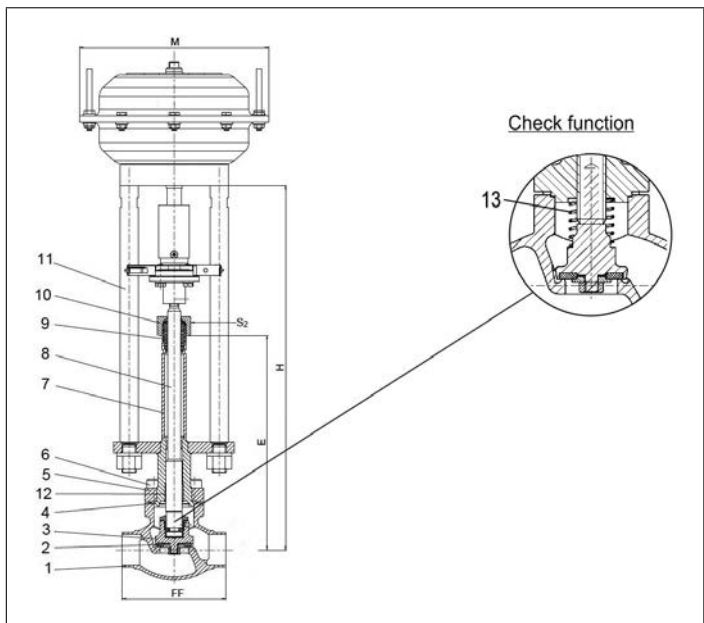

Type 01343 - Standard design	Technical Data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Face-to-face dimension	FF	70	85	100	115	115	130	155	205	245	280	400
Height	H	370	370	370	375	405	420	425	510	575	635	685
Length	E	195	195	200	200	230	230	235	300	300	300	350
Actuator-Ø	M	dependent on actuator										
Wrench size across flats	S ₂	30	30	30	30	36	36	36	36	36	41	41
Weight w/o actuator	ca. kg	1.9	2.15	2.4	3.1	3.8	6.5	9.0	15.2	20.0	28.0	60.9
Stroke	mm	10	10	7	9	9	11	15	23	23	30	40

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.


Actuated Valves and Actuators

Type 01343 - Actuated Globe Valve

HEROSE



Connection types



Butt weld connection acc. to
· ISO 1127

DN	Face-to-face dim. (FF) [mm]	Outside pipe-Ø ISO (RA) [mm]	Wall thickness pipe ISO (a) [mm]	Kvs-value [m³/h]	Cv-value [gal/min]	Weight w.a.* [kg]	Order reference
10	70	13.5	1.0	1.6	1.9	1.9	BW 13.5x1.0
15	85	17.2	1.6	3.8	4.4	2.2	BW 17.2x1.6
15	85	21.3	2.0	4.3	5.0	2.2	BW 21.3x2.0
20	100	26.9	2.0	6.7	7.8	2.4	BW 26.9x2.0
25	115	33.7	2.0	11.5	13.4	3.1	BW 33.7x2.0
32	115	38.0	2.0	14.0	16.2	3.8	BW 38.0x2.0
40	130	42.4	2.0	20.6	23.9	6.5	BW 42.4x2.0
40	130	48.3	2.0	22.6	26.3	6.5	BW 48.3x2.0
50	155	60.3	2.0	37.1	43.2	9.0	BW 60.3x2.0
65	205	76.1	2.6	71.1	82.7	15.2	BW 76.1x2.6
80	245	88.9	3.2	104.0	120.9	20.0	BW 88.9x3.2
100	280	114.3	6.0	170.0	195.2	28.0	BW 114.3x6.0
150	400	168.3	7.1	350.0	401.8	60.9	BW 168.3x7.1

Butt weld connection acc. to
· ASTM A312

DN	Face-to-face dim. (FF) [mm]	Outside pipe-Ø ASTM (RA) [inch / mm]	Wall thickness pipe ASTM (a) [mm]	Kvs-value [m³/h]	Cv-value [gal/min]	Weight w.a.* [kg]	Order reference
10	70	1/4" / 13.72	1.65	1.6	1.9	1.9	BW 13.72x1.65
15	85	1/2" / 17.15	1.65	3.8	4.4	2.2	BW 17.15x1.65
15	85	1/2" / 21.34	2.11	4.3	5.0	2.2	BW 21.34x2.11
20	100	3/4" / 26.67	2.11	6.7	7.8	2.4	BW 26.67x2.11
25	115	1" / 33.40	2.77	11.5	13.4	3.1	BW 33.40x2.77
40	130	1-1/2" / 42.16	2.77	20.6	23.9	6.5	BW 42.16x2.77
40	130	1-1/2" / 48.26	2.77	22.6	26.3	6.5	BW 48.26x2.77
50	155	2" / 60.32	2.77	37.1	43.2	9.0	BW 60.32x2.77
65	205	2-1/2" / 73.02	3.05	71.1	82.7	15.2	BW 73.02x3.05
80	245	3" / 88.90	3.05	104.0	120.9	20.0	BW 88.90x3.05
100	280	4" / 114.30	3.05	170.0	195.2	28.0	BW 114.30x3.05
150	400	6" / 168.27	3.40	350.0	401.8	60.9	BW 168.27x3.40
10	70	1/4" / 13.72	2.24	1.6	1.9	1.9	BW 13.72x2.24
15	85	1/2" / 17.15	2.31	3.8	4.4	2.2	BW 17.15x2.31
15	85	1/2" / 21.34	2.77	4.3	5.0	2.2	BW 21.34x2.77
20	100	3/4" / 26.67	2.87	6.7	7.8	2.4	BW 26.67x2.87
25	115	1" / 33.40	3.38	11.5	13.4	3.1	BW 33.40x3.38
40	130	1-1/2" / 42.16	3.56	20.6	23.9	6.5	BW 42.16x3.56
40	130	1-1/2" / 48.26	3.68	22.6	26.3	6.5	BW 48.26x3.68
50	155	2" / 60.32	3.91	37.1	43.2	9.0	BW 60.32x3.91
65	205	2-1/2" / 73.02	5.16	71.1	82.7	15.2	BW 73.02x5.16
80	245	3" / 88.90	5.49	104.0	120.9	20.0	BW 88.90x5.49
100	280	4" / 114.30	6.02	170.0	195.2	28.0	BW 114.30x6.02
150	400	6" / 168.27	7.11	350.0	401.8	60.9	BW 168.27x7.11

w.a.* = without actuator

Actuated Valves and Actuators

Type 01343 - Actuated Globe Valve


HEROSE



Connection types

Socket weld connection acc. to


- ISO 1127
- ASTM A312



DN	Face-to-face dim. (FF) [mm]	Socket depth (b) [mm]	Socket diameter (B) [mm]	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.a.* [kg]	order reference [ØISO / ØASTM]
10	70	6	14.1	1.6	1.9	1.9	SW 13.5 / 13.72
15	85	10	17.5	3.8	4.4	2.2	SW 17.2 / 17.15
15	85	10	21.5	4.3	5.0	2.2	SW 21.3 / 21.34
20	100	13	27.5	6.7	7.8	2.4	SW 26.9 / 26.67
25	115	13	34.1	11.5	13.4	3.1	SW 33.7 / 33.4
40	130	13	42.8	20.6	23.9	6.5	SW 42.4 / 42.16
40	130	13	48.6	22.6	26.3	6.5	SW 48.3 / 48.26
50	155	16	61.1	37.1	43.2	9.0	SW 60.3 / 60.32
65	205	16	74.0	71.1	82.7	15.1	SW 73.02
65	205	16	76.8	71.1	82.7	15.2	SW 76.1
80	245	16	90.0	104.0	120.9	20.0	SW 88.9
100	280	20	114.8	170.0	195.2	28.0	SW 114.3
150	400	20	168.2	350.0	401.8	60.9	SW 168.3 / 168.27

Female thread connection acc. to

- ISO 228/1 (G)
- NPT acc. to ANSI B 1.20.1 (NPT)



DN	Face-to-face dim. (FF) [mm]	Thread size (GW)	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.a.* [kg]	order reference G-Thread	order reference NPT-Thread
10	70	1/4"	1.6	1.9	1.9	1/4 BSPP	1/4" NPT
10	70	3/8"	2.2	2.6	1.9	3/8 BSPP	3/8" NPT
15	85	1/2"	4.3	5.0	2.2	1/2 BSPP	1/2" NPT
20	100	3/4"	6.7	7.8	2.4	3/4 BSPP	3/4" NPT
25	115	1"	11.5	13.4	3.1	1 BSPP	1" NPT
40	130	1-1/4"	20.6	23.9	6.5	1-1/4 BSPP	1-1/4" NPT
40	130	1-1/2"	22.6	26.3	6.5	1-1/2 BSPP	1-1/2" NPT
50	155	2"	37.1	43.2	9.0	2 BSPP	2" NPT

w.a.* = without actuator

Actuated Valves and Actuators

Type 01343 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN25

Stainless steel body and topwork
 Actuator - air opens, spring closes or contrary
 "live loaded" gland packing

Part No. 01343.0219.*01*

Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01343.0219.*014

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

In flow direction, the valve with the nominal size DN200 is conform to tightness class

L1 up to 12 bar maximum differential pressure acc. to DIN 12567 for LNG use.

This standard can also be used for the tightness class of other cryogenic gases.

Available accessories/options - on request only:

- Solenoid valve · Limit switch · Electropneumatic positioner etc.
- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312
- Actuator "cleaned and degreased for oxygen service"
- Valve with check or control disc (tapered design)


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

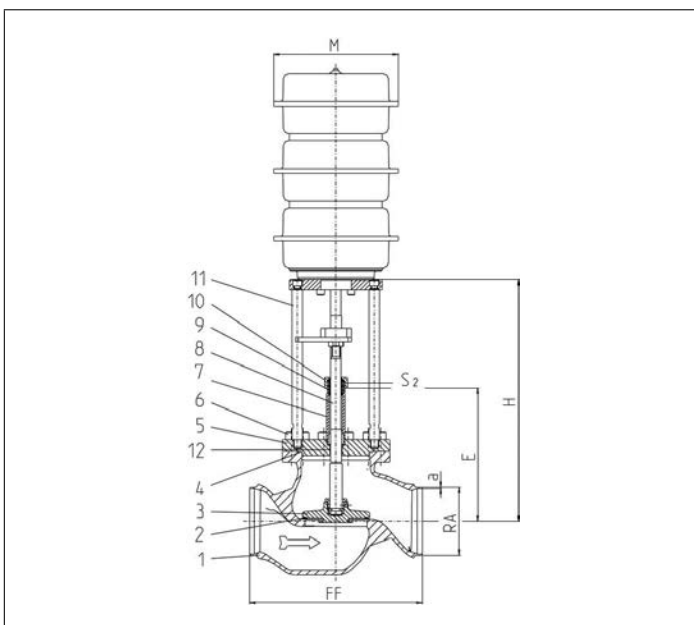

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 01343 - Standard design	Technical data	
Nominal size	DN	200
Face-to-face dimension	FF	560
Height	H	785
Length	E	410
Outside pipe-Ø ISO 1127	RA	219.1
Wall thickness pipe ISO 1127	a	6.3
Outside pipe-Ø ASTM A312	RA	219.1
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40
Socket depth	b	15
Actuator-Ø	M	depend on actuator
Wrench size across flats	S ₂	65
Weight w/o actuator	ca. kg	165.0
Kvs-Value	m ³ /h	680.0
Cv-Value	gal/min	786.0
Stroke	mm	60

Dimensions in mm.

Actuated Valves and Actuators

Type 01344 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN50

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 01344.X.*011

Female thread connection (G) acc. to ISO 228/1

Part No. 01344.X.*016

Female thread connection NPT acc. to ANSI B 1.20.1

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator "cleaned and degreased for oxygen service"
- Electric actuator · Valve with check disc

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

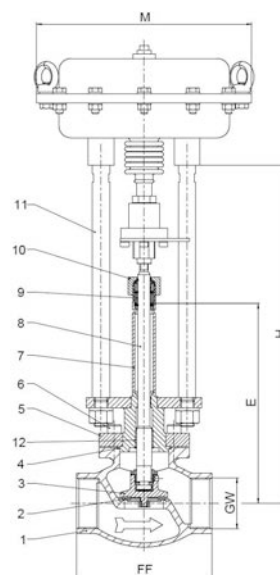

Type 01344 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	32	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	60	60	85	85	115	115	140	160
Height	H	370	370	370	370	375	405	420	425
Length	E	195	195	195	200	200	230	230	235
Actuator-Ø	M	dependent on actuator							
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36
Wrench size across flats	S ₃	rund	rund	30	36	41	rund	60	75
Weight w/o actuator	ca. kg	1.6	1.6	2.3	2.7	3.1	4.3	6.2	9.2
Kvs-Value	m ³ /h	1.6	2.2	4.3	6.7	11.5	12.1	22.6	37.1
Cv-Value	gal/min	1.9	2.6	5.0	7.8	13.4	14.1	26.3	43.2

Dimensions in mm.

Actuated Valves and Actuators

Type 03323 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN16

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03323.X.*014

Flanged connection acc. to DIN EN 1092-1 PN16

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

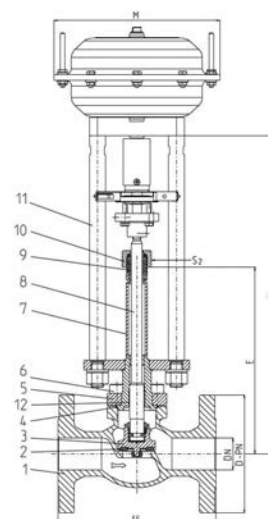

Type 03323 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN16	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	220	285
Face-to-face dimension	FF	140	150	160	200	230	295	310	350	510
Height	H	370	370	375	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	350
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	87.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	40

Dimensions in mm.

Actuated Valves and Actuators

Type 03323 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN40

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03323.X.*012

Flanged connection acc. to DIN EN 1092-1 PN40

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

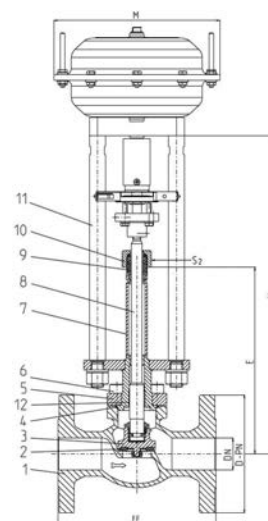

Type 03323 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	370	370	375	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	350
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	100.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	40

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Actuated Valves and Actuators

Type 03323 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, class 300

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03323.X.*013

Flanged connection acc. to ANSI B16.5 class 300

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

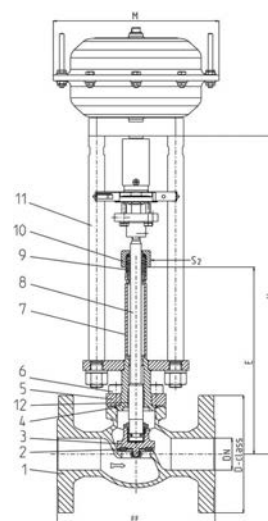

Type 03323 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	370	370	375	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	350
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	100.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	40

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Actuated Valves and Actuators

Type 03323 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, class 150

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03323.X.*011

Flanged connection acc. to ANSI B16.5 class 150

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	CW614N	B 283 UNS C38500
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	CW614N	B 283 UNS C38500
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

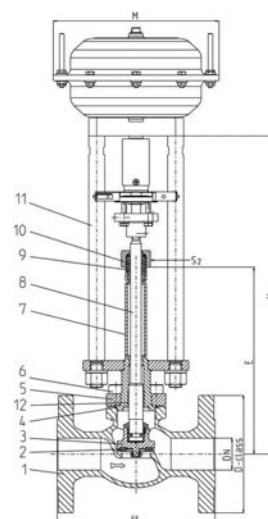

Type 03323 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	370	370	375	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	350
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	87.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	40

Dimensions in mm.

Actuated Valves and Actuators

Type 03343 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN16

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03343.X.*014

Flanged connection acc. to DIN EN 1092-1 PN16

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

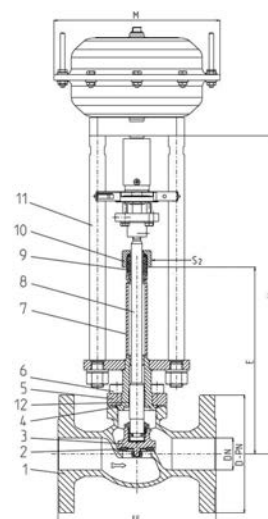

Type 03343 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN16	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	220	285
Face-to-face dimension	FF	140	150	160	200	230	295	310	350	510
Height	H	370	370	375	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	350
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	87.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	40

Dimensions in mm.

Actuated Valves and Actuators

Type 03343 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN40

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03343.X.*012

Flanged connection acc. to DIN EN 1092-1 PN40

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

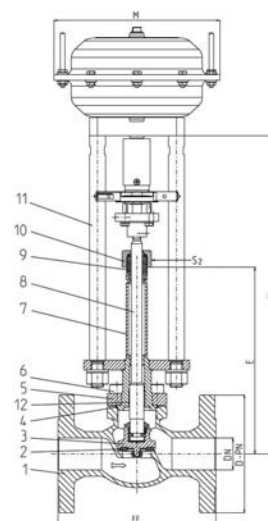

Type 03343 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	370	370	370	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	300
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	100.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	40

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Actuated Valves and Actuators

Type 03343 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, class 300

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03343.X.*013

Flanged connection acc. to ANSI B16.5 class 300

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

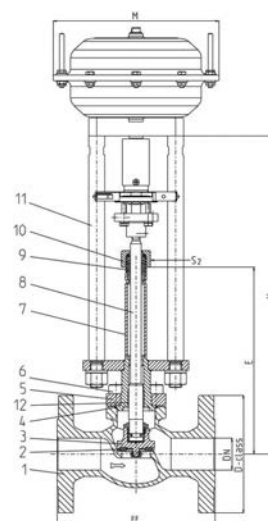

Type 03343 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	370	370	370	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	300
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	100.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	40

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Actuated Valves and Actuators

Type 03343 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, class 150

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03343.X.*011

Flanged connection acc. to ANSI B16.5 class 150

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

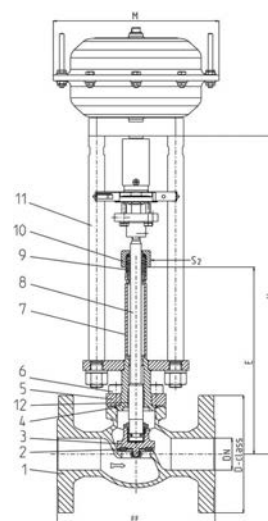

Type 03343 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	370	370	370	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	300
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	87.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	40

Dimensions in mm.

Actuated Valves and Actuators

Type 03343 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, class 150

Stainless steel body and topwork
 Actuator - air opens, spring closes or contrary
 "live loaded" gland packing

Part No. 03343.8000.X

Flanged connection acc. to ANSI B16.5 class 300

In flow direction, the valve with the nominal size DN200 is conform to tightness class L1 up to 18 bar maximum differential pressure acc. to DIN 12567 for LNG use.
 This standard can also be used for the tightness class of other cryogenic gases.

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check or control disc (tapered design)


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
 Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
1a Flange	1.4301	A 276 Grade 304
2 Valve seal	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

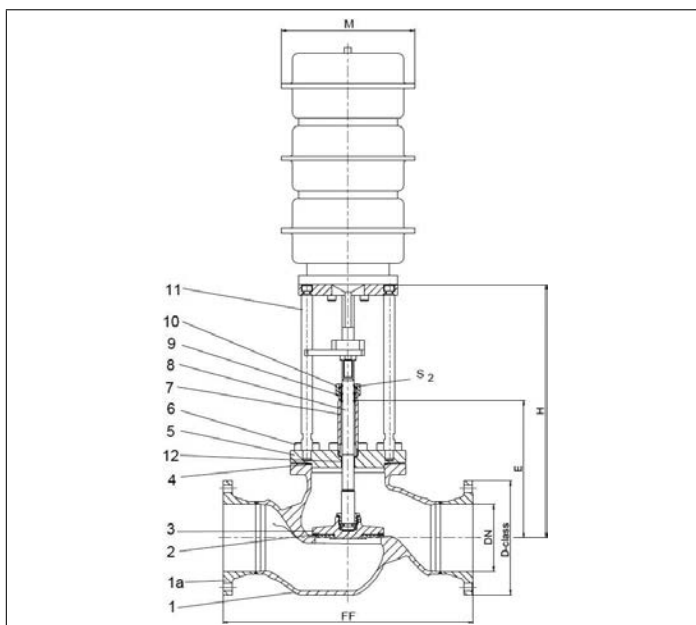

Type 03343 - Standard design	Technical data	
Nominal size	DN	200
Dimension code	.X.	8000
Flange-Ø	D-class	345
Face-to-face dimension	FF	760
Height	H	785
Length	E	410
Actuator-Ø	M	dependent on actuator
Wrench size across flats	S ₂	30
Weight w/o actuator	ca. kg	135
Kvs-Value	m ³ /h	680
Cv-Value	gal/min	786
Stroke	mm	60

Dimensions in mm.

Actuated Valves and Actuators

Type 01343 - Actuated Control Valve



Cryogenic-Control Valves with Pneumatic Actuator, PN50

Control characteristic: linear or equal percentage

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 01343.X.*61*

Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01343.X.*614

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available accessories:

- Solenoid valve · Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Actuator "cleaned and degreased for oxygen service"
- Electric actuator

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

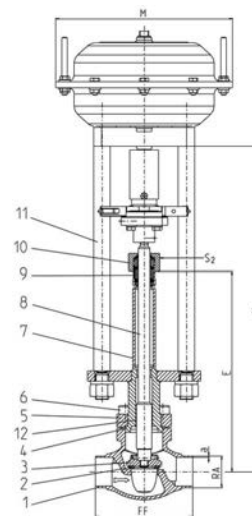

Type 01343 - Standard design	Technical data									
Nominal size	DN	15	20	25	32	40	50	65	80	100
Dimension code	.X.	1521	2026	2533	3238	4048	5060	657x	8088	0114
Face-to-face dimension	FF	85	100	115	115	130	155	205	245	280
Height	H	370	370	375	405	420	425	510	575	635
Length	E	195	200	200	230	230	235	300	300	300
Outside pipe-Ø ISO 1127	RA	21.3	26.9	33.7	38.0	48.3	60.3	76.1	88.9	114.3
Wall thickness pipe ISO 1127	a	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0
Outside pipe-Ø ASTM A312	RA	21.34	26.67	33.4	-	48.26	60.33	73.03	88.90	114.3
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40								
Socket depth	b	10	13	13	-	13	16	16	16	20
Actuator-Ø	M									
Wrench size across flats	S ₂	30	30	30	36	36	36	36	36	41
Weight w/o actuator	ca. kg	2.2	2.4	3.1	3.8	6.5	9.0	15.2	20.0	28.0
Stroke	mm	20	20	20	30	40	30	40	40	40

Dimensions in mm.

Actuated Valves and Actuators

Type 01343 - Actuated Control Valve



HEROSE



Flow coefficient for Control Valves - Control characteristic linear Kvs-Value in m³/h, Cv-Value in gal/min

Type 01343 Control valve																		
Lift in mm	20	20	20	20	20	20	30	30	30	30	30	30	40	40	40	40	40	40
Seat-Ø in mm	15	15	20	20	25	25	32	32	36	36	45	45	62	62	76	76	94	94
Nominal size	Kvs	Cv	Kvs	Cv	Kvs	Cv	Kvs	Cv	Kvs	Cv	Kvs	Cv	Kvs	Cv	Kvs	Cv	Kvs	Cv
DN 15	3.5	4.0																
DN 20			6.3	7.3														
DN 25					10.0	11.6												
DN 32							16.0	18.5										
DN 40									19.0	22.0								
DN 50											30.0	34.7						
DN 65													60.0	69.3				
DN 80															86.0	99.4		
DN 100																	140.0	161.8

Ideal inherent linear characteristic line acc. to DIN IEC 60534 Part 2-4





Sample drawing cone,
control characteristic linear

Flow coefficient for Control Valves - Control characteristic equal percentage Kvs-Value in m³/h, Cv-Value in gal/min

Type 01343 Control valve																		
Lift in mm	20	20	20	20	20	20	30	30	30	30	30	30	40	40	40	40	40	40
Seat-Ø in mm	15	15	20	20	25	25	32	32	36	36	45	45	62	62	76	76	94	94
Nominal size	Kvs	Cv	Kvs	Cv	Kvs	Cv	Kvs	Cv	Kvs	Cv	Kvs	Cv	Kvs	Cv	Kvs	Cv	Kvs	Cv
DN 15	3.5	4.0																
DN 20			4.0	4.6														
DN 20			6.0	6.9														
DN 25					2.5	2.9												
DN 25					4.5	5.2												
DN 25					6.3	7.3												
DN 25					10.0	11.6												
DN 32							10.0	11.6										
DN 32							14.0	16.2										
DN 40									10.0	11.6								
DN 40									19.0	22.0								
DN 50											10.0	11.6						
DN 50											16.0	18.5						
DN 50											25.0	28.9						
DN 50											30.0	34.7						
DN 65													60.0	69.3				
DN 80															80.0	92.5		
DN 100																	130.0	150.3

Ideal inherent equal percentage characteristic curve acc. to DIN IEC 60534 Part 2-4



Sample drawing cone,
control characteristic equal percentage

Actuated Valves and Actuators

Type 01423 - Actuated Top-Entry-Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN50 (DN100=PN40)

Stainless steel body and topwork

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 01423.X.3081

Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available accessories/options - on request only:

- Solenoid valve · Limit switch · Electropneumatic positioner etc.
- Extension H and A acc. to customer specification
- Actuator "cleaned and degreased for oxygen service"
- Valve with check disc, valve with control disc (tapered design)


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Guide bush	CC493K	B 505 UNS C93200
5 Stem	1.4301	A 276 Grade 304
6 Elongation tube	1.4541	A 213 TP 321
7 Elongation tube	1.4541	A 213 TP 321
8 Cold box feature	1.4301	A 276 Grade 304
9 Headpiece flange	1.4301	A 276 Grade 304
10 Headpiece	1.4301	A 276 Grade 304
11 Bolts	1.4301/A2	A 193 B8
12 Gland packing	Graphite / PTFE	
13 Gland nut	1.4404	A276 Grade 316L
14 Pillars	1.4404	A276 Grade 316L

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

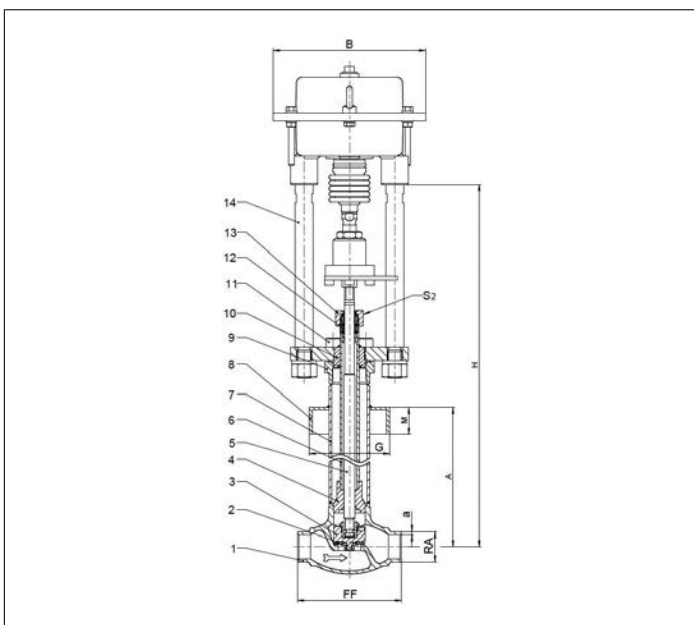

Type 01423 - Standard design		Technical data								
Nominal size	DN	10	15	20	25	40	50	65	80	100
Dimension code	.X.	1013	1521	2026	2533	4048	5060	6573	8088	0114
Face-to-face dimension	FF	70	85	100	115	130	155	205	245	280
Height	H	770	785	790	790	820	910	1105	1110	1290
Actuator-Ø	B	dependent on actuator								
Outside pipe-Ø ASTM A312	RA	13.50	21.34	26.67	33.40	48.26	60.33	73.00	89.00	114.30
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40								
Length	A	540	540	540	540	540	610	610	640	750
Length	G	acc. to customer specification								
Length	M	acc. to customer specification								
Wrench size across flats	S ₂	27	27	27	27	32	32	41	41	41
Stroke	mm	10	10	7	9	11	15	23	23	30
Weight without actuator	ca. kg	5.7	5.5	6.0	7.0	10.0	11.5	28.3	34.3	49.2
Kvs-Value	m ³ /h	1.6	4.3	6.7	11.5	20.6	37.1	71.1	104.0	168.0
Cv-Value	gal/min	1.9	5.0	7.8	13.4	26.3	43.2	83.2	121.7	196.6

Dimensions in mm.

Actuated Valves and Actuators

Type 27100 - Electric Actuator



Electric Actuators for Globe and Control Valves

mechanical position indicator, with emergency handwheel, protection class IP 65 (DIN VDE 0470)

power supply 24 V, 115 V, 230 V, 50/60 Hz, **(please indicate on purchase order)**

Mounting position: considering the mounting position of the valve

For outdoor installation or high humidity, we recommend the use of two heatings

Part No. 27100.0030.*02800

2x force switch - directly wired, 2x limit switch - directly wired

Part No. 27100.0060.*04500

2x force switch - directly wired, 2x limit switch - directly wired

Part No. 27100.0100.*09000

2x force switch - directly wired, 2x limit switch - directly wired

*AC=alternating current, *DC=direct current

Ambient temperature limit: -20°C / -4°F (253K) up to +70°C / +158°F (343K)


Available options - on request only:

- Potentiometer
- Digital positioner
- BLDC controller
- Electrical position transmitter
- Heating (-35°C / -31°F / 238K)
- Offshore / Onshore
- Failsafe option



DN	Differential pressure in bar									
	1.00	5.01	7.01	10.01	13.01	20.01	25.01	33.01	40.01	46.01
	5.00	7.00	10.00	13.00	20.00	25.00	33.00	40.00	46.01	50.00
10	A	A	A	A	A	A	A	A	A	A
15	A	A	A	A	A	A	A	A	A	A
20	A	A	A	A	A	A	A	A	A	A
25	A	A	A	A	A	A	A	A	B	B
32	A	A	A	A	A	A	B	B	B	B
40	A	A	A	A	A	B	B	B	C	C
50	A	A	A	A	B	B	C	C	C	o.r.
65	A	A	A	B	C	C	o.r. - on request			
80	B	B	B	C	o.r. - on request					
100	B	B	C	o.r. - on request						
150	o.r. - on request									
200	o.r. - on request									

Code in Table	Part No. Actuator
A	27100.0030.*02800
B	27100.0060.*04500
C	27100.0100.*09000

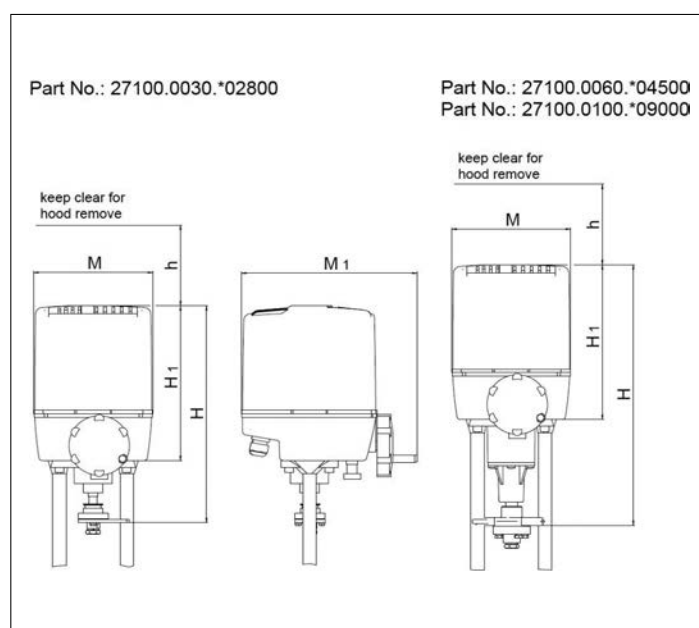

Type 27100		Technical Data		
Part No. Actuator:				
		.0030.*02800	.0060.*04500	.0100.*09000
Diameter	M	177	177	177
Diameter	M1	262	262	262
Operational force	kN	2.8	6.0	10.0
Operational speed	mm/s	0.28	0.45	0.90
Power consumption	VA	12 (10VADC)	46 (18VADC)	81 (41VADC)
Cable glands		4x M20	4x M20	4x M20
Height	H	327	393	393
Height	H1	233	233	233
Height	h	120	120	120
Weight	ca. kg	4.5	6.7	6.7
Stroke	mm	40	40	40

Dimensions in mm.

Actuated Valves and Actuators

Type 27511 - Pneumatic Actuator - Globe Valve (on/off)



Pneumatic Actuators for Globe Valves (on/off)

Actuator - air to open, **spring to close**


maximum air pressure for operation 6.0 bar g

Actuator coating outside - Epoxy resin

Available options - on request only:

- Pneumatic actuator with override handwheel

Ambient temperature limit: -20°C / -4°F (253K) up to +80°C / 176°F (353K)

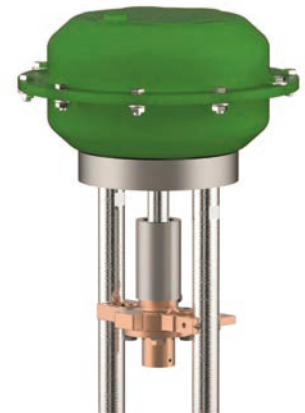


Overview - required actuator sizes for differential pressures

DN	Differential pressure in bar													
	0	3.1	4.1	7.1	10.1	11.1	15.1	18.1	20.1	22.1	30.1	33.1	35.1	
	3.0	4.0	7.0	10.0	11.0	15.0	18.0	20.0	22.0	30.0	33.0	35.0	50.0	
10	A	A	A	A	A	A	A	A	A	A	A	A	A	
15	A	A	A	A	A	A	A	A	A	A	A	A	A	
20	A	A	A	A	A	A	A	A	A	A	B	B	B	
25	A	A	A	A	A	A	A	A	B	B	B	B	B	
32	A	A	A	A	A	B	B	B	B	B	B	B	C	
40	B	B	B	B	B	B	B	B	B	C	C	C	C	
50	B	B	B	B	B	B	C	C	C	C	C	C	D	
65	B	B	B	C	C	C	C	D	E	E	E	F	F	
80	B	B	C	C	D	E	E	E	E	F	F	F	G	
100	B	C	D	E	E	F	F	F	F	G	o.r. - on request			
150	D	E	F	G	o.r. - on request									

Code in Table	Part No. Actuator
A	27511.15A6.3SPO
B	27511.35B6.6GPO
C	27511.60A6.6GPO
D	27511.60C6.7GPO
E	27511.75B6.3DPO
F	27511.75B6.5DPO
G	27511.75B6.7DPO

Materials	DIN EN	ASTM
1 Body	1.0333	A 619 Grade 1008
2 Body	1.0333	A 619 Grade 1008
3 Diaphragm	NBR	
4 Springs	1.1200	A 576 Grade 1045
5 Actuator stem	1.4301	A 276 Grade 304
6 Coupling	CC333G	B 148 UNS C95800

spring to close

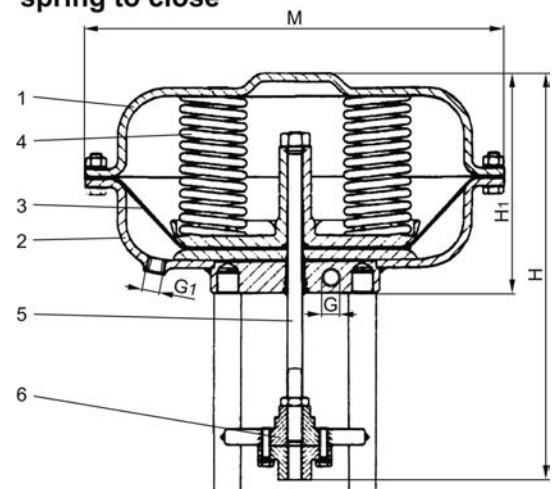

Type 27511		Technical data						
Part No. Actuator		27511						
		.15A6.3SPO	.35B6.6GPO	.60A6.6GPO	.60C6.7GPO	.75B6.3DPO	.75B6.5DPO	.75B6.7DPO
Diameter Actuator	M	162	210	310	310	430	430	430
Height	H	256	276	309	352	353	353	353
Height	H1	116	136	166	186	234	234	234
Thread	G	G1/8" with Ermeto- Fitting L8	-	-	-	-	-	-
Thread	G1	-	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT
Diaphragm area	cm ²	120	280	530	530	1000	1000	1000
Spring range	bar	0.9 - 2.0	0.8 - 3.0	0.8 - 2.8	0.7 - 3.0	0.7 - 2.1	1.2 - 3.4	1.6 - 4.7
Minimum air pressure	bar	2.2	3.2	3.0	3.2	2.3	3.6	4.9
Regulating lift	mm	20	35	40	60	60	60	60
Weight	ca. kg	3.0	5.0	12.5	14.0	37.0	39.0	41.0

Dimensions in mm.

Actuated Valves and Actuators

Type 27511 - Pneumatic Actuator - Control Valve



Pneumatic Actuators for Control Valves

Actuator - air to open, **spring to close**


maximum air pressure for operation 6.0 bar g

Actuator coating outside - Epoxy resin

Available options - on request only:

· Pneumatic actuator with override handwheel

Ambient temperature limit: -20°C / -4°F (253K) up to +80°C / 176°F (353K)

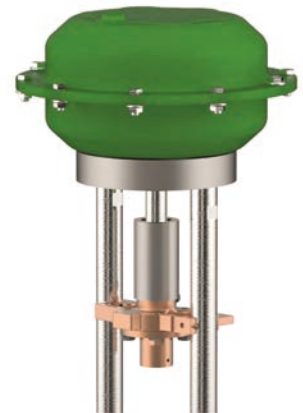


Overview - required actuator sizes for differential pressures

DN	Differential pressure in bar															
	0	2.1	4.1	6.1	8.1	10.1	12.1	15.1	17.1	19.1	22.1	25.1	29.1	35.1	39.1	42.1
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	2.0	4.0	6.0	8.0	10.0	12.0	15.0	17.0	19.0	22.0	25.0	29.0	35.0	39.0	42.0	50.0
10	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
15	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
20	A	A	A	A	A	A	A	A	A	A	A	B	B	B	B	B
25	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	C
32	B	B	B	B	B	B	B	B	B	B	C	C	C	C	C	C
40	B	B	B	B	B	B	B	C	C	C	C	C	C	C	D	D
50	B	B	B	B	B	C	C	C	C	C	C	D	D	E	E	E
65	C	C	C	C	C	C	D	E	E	E	E	E	F	F	F	G
80	C	C	C	D	E	E	E	E	F	F	F	F	G	G	o.r.	
100	C	C	D	E	E	F	F	F	F	G	G	o.r. - on request				
150	D	E	F	F	G	o.r. - on request										

Code in Table	Part No.	Actuator
A	27511.15A6.3SPO	
B	27511.35B6.6GPO	
C	27511.60A6.6GPO	
D	27511.60C6.7GPO	
E	27511.75B6.3DPO	
F	27511.75B6.5DPO	
G	27511.75B6.7DPO	

Materials	DIN EN	ASTM
1 Body	1.0333	A 619 Grade 1008
2 Body	1.0333	A 619 Grade 1008
3 Diaphragm	NBR	
4 Springs	1.1200	A 576 Grade 1045
5 Actuator stem	1.4301	A 276 Grade 304
6 Coupling	CC333G	B 148 UNS C95800

spring to close

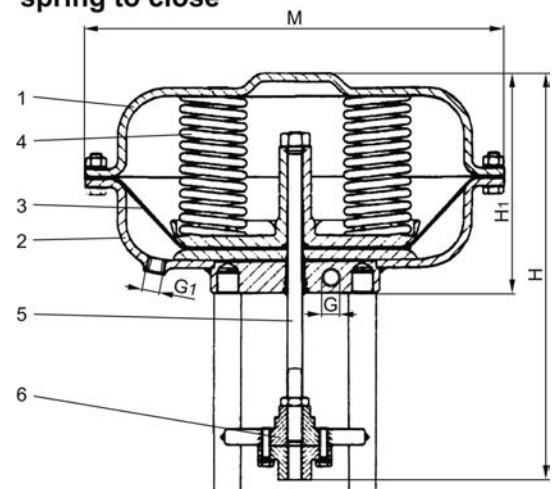

Type 27511		Technical data						
Part No. Actuator		27511						
		.15A6.3SPO	.35B6.6GPO	.60A6.6GPO	.60C6.7GPO	.75B6.3DPO	.75B6.5DPO	.75B6.7DPO
Diameter Actuator	M	162	210	310	310	430	430	430
Height	H	256	276	309	352	353	353	353
Height	H1	116	136	166	186	234	234	234
Thread	G	G1/8" with Ermeto- Fitting L8	-	-	-	-	-	-
Thread	G1	-	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT
Diaphragm area	cm ²	120	280	530	530	1000	1000	1000
Spring range	bar	0.9 - 2.0	0.8 - 3.0	0.8 - 2.8	0.7 - 3.0	0.7 - 2.1	1.2 - 3.4	1.6 - 4.7
Minimum air pressure	bar	2.2	3.2	3.0	3.2	2.3	3.6	4.9
Regulating lift	mm	20	35	40	60	60	60	60
Weight	ca. kg	3.0	5.0	12.5	14.0	37.0	39.0	41.0

Dimensions in mm.

Actuated Valves and Actuators

Type 27512 - Pneumatic Actuator - Globe Valve (on/off)



Pneumatic Actuators for Globe Valves (on/off)

Actuator - **spring to open**, air to close

maximum air pressure for operation 6.0 bar g

Actuator coating outside - Epoxy resin

Available options - on request only:


- Pneumatic actuator with override handwheel

Ambient temperature limit: -20°C / -4°F (253K) up to +80°C / 176°F (353K)

Overview - required actuator sizes for differential pressures

DN	Differential pressure in bar											
	0	5.1	7.1	14.1	17.1	19.1	22.1	26.1	29.1	35.1	37.1	45.1
	5.0	7.0	14.0	17.0	19.0	22.0	26.0	29.0	35.0	37.0	45.0	50.0
10	A	A	A	A	A	A	A	A	A	A	A	A
15	A	A	A	A	A	A	A	A	A	A	A	A
20	A	A	A	A	A	A	A	A	A	A	A	A
25	A	A	A	A	A	A	A	A	A	A	A	A
32	A	A	A	A	A	A	A	A	A	B	C	C
40	A	A	A	A	A	A	A	B	C	C	C	C
50	A	A	A	A	B	C	C	C	C	C	C	C
65	B	B	B	C	C	C	C	C	C	C	D	E
80	B	B	C	C	C	C	D	E	E	E	E	E
100	B	C	C	D	E	E	E	E	E	E	E	E
150	D	E	E	E	E	E						


o.r. - on request

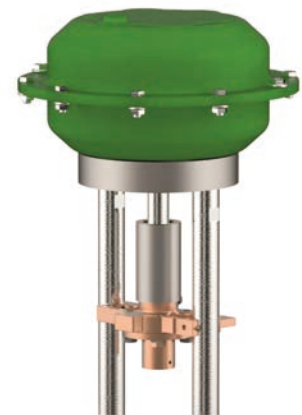

Code in Table	Part No. Actuator
A	27512.15A6.3SPS
B	27512.35B6.6GPS
C	27512.60A6.6GPS
D	27512.60C6.7GPS
E	27512.75B6.2SPS

Materials	DIN EN	ASTM
1 Body	1.0333	A 619 Grade 1008
2 Body	1.0333	A 619 Grade 1008
3 Diaphragm	NBR	
4 Springs	1.1200	A 576 Grade 1045
5 Actuator stem	1.4301	A 276 Grade 304
6 Coupling	CC333G	B 148 UNS C95800

spring to open

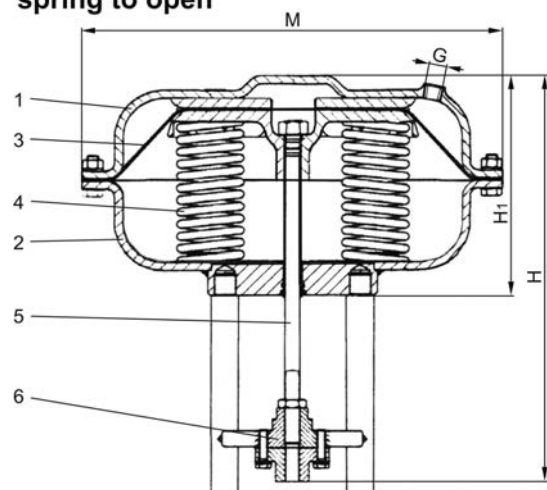

Type 27512		Technical data				
Part No. Actuator		27512				
		.15A6.3SPS	.35B6.6GPS	.60A6.6GPS	.60C6.7GPS	.75B6.2SPS
Diameter Actuator	M	162	210	310	310	430
Height	H	256	276	309	352	353
Height	H1	116	136	166	186	234
Thread	G	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT
Diaphragm area	cm ²	120	280	530	530	1000
Spring range	bar	0.9 - 2.0	0.8 - 3.0	0.8 - 2.8	0.7 - 3.0	0.3 - 0.9
Minimum air pressure	bar	6.0	6.0	6.0	6.0	6.0
Regulating lift	mm	20	35	40	60	60
Weight	ca. kg	3.0	5.0	12.5	14.0	37.0

Dimensions in mm.

Actuated Valves and Actuators

Type 27512 - Pneumatic Actuator - Control Valve



Pneumatic Actuators for Control Valves

Actuator - **spring to open**, air to close

maximum air pressure for operation 6.0 bar g

Actuator coating outside - Epoxy resin

Available options - on request only:

· Pneumatic actuator with override handwheel

Ambient temperature limit: -20°C / -4°F (253K) up to +80°C / 176°F (353K)

Overview - required actuator sizes for differential pressures


DN	Differential pressure in bar								
	0	5.1	13.1	15.1	21.1	23.1	29.1	34.1	37.1
	5.0	13.0	15.0	21.0	23.0	29.0	34.0	37.0	50.0
10	A	A	A	A	A	A	A	A	A
15	A	A	A	A	A	A	A	A	A
20	A	A	A	A	A	A	A	A	A
25	A	A	A	A	A	A	A	A	A
32	B	B	B	B	B	B	B	B	C
40	B	B	B	B	B	B	B	C	C
50	B	B	B	B	C	C	C	C	C
65	C	C	C	C	C	C	C	E	E
80	C	C	C	C	D	E	E	E	E
100	C	C	D	E	E	E	E	E	E
150	D	E	E	E	E	o.r. - on request			



Code in Table	Part No. Actuator
A	27512.15A6.3SPS
B	27512.35B6.6GPS
C	27512.60A6.6GPS
D	27512.60C6.7GPS
E	27512.75B6.2SPS

Materials	DIN EN	ASTM
1 Body	1.0333	A 619 Grade 1008
2 Body	1.0333	A 619 Grade 1008
3 Diaphragm	NBR	
4 Springs	1.1200	A 576 Grade 1045
5 Actuator stem	1.4301	A 276 Grade 304
6 Coupling	CC333G	B 148 UNS C95800

spring to open

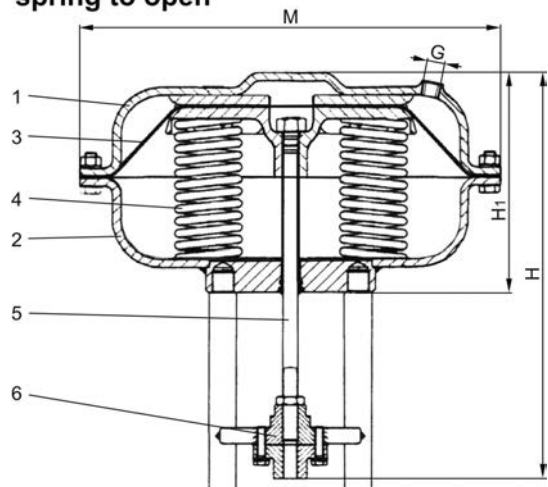

Type 27512		Technical data				
Part No. Actuator		27512				
		.15A6.3SPS	.35B6.6GPS	.60A6.6GPS	.60C6.7GPS	.75B6.2SPS
Diameter Actuator	M	162	210	310	310	430
Height	H	256	276	309	352	353
Height	H1	116	136	166	186	234
Thread	G	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT
Diaphragm area	cm ²	120	280	530	530	1000
Spring range	bar	0.9 - 2.0	0.8 - 3.0	0.8 - 2.8	0.7 - 3.0	0.3 - 0.9
Minimum air pressure	bar	6.0	6.0	6.0	6.0	6.0
Regulating lift	mm	20	35	40	60	60
Weight	ca. kg	3.0	5.0	12.5	14.0	37.0

Dimensions in mm.

Actuated Valves and Actuators

Type 27514 - Pneumatic Actuator - Globe Valve (on/off)



Pneumatic Actuators for Globe Valves (on/off)

Actuator - air to open, **spring to close**

maximum air pressure for operation 6.0 bar

Actuator coating: Delta Seal GZ (silver-grey)

Corrosion-protection class C5-M acc. to DIN EN ISO 12944

Available options - on request only:

· Pneumatic actuator with override handwheel

Ambient temperature limit: -40°C / -40°F (233K), Actuator J -20°C / -4°F (253K) up to +100°C / 212°F (373K)


Overview - required actuator sizes for differential pressures

DN	Differential pressure in bar											
	0	6.1	10.1	12.1	14.1	18.1	26.1	29.1	33.1	37.1	45.1	48.1
	- 6.0	- 10.0	- 12.0	- 14.0	- 18.0	- 26.0	- 29.0	- 33.0	- 37.0	- 45.0	- 48.0	- 50.0
10	A	A	A	A	A	A	A	A	A	A	A	A
15	A	A	A	A	A	A	A	A	A	A	A	A
20	A	A	A	A	A	A	A	A	A	A	A	A
25	A	A	A	A	A	A	A	A	A	B	B	B
32	A	A	A	A	A	A	B	B	B	C	C	C
40	A	A	A	A	B	B	C	C	C	C	D	D
50	A	A	B	B	C	C	D	D	D	D	D	D
65	D	D	D	D	D	D	D	E	E	E	F	F
80	D	D	D	D	E	E	E	E	F	F	F	F
100	D	D	E	E	E	F	F	F	G	G	G	G
150	E	F	F	G	G	H	H	-	-	-	-	-
200	I	I	I	J	J	-	-	-	-	-	-	-



Code in Table	Part No. Actuator
A	27514.DP30.2022
B	27514.DP32.2008
C	27514.DP32.2020
D	27514.DP33.3020
E	27514.DP34.5015
F	27514.DP34.5020
G	27514.DP34.T0PO (Tandem - Actuator)
H	27514.DP34.TRPO (Triple - Actuator)
I	27514.DP34.TRP1 (DN200 Triple - Actuator)
J	27514.DP35.6027

Materials	DIN EN	ASTM
1 Body	1.0335	A 622 Grade 1008
2 Diaphragm	NBR + tissue	
3 Springs	1.4310	A 313 Grade 301
4 Actuator stem	1.4571	A 276 Grade 316Ti
5 Coupling	1.4571	A 276 Grade 316Ti

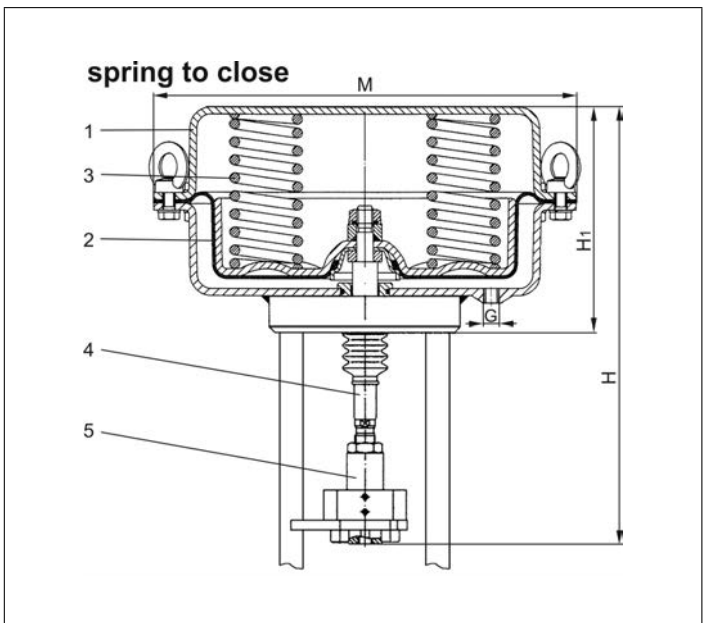

Type 27514		Technical data									
Part No. Actuator		27514									
		.DP30 .2022	.DP32 .2008	.DP32 .2020	.DP33 .3020	.DP34 .5015	.DP34 .5020	.DP34 .T0PO	.DP34 .TRPO	.DP34 .TRP1	.DP35 .6027
Diameter Actuator	M	168	250	250	300	405	405	405	405	405	755
Height	H	ca. 244	ca. 240	ca. 240	ca. 300	ca. 375	ca. 375	ca. 635	ca. 884	ca. 884	ca. 930
Height	H1	122	124	124	166	228	228	450	672	672	564
Thread	G	G 1/4"	G 1/4"	G 1/4"	G 1/4"	G 3/8"	G 3/8"	G 3/8"	G 1/2"	G 1/2"	G 1"
Diaphragm area	cm ²	80	250	250	400	800	800	1600 (2x800)	2400 (3x800)	2400 (3x800)	2800
Spring range	bar	2.2 - 4.5	0.8 - 2.4	2.0 - 3.8	2.0 - 4.0	1.5 - 3.0	2.0 - 4.0	2.0 - 4.0	2.0 - 4.0	2.0 - 4.0	2.72 - 3.8
Minimum air pressure	bar	4.8	2.7	3.6	4.5	3.3	4.5	4.5	4.5	4.5	4.3
Regulating lift	mm	20	20	20	30	50	50	50	65	65	65
Weight	ca. kg	5.0	9.0	9.0	15.0	45.0	45.0	116.0	150.0	152.0	325.0

Dimensions in mm.

Actuated Valves and Actuators

Type 27514 - Pneumatic Actuator - Control Valve



Pneumatic Actuators for Control Valves

Actuator - air to open, **spring to close**

maximum air pressure for operation 6.0 bar

Actuator coating: Delta Seal GZ (silver-grey)

Corrosion-protection class C5-M acc. to DIN EN ISO 12944

Available options - on request only:

· Pneumatic actuator with override handwheel

Ambient temperature limit: -40°C / -40°F (233K) up to +100°C / 212°F (373K)

Overview - required actuator sizes for differential pressures


DN	Differential pressure in bar									
	0	6.1	10.1	14.1	17.1	25.1	28.1	35.1	40.1	46.1
	6.0	10.0	14.0	17.0	25.0	28.0	35.0	40.0	46.0	50.0
10	A	A	A	A	A	A	A	A	A	A
15	A	A	A	A	A	A	A	A	A	A
20	A	A	A	A	A	A	A	B	B	C
25	A	A	A	A	A	B	C	C	C	C
32	D	D	D	D	D	D	D	D	D	D
40	D	D	D	D	D	D	D	D	D	D
50	D	D	D	D	D	D	D	D	D	D
65	E	E	E	E	E	E	E	E	F	F
80	E	E	E	E	E	F	F	G	G	G
100	E	E	E	E	F	G	G	G	G	H
150	E	F	G	H	H	o.r. - on request				



Code in Table	Part No. Actuator
A	27514.DP30.2022
B	27514.DP32.2008
C	27514.DP32.2020
D	27514.DP33.3020
E	27514.DP34.5015
F	27514.DP34.5020
G	27514.DP34.T0PO (Tandem - Actuator)
H	27514.DP34.TRPO (Triple - Actuator)

Materials	DIN EN	ASTM
1 Body	1.0335	A 622 Grade 1008
2 Diaphragm	NBR + tissue	
3 Springs	1.4310	A 313 Grade 301
4 Actuator stem	1.4571	A 276 Grade 316Ti
5 Coupling	1.4571	A 276 Grade 316Ti

spring to close

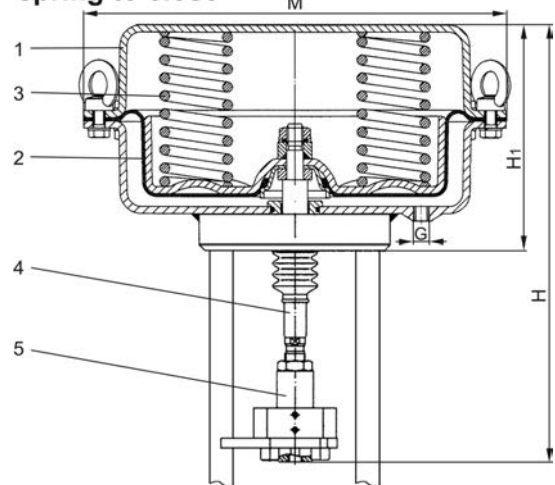

Type 27514		Technical data							
Part No. Actuator		27514							
		.DP30.2022	.DP32.2008	.DP32.2020	.DP33.3020	.DP34.5015	.DP34.5020	.DP34.T0PO (Tandem)	.DP34.TRPO (Triple)
Diameter Actuator	M	168	250	250	300	405	405	405	405
Height	H	ca. 244	ca. 240	ca. 240	ca. 300	ca. 375	ca. 375	ca. 635	ca. 884
Height	H1	122	124	124	166	228	228	450	672
Thread	G	G 1/4"	G 1/4"	G 1/4"	G 1/4"	G 3/8"	G 3/8"	G 3/8"	G 1/2"
Diaphragm area	cm ²	80	250	250	400	800	800	1600 (2x800)	2400 (3x800)
Spring range	bar	2.2 - 4.5	0.8 - 2.4	2.0 - 3.8	2.0 - 4.0	1.5 - 3.0	2.0 - 4.0	2.0 - 4.0	2.0 - 4.0
Minimum air pressure	bar	4.8	2.7	3.6	4.5	3.3	4.5	4.5	4.5
Regulating lift	mm	20	20	20	30	50	50	50	65
Weight	ca. kg	5.0	9.0	9.0	15.0	45.0	45.0	116.0	150.0

Dimensions in mm.

Actuated Valves and Actuators

Type 27515 - Pneumatic Actuator - Globe Valve (on/off)



Pneumatic Actuators for Globe Valves (on/off)

Actuator - **spring to open**, air to close

maximum air pressure for operation 6.0 bar

Actuator coating: Delta Seal GZ (silver-grey)

Corrosion-protection class C5-M acc. to DIN EN ISO 12944

Available options - on request only:

· Pneumatic actuator with override handwheel


Ambient temperature limit: -40°C / -40°F (233K) up to +100°C / 212°F (373K)

Overview - required actuator sizes for differential pressures

DN	Differential pressure in bar						
	0	13.1	18.1	20.1	25.1	35.1	45.1
	-	-	-	-	-	-	-
	13.0	18.0	20.0	25.0	35.0	45.0	50.0
10	A	A	A	A	A	A	A
15	A	A	A	A	A	A	A
20	A	A	A	A	A	A	A
25	A	A	A	A	A	A	B
32	A	A	A	A	B	B	B
40	A	A	A	B	B	B	B
50	A	B	B	B	B	B	B
65	B	B	B	B	B	C	C
80	B	B	B	C	C	D	D
100	B	C	C	D	D	D	o.r.
150	D	D	D	o.r. - on request			

Code in Table	Part No. Actuator
A	27515.DP30.2S06
B	27515.DP32.3S02
C	27515.DP33.3S02
D	27515.DP34.5S02

Materials	DIN EN	ASTM
1 Body	1.0335	A 622 Grade 1008
2 Diaphragm	NBR + tissue	
3 Springs	1.4310	A 313 Grade 301
4 Actuator stem	1.4571	A 276 Grade 316Ti
5 Coupling	1.4571	A 276 Grade 316Ti

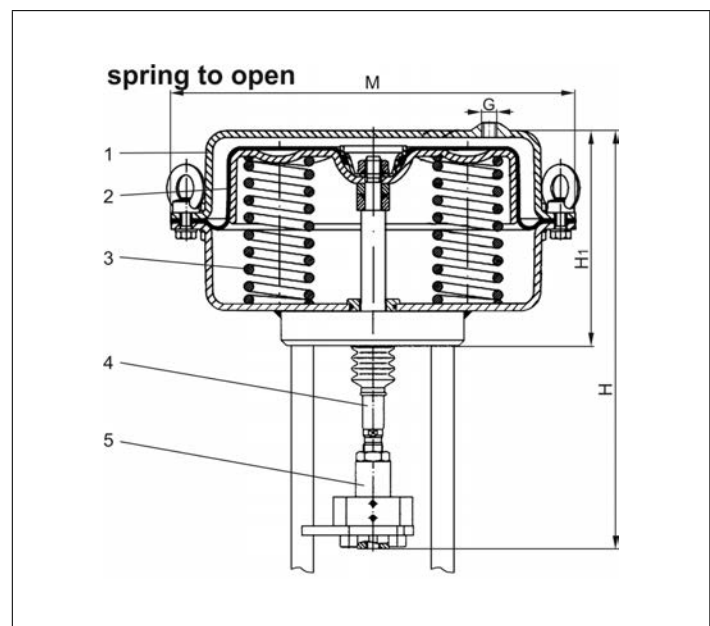

Type 27515		Technical data			
Part No. Actuator		27515			
		.DP30.2S06	.DP32.3S02	.DP33.3S02	.DP34.5S02
Diameter Actuator	M	168	250	300	405
Height	H	ca. 244	ca. 240	ca. 300	ca. 375
Height	H1	122	124	166	228
Thread	G	G 1/4"	G 1/4"	G 1/4"	G 3/8"
Diaphragm area	cm ²	80	250	400	800
Spring range	bar	0.6 - 1.5	0.2 - 1.0	0.2 - 1.0	0.2 - 1.0
Minimum air pressure	bar	6.0	6.0	6.0	6.0
Regulating lift	mm	20	30	30	50
Weight	ca. kg	5.0	9.0	15.0	45.0

Dimensions in mm.

Actuated Valves and Actuators

Type 27515 - Pneumatic Actuator - Control Valve



Pneumatic Actuators for Control Valves

Actuator - **spring to open**, air to close

maximum air pressure for operation 6.0 bar

Actuator coating: Delta Seal GZ (silver-grey)

Corrosion-protection class C5-M acc. to DIN EN ISO 12944

Available options - on request only:

· Pneumatic actuator with override handwheel

Ambient temperature limit: -40°C / -40°F (233K) up to +100°C / 212°F (373K)


Overview - required actuator sizes for differential pressures

DN	Differential pressure in bar		
	0	21.1	45.1
	-	-	-
	21.0	45.0	50.0
10	A	A	A
15	A	A	A
20	A	A	A
25	A	A	B
32	B	B	B
40	B	B	B
50	B	B	B
65	D	D	D
80	D	D	D
100	D	D	o.r.
150	D	o.r. - on request	



Code in Table	Part No.	Actuator
A	27515.DP30.2S06	
B	27515.DP32.3S02	
C	27515.DP33.3S02	
D	27515.DP34.5S02	

Materials	DIN EN	ASTM
1 Body	1.0335	A 622 Grade 1008
2 Diaphragm	NBR + tissue	
3 Springs	1.4310	A 313 Grade 301
4 Actuator stem	1.4571	A 276 Grade 316Ti
5 Coupling	1.4571	A 276 Grade 316Ti

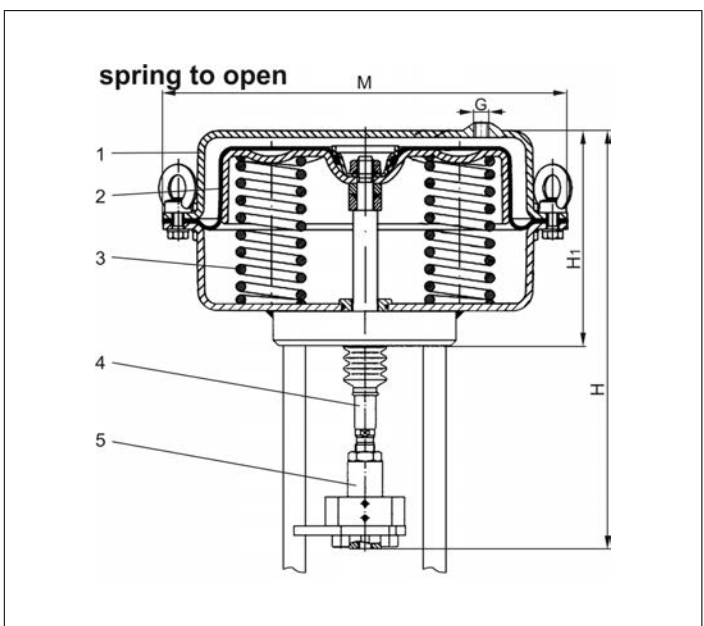

Type 27515	Technical data				
Part No. Actuator	27515				
		.DP30.2S06	.DP32.3S02	.DP33.3S02	.DP34.5S02
Diameter Actuator	M	168	250	300	405
Height	H	ca. 244	ca. 240	ca. 300	ca. 375
Height	H1	122	124	166	228
Thread	G	G 1/4"	G 1/4"	G 1/4"	G 3/8"
Diaphragm area	cm ²	80	250	400	800
Spring range	bar	0.6 - 1.5	0.2 - 1.0	0.2 - 1.0	0.2 - 1.0
Minimum air pressure	bar	6.0	6.0	6.0	6.0
Regulating lift	mm	20	30	30	50
Weight	ca. kg	5.0	9.0	15.0	45.0

Dimensions in mm.

Actuated Valves and Actuators

Type 01353 - Actuated Trailervalue



Cryogenic-Globe Valves with Pneumatic Actuator, PN50

air pressure for operation 6,0 bar g (maximum 10.0 bar g), push-in connection 8mm

Stainless steel body and topwork,

Actuator - air opens, spring closes

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 01353.X.T0**

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01353.X.T0*4

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Further pipe wall thicknesses
- Weather protection hood

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.


Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Ambient temperature actuator: -50°C / -58°F (223K) up to +70°C / +158°F (343K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	PTFE	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4306	A 312 TP 304L
8 Stem	1.4301	A 276 Grade 304
9 Spring	1.4571	A 313 Grade 316Ti
10 Flange	1.4301	A 276 Grade 304
11 Headpiece	1.4301	A 276 Grade 304
12 Gland packing	Graphite / PTFE	
13 Gland nut	1.4571	A 276 Grade 316Ti
14 Pillars	1.4301	A 276 Grade 304
15 Bush	CW452K	B 159 UNS C51900
16 Actuator	Rubber	

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

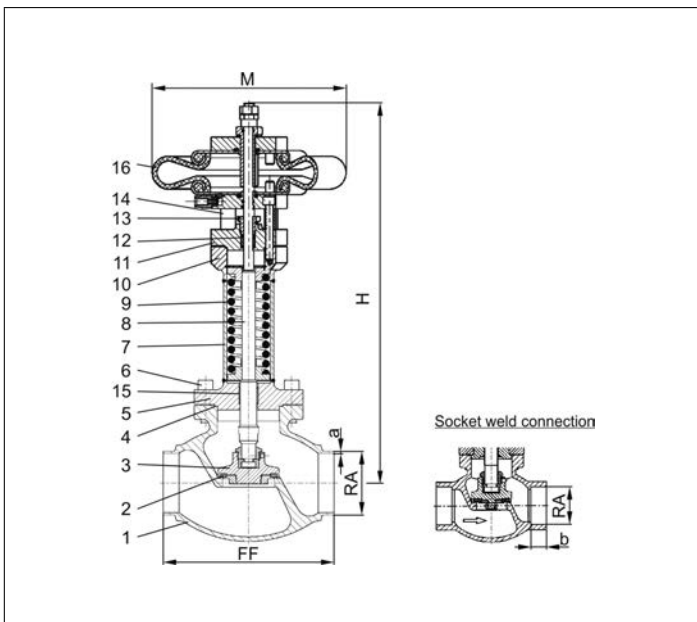

Type 01353 - Standard design	Technical data								
Nominal size	DN	20	20	25	40	40	50	65	80
Dimension code	.X.	2021	2026	2533	4042	4048	5060	657x	8088
Face-to-face dimension	FF	100	100	115	130	130	155	205	245
Height	H	395	395	444	441	441	420	470	500
Outside pipe-Ø ISO 1127	RA	21.3	26.9	33.7	42.4	48.3	60.3	76.1	88.9
Wall thickness pipe ISO 1127	a	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2
Outside pipe-Ø ASTM A312	RA	21.34	26.67	33.40	42.16	48.26	60.33	73.03	88.90
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40							
Socket depth	b	10	10	13	13	13	16	16	16
Actuator-Ø	M	229	229	229	229	229	229	229	229
Weight	ca. kg	7.2	7.2	9.1	10.5	10.5	14.5	17.4	22.5
Kvs-Value	m³/h	4.3	4.3	11.5	22.6	22.6	37.1	71.1	104.0
Cv-Value	gal/min	5.0	5.0	13.4	23.9	26.3	43.2	82.7	120.9
Stroke	mm	10	10	9	11	11	15	23	23
Δ P max	bar	50	50	50	16	16	10	3	4
Δ P max with special spring	bar	-	-	-	31	31	18	10	-

Dimensions in mm.

Actuated Valves and Actuators

Type 09343 - Actuated Gate Valve



Cryogenic-Gate Valves with Pneumatic Actuator, PN50

air pressure for operation 4.0 bar g (maximal 10.0 bar g), push-in connection 8mm

Stainless steel body and topwork,

Actuator - air opens, spring closes

one way tightening (in flow direction),

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Test pressure: 5 - 50 bar, Leakage rate A acc. to DIN EN 12266

Test pressure: 0.7 - 4.9 bar, Leakage rate B acc. to DIN EN 12266

Part No. 09343.X.T02*

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 09343.X.T024

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Further pipe wall thicknesses
- Weather protection hood

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.


Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Ambient temperature actuator: -50°C / -58°F (223K) up to +70°C / +158°F (343K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Wedge	1.4308	A 351 CF8
5 Stem	1.4301	A 276 Grade 304
6 Bonnet gasket	PTFE	
7 Headpiece	1.4308	A 351 CF8
8 Bolts	1.4301/A2	A 194 B8
9 Elongation tube	1.4541	A 213 TP 321
10 Spring	1.4571	A 313 Grade 316Ti
11 Flange	1.4301	A 276 Grade 304
12 Headpiece	1.4301	A 276 Grade 304
13 Gland packing	Graphite / PTFE	
14 Gland nut	1.4305	A 276 Grade 303
15 Pillars	1.4301	A 276 Grade 304
16 Bush	CW452K	B 159 UNS C51900
17 Actuator	Rubberchuk	

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

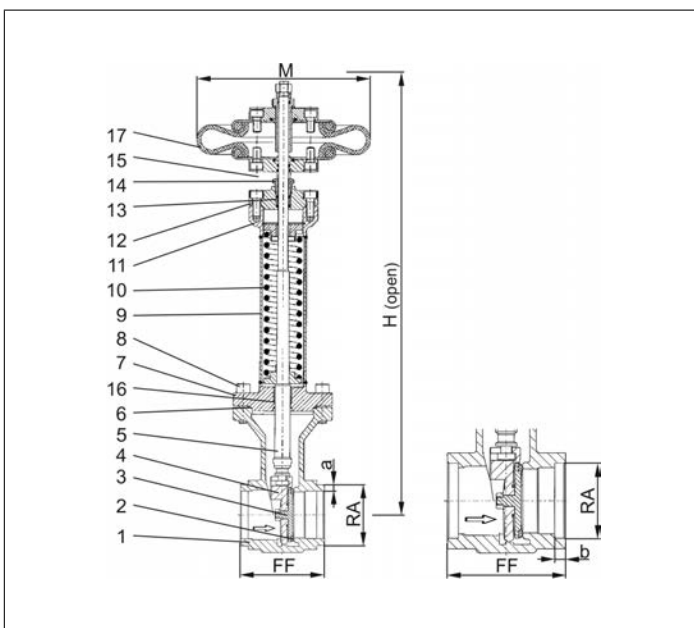

Type 09343 - Standard design	Technical data						
Nominal size	DN	25	40	50	65	80	100
Dimension code	.X.	2533	4048	5060	657x	8088	0114
Face-to-face dimension	FF	133	133	110	110	110	130
Height	H	500	560	590	630	650	880
Outside pipe-Ø ISO 1127	RA	33.7	48.3	60.3	76.1	88.9	114.3
Wall thickness pipe ISO 1127	a	2.6	2.0	2.0	2.6	3.2	3.2
Outside pipe-Ø ASTM A312	RA	33.4	48.26	60.33	73.03	88.90	114.30
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40					
Socket depth	b	8	13	16	16	16	20
Actuator-Ø	M	229	229	229	229	229	229
Weight	ca. kg	9.9	11.1	13.5	14.9	17.5	30.2
Kvs-Value	m ³ /h	43	93	125	283	310	792
Cv-Value	gal/min	51	111	149	337	369	943

Dimensions in mm.

Actuated Valves and Actuators

Type 09443 - Actuated Gate Valve



Cryogenic-Gate Valves with Pneumatic Actuator, PN50

air pressure for operation 4.0 bar g (maximal 10.0 bar g),

Stainless steel body and topwork,

Actuator - air opens, spring closes

one way tightening (in flow direction),

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Test pressure: 5 - 50 bar, Leakage rate A acc. to DIN EN 12266

Test pressure: 0.7 - 4.9 bar, Leakage rate B acc. to DIN EN 12266

Part No. 09443.X.T021

Male thread for union connection

Available options - on request only:

· Weather protection hood

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.


Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Ambient temperature actuator: -50°C / -58°F (223K) up to +70°C / +158°F (343K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW452K	B 159 UNS C51900
4 Wedge	1.4308	A 351 CF8
5 Stem	1.4301	A 276 Grade 304
6 Bonnet gasket	PTFE	
7 Headpiece	1.4301	A 276 Grade 304
8 Bolts	1.4301/A2	A 194 B8
9 Elongation tube	1.4541	A 213 TP 321
10 Spring	1.4571	A 313 Grade 316Ti
11 Flange	1.4301	A 276 Grade 304
12 Headpiece	1.4301	A 276 Grade 304
13 Gland packing	Graphite / PTFE	
14 Gland nut	1.4305	A 276 Grade 303
15 Pillars	1.4301	A 276 Grade 304
16 Bush	CW452K	B 159 UNS C51900
17 Actuator	Rubberchuk	

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

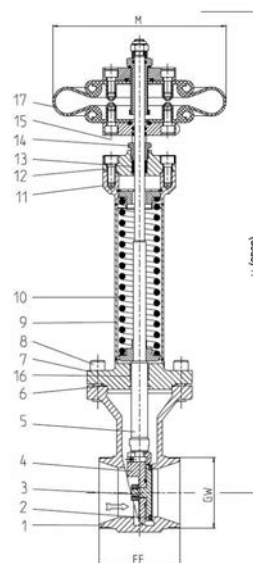

Type 09443 - Standard design	Technical data				
Nominal size	DN	25	40	50	65
Dimension code	.X.	0250	0400	0500	0650
Thread (G- / M-thread)	GW	- / M40x2	G2 / M65x2	G2-1/2 / M78x2	G3 / M88x2
Face-to-face dimension	FF	133	133	110	110
Height	H	500	560	590	630
Actuator-Ø	M	229	229	229	229
Weight	ca. kg	9.9	11.1	13.5	14.9
Kvs-Value	m³/h	43	93	125	283
Cv-Value	gal/min	51	111	149	337

Dimensions in mm.

Accessories for Actuated Valves

Type 40060 - Solenoid Valve



3/2 way Solenoid Valve

direct acting solenoid valve DN3, fast acting, body in brass, protecting class IP65, with cable plug for cable-Ø7 mm, circuit function: power free - outlet balanced, Pressure range 0 - 10.0 bar, Voltage tolerance $\pm 10\%$, with flat seal and fixing screw

Port connection 1/4" G (BSPP) thread: X= 0

Port connection 1/4" NPT thread: X= 6

Version with NBR sealing

for neutral medium like air and water

Medium temperature: 0°C / 32°F up to +80°C / 176°F

Ambient temperature: 0°C / 32°F up to max. +55°C / 131°F

Part No. 40060.020X.C24A000 - Operating voltage 24V, AC (50Hz)

Part No. 40060.020X.C11A000 - Operating voltage 110V, AC (50Hz)

Part No. 40060.020X.C23A000 - Operating voltage 230V, AC (50Hz)

Part No. 40060.020X.C24D000 - Operating voltage 24V, DC

Part No. 40060.020X.C48D000 - Operating voltage 48V, DC

Version with EPDM sealing

for oil and fat-free medium

Medium temperature: -30°C / -22°F up to +90°C / 194°F

Ambient temperature: -30°C / -22°F up to max. +55°C / 131°F

Part No. 40060.020X.C24A00E - Operating voltage 24V, AC (50Hz)

Part No. 40060.020X.C11A00E - Operating voltage 110V, AC (50Hz)

Part No. 40060.020X.C23A00E - Operating voltage 230V, AC (50Hz)

Part No. 40060.020X.C24D00E - Operating voltage 24V, DC

Part No. 40060.020X.C48D00E - Operating voltage 48V, DC

Version with FKM sealing

for neutral medium like air and water

Medium temperature: 0°C / 32°F up to +90°C / 194°F

Ambient temperature: 0°C / 32°F up to max. +55°C / 131°F

Part No. 40060.020X.C24A0AF - Operating voltage 24V, AC (50Hz)

Part No. 40060.020X.C11A0AF - Operating voltage 110V, AC (50Hz)

Part No. 40060.020X.C23A0AF - Operating voltage 230V, AC (50Hz)

Part No. 40060.020X.C24D0AF - Operating voltage 24V, DC

Part No. 40060.020X.C48D0AF - Operating voltage 48V, DC

Version with FKM sealing, cleaned and degreased, suitable for oxygen

Part No. 40060.020X.C24AO2F - Operating voltage 24V, AC (50Hz)

Part No. 40060.020X.C11AO2F - Operating voltage 110V, AC (50Hz)

Part No. 40060.020X.C23AO2F - Operating voltage 230V, AC (50Hz)

Part No. 40060.020X.C24DO2F - Operating voltage 24V, DC

Part No. 40060.020X.C48DO2F - Operating voltage 48V, DC

Available options - on request only:

- other port connection (G1/8), body and seat material 1.4401
- circuit functions: power free - outlet pressure loaded

Standard
version



Accessories for Actuated Valves

Type 41060 - Solenoid Valve



3/2 way Solenoid Valve, including fixing accessories

direct acting solenoid valve DN3, fast acting, body in brass, protecting class IP65, with cable plug for cable-Ø7 mm, circuit function: power free - outlet balanced, Pressure range 0 - 10.0 bar, Voltage tolerance $\pm 10\%$, with flat seal and fixing screw

Version with NBR sealing

port connections G (BSPP) 1/4 female thread, for neutral medium like air and water

Medium temperature: 0°C / 32°F up to +80°C / 176°F

Ambient temperature: 0°C / 32°F up to max. +55°C / 131°F

for actuators type 27511 and 27521

Part No. 41060.0200.C24A000 - Operating voltage 24V, AC (50Hz)

Part No. 41060.0200.C11A000 - Operating voltage 110V, AC (50Hz)

Part No. 41060.0200.C23A000 - Operating voltage 230V, AC (50Hz)

Part No. 41060.0200.C24D000 - Operating voltage 24V, DC

Part No. 41060.0200.C48D000 - Operating voltage 48V, DC

for actuators type 27512 and 27522

Part No. 41060.0210.C24A000 - Operating voltage 24V, AC (50Hz)

Part No. 41060.0210.C11A000 - Operating voltage 110V, AC (50Hz)

Part No. 41060.0210.C23A000 - Operating voltage 230V, AC (50Hz)

Part No. 41060.0210.C24D000 - Operating voltage 24V, DC

Part No. 41060.0210.C48D000 - Operating voltage 48V, DC

for actuators type 27514

Part No. 41060.0220.C24A000 - Operating voltage 24V, AC (50Hz)

Part No. 41060.0220.C11A000 - Operating voltage 110V, AC (50Hz)

Part No. 41060.0220.C23A000 - Operating voltage 230V, AC (50Hz)

Part No. 41060.0220.C24D000 - Operating voltage 24V, DC

Part No. 41060.0220.C48D000 - Operating voltage 48V, DC

for actuators type 27515

Part No. 41060.0230.C24A000 - Operating voltage 24V, AC (50Hz)

Part No. 41060.0230.C11A000 - Operating voltage 110V, AC (50Hz)

Part No. 41060.0230.C23A000 - Operating voltage 230V, AC (50Hz)

Part No. 41060.0230.C24D000 - Operating voltage 24V, DC

Part No. 41060.0230.C48D000 - Operating voltage 48V, DC

Version with EPDM sealing

port connections G (BSPP) 1/4 female thread, for oil- / degrease-free medium

Medium temperature: -30°C / -22°F up to +90°C / 194°F

Ambient temperature: -30°C / -22°F up to max. +55°C / 131°F

for actuators type 27511 and 27521

Part No. 41060.0200.C23A00E - Operating voltage 230V, AC (50Hz)

Part No. 41060.0200.C24D00E - Operating voltage 24V, DC

for actuators type 27512 and 27522

Part No. 41060.0210.C23A00E - Operating voltage 230V, AC (50Hz)

Part No. 41060.0210.C24D00E - Operating voltage 24V, DC

for actuators type 27514

Part No. 41060.0220.C23A00E - Operating voltage 230V, AC (50Hz)

Part No. 41060.0220.C24D00E - Operating voltage 24V, DC

for actuators type 27515

Part No. 41060.0230.C23A00E - Operating voltage 230V, AC (50Hz)

Part No. 41060.0230.C24D00E - Operating voltage 24V, DC

Available options - on request only:

- other port connections (1/4"NPT, G1/8), body and seat material 1.4401
- circuit functions: power free - outlet pressure loaded

Standard
version



Accessories for Actuated Valves

Type 41060 - Solenoid Valve, suitable for oxygen



3/2 way Solenoid Valve, including fixing accessories

direct acting solenoid valve DN3, fast acting, body in brass, protecting class IP65, with cable plug for cable-Ø7 mm, circuit function: power free - outlet balanced, Pressure range 0 - 10.0 bar, Voltage tolerance $\pm 10\%$, with flat seal and fixing screw

Version with FKM sealing, cleaned and degreased, suitable for oxygen

port connections G (BSPP) 1/4 female thread, for neutral medium like air and water

Medium temperature: 0°C / 32°F up to +90°C / 194°F

Ambient temperature: 0°C / 32°F up to max. +55°C / 131°F

for actuators type 27511 and 27521

Part No. 41060.0200.C24AO2F - Operating voltage 24V, AC (50Hz)

Part No. 41060.0200.C23AO2F - Operating voltage 230V, AC (50Hz)

Part No. 41060.0200.C24DO2F - Operating voltage 24V, DC

for actuators type 27512 and 27522

Part No. 41060.0210.C24AO2F - Operating voltage 24V, AC (50Hz)

Part No. 41060.0210.C23AO2F - Operating voltage 230V, AC (50Hz)

Part No. 41060.0210.C24DO2F - Operating voltage 24V, DC

for actuators type 27514

Part No. 41060.0220.C24AO2F - Operating voltage 24V, AC (50Hz)

Part No. 41060.0220.C23AO2F - Operating voltage 230V, AC (50Hz)

Part No. 41060.0220.C24DO2F - Operating voltage 24V, DC

for actuators type 27515

Part No. 41060.0230.C24AO2F - Operating voltage 24V, AC (50Hz)

Part No. 41060.0230.C23AO2F - Operating voltage 230V, AC (50Hz)

Part No. 41060.0230.C24DO2F - Operating voltage 24V, DC

Standard version



Available options - on request only:

- other port connections (1/4"NPT, G1/8)
- circuit functions: power free - outlet pressure loaded

Accessories for Actuated Valves

Type 40061 - Solenoid Valve EEx



3/2 way Solenoid Valve, EEx-protected

direct acting solenoid valve DN3, fast acting, body in brass, protecting class IP65,
EPS 16 ATEX 1 111X; II 2 G Ex mb IIC T 4 Gb; II 2 D EX mb IIC T130° Db
with cable 3 x 0,75 mm², circuit function: power free - outlet balanced,
Pressure range 0 - 10.0 bar, Voltage tolerance $\pm 10\%$, semi time-lag fuse acc. to nominal voltage

UC = universal current (universal control voltage)

Port connection 1/4" G (BSPP) thread: X= 0

Port connection 1/4" NPT thread: X= 6

Version with NBR sealing

port connections G (BSPP) 1/4 female thread, for neutral medium like air and water

Medium temperature: 0°C / 32°F up to +80°C / 176°F

Ambient temperature: 0°C / 32°F up to max. +55°C / 131°F

Part No. 400611020X.C024030 - Operating voltage 24V, UC, with 3 meter cable

Part No. 400611020X.C024100 - Operating voltage 24V, UC, with 10 meter cable

Part No. 400611020X.C230030 - Operating voltage 230V, UC, with 3 meter cable

Part No. 400611020X.C11A030 - Operating voltage 110V, AC (50 Hz), with 3 meter cable

EEx-protected
version



Available options - on request only:

- other port connections (G1/8), body and seat material 1.4401
- circuit functions: power free - outlet pressure loaded



Accessories for Actuated Valves

Type 41061 - Solenoid Valve EEx



3/2 way Solenoid Valve, EEx-protected, including fixing accessories

direct acting solenoid valve DN3, fast acting, body in brass, protecting class IP65,
EPS 16 ATEX 1 111X; II 2 G Ex mb IIC T 4 Gb; II 2 D EX mb IIIC T130° Db
with cable 3 x 0,75 mm² - cable 3 meter long, circuit function: power free - outlet balanced,
Pressure range 0 - 10.0 bar, Voltage tolerance ±10%, semi time-lag fuse acc. to nominal voltage

Version with NBR sealing

port connections G (BSPP) 1/4 female thread, for neutral medium like air and water

Medium temperature: 0°C / 32°F up to +80°C / 176°F

Ambient temperature: 0°C / 32°F up to max. +55°C / 131°F

for actuators type 27511 and 27521

Part No. 4106110200.C024030 - Operating voltage 24V, UC, with 3 meter cable

Part No. 4106110200.C024100 - Operating voltage 24V, UC, with 10 meter cable

Part No. 4106110200.C230030 - Operating voltage 230V, UC, with 3 meter cable

for actuators type 27512 and 27522

Part No. 4106110210.C024030 - Operating voltage 24V, UC, with 3 meter cable

Part No. 4106110210.C024100 - Operating voltage 24V, UC, with 10 meter cable

Part No. 4106110210.C230030 - Operating voltage 230V, UC, with 3 meter cable

for actuators type 27514

Part No. 4106110220.C024030 - Operating voltage 24V, UC, with 3 meter cable

Part No. 4106110220.C024100 - Operating voltage 24V, UC, with 10 meter cable

Part No. 4106110220.C230030 - Operating voltage 230V, UC, with 3 meter cable

for actuators type 27515

Part No. 4106110230.C024030 - Operating voltage 24V, UC, with 3 meter cable

Part No. 4106110230.C024100 - Operating voltage 24V, UC, with 10 meter cable

Part No. 4106110230.C230030 - Operating voltage 230V, UC, with 3 meter cable

port connections 1/4" NPT female thread, for neutral medium like air and water

Medium temperature: 0°C / 32°F up to +80°C / 158°F

Ambient temperature: 0°C / 32°F up to max. +55°C / 131°F

for actuators type 27511 and 27521

Part No. 4106110206.C024030 - Operating voltage 24V, UC, with 3 meter cable

Part No. 4106110206.C11A030 - Operating voltage 110V, AC (50 Hz), with 3 meter cable

for actuators type 27512 and 27522

Part No. 4106110216.C024030 - Operating voltage 24V, UC, with 3 meter cable

Part No. 4106110216.C11A030 - Operating voltage 110V, AC (50 Hz), with 3 meter cable

for actuators type 27514

Part No. 4106110226.C024030 - Operating voltage 24V, UC, with 3 meter cable

Part No. 4106110226.C11A030 - Operating voltage 110V, AC (50 Hz), with 3 meter cable

for actuators type 27515

Part No. 4106110236.C024030 - Operating voltage 24V, UC, with 3 meter cable

Part No. 4106110236.C11A030 - Operating voltage 110V, AC (50 Hz), with 3 meter cable

UC = DC and AC

Available options - on request only:

- other port connections (G1/8), body and seat material 1.4401
- circuit functions: power free - outlet pressure loaded

EEx-protected
version



Accessories for Actuated Valves

Type 40070, Type 40071 - Position and Limit Switches



Position and Limit Switches

Limit switch (0/100%) with parallel roller lever and fixing device, quick-break switch,
Max. fuse rating 6A gL/gD D-fuse, Switching frequency 3600/h

Standard version

Protection class IP65 acc. to EN 60529,
Rated operating current/-voltage I_e/U_e: 6A / 400VAC,
3 cable entries M16 x 1.5,
change-over contact with double break (1 break contact/ 1 make contact),
Ambient temperature -20°C / -4°F up to +80°C / 176°F

Part No. 40070.0011.0100100

Standard
version



Position and Limit Switches

Limit switch (0/100%) with parallel roller lever and fixing device, quick-break switch,
Max. fuse rating 5A gG/gN-fuse, Switching frequency 1800/h

EEx-protected version

Protection class IP65 acc. to EN 60529, EEX d IIC T6,
Rated operating current/-voltage I_e/U_e: 5A / 250VAC,
with cable 4 x 0,75 mm²
change-over contact with single break (1 break contact/ 1 make contact),
Ambient temperature -20°C / -4°F up to +60°C / 140°F

Part No. 40071.0012.1322000 - with 3 meter cable

Part No. 40071.0012.1325000 - with 10 meter cable

EEx-protected
version



Available options - on request only:

- overrun limit switch to signal intermediate positions
- other cable length

Accessories for Actuated Valves

Type 41070, Type 41071 - Position and Limit Switches



Position and Limit Switches, including fixing device

Limit switch (0/100%) with parallel roller lever and fixing device, quick-break switch,
Max. fuse rating 6A gL/gD D-fuse, Switching frequency 3600/h

Standard version

for actuators type 27511, 27512, 27521 and 27522

Part No. 41070.0011.0100100

Protection class IP65 acc. to EN 60529,
Rated operating current/-voltage Ie/Ue: 6A / 400VAC,
3 cable entries M16 x 1.5,
change-over contact with double break (1 break contact/ 1 make contact),
Ambient temperature -20°C / -4°F up to +80°C / 176°F

for actuators type 27514 and 27515

Part No. 41370.0011.0100100

Protection class IP65 acc. to EN 60529,
Rated operating current/-voltage Ie/Ue: 6A / 400VAC,
3 cable entries M16 x 1.5,
change-over contact with double break (1 break contact/ 1 make contact),
Ambient temperature -20°C / -4°F up to +80°C / 176°F



Standard
version

Position and Limit Switches

Limit switch (0/100%) with parallel roller lever and fixing device, quick-break switch,
Max. fuse rating 5A gG/gN-fuse, Switching frequency 1800/h

EEx-protected version

for actuators type 27511, 27512, 27521 and 27522

Part No. 41071.0012.1322000

Protection class IP65 acc. to EN 60529, EEX d IIC T6,
Rated operating current/-voltage Ie/Ue: 5A / 250VAC,
with cable 4 x 0,75 mm² - cable 3 meter long,
change-over contact with single break (1 break contact/ 1 make contact),
Ambient temperature -20°C / -4°F up to +60°C / 140°F

for actuators type 27514 and 27515

Part No. 41371.0012.1322000

Protection class IP65 acc. to EN 60529, EEX d IIC T6,
Rated operating current/-voltage Ie/Ue: 5A / 250VAC,
with cable 4 x 0,75 mm² - cable 3 meter long,
change-over contact with single break (1 break contact/ 1 make contact),
Ambient temperature -20°C / -4°F up to +60°C / 140°F



EEx-protected
version

Available options - on request only:

- overrun limit switch to signal intermediate positions
- other cable length

Accessories for Actuated Valves

Type 40080 - Inductive Proximity Switches



Inductive proximity switches

Functions: inductive, Switching element function NAMUR NC, Output polarity NAMUR,
Rated operating distance 2 mm, Assured operating distance 0 - 1.62 mm, Installation embeddable,
Nominal voltage 8.2V, Switch frequency 0 - 1000 Hz, Short-circuit and reverse polarity protection,
Protecting class IP66/ IP67 acc. to EN 60529, EEX ia IIC T6
Indication of the switching state all direction LED yellow, with cable 2m x 0.34 mm²
Ambient temperature: -25°C / -13°F up to +70°C / 158°F

Part No. 40080.1235.0A20100 - with 2 meter cable

Part No. 40080.1235.0A20400 - with 10 meter cable

Part No. 40080.1235.0A20700 - with 25 meter cable



Functions: inductive, Switching element function PNP closer, Output polarity DC,
Rated operating distance 2 mm, Assured operating distance 0 - 1.62 mm, Installation embeddable,
Nominal voltage 10 - 60V, Switch frequency 0 - 3000 Hz, Short-circuit and reverse polarity protection,
Protecting class IP66/ IP67 acc. to EN 60529
Indication of the switching state all direction LED yellow, with appliance inlet M12 x 1 - 4 pole
Ambient temperature: -25°C / -13°F up to +70°C / 158°F

Part No. 4008011240.0B10100 - with 2 meter cable

Induktive sensor: NCB2-12GM40-Z0

Functions: inductive, Switching element function DC closer, Output polarity DC,
Rated operating distance 2 mm, Assured operating distance 0 - 1.62 mm, Installation embeddable,
Nominal voltage 5 - 60V, Switch frequency 0 - 800 Hz, Short-circuit clocking,
Protecting class IP66/ IP67 acc. to EN 60529
Indication of the switching state all direction LED yellow, with cable 2m x 0.14 mm²
Ambient temperature: -25°C / -13°F up to +70°C / 158°F

Part No. 40080.1240.0C10100 - with 2 meter cable

Available options - on request only:

- Other cable length
- Adapter for manual operated valves



Accessories for Actuated Valves

Type 41080 - Inductive Proximity Switches



Inductive proximity switches, including fixing device

Functions: inductive, Switching element function NAMUR NC, Output polarity NAMUR,
Rated operating distance 2 mm, Assured operating distance 0 - 1.62 mm, Installation embeddable,
Nominal voltage 8.2V, Switch frequency 0 - 1000 Hz, Short-circuit and reverse polarity protection,
Protecting class IP66/ IP67 acc. to EN 60529, EEX ia IIC T6

Indication of the switching state all direction LED yellow, with cable 2m x 0.34 mm²

Ambient temperature: -25°C / -13°F up to +70°C / 158°F

for actuators type 27511, 27512, 27521 and 27522

Part No. 41080.1235.AA20100 (Valve size DN10 - DN150), with 2 meter cable

Part No. 41080.1235.AA20400 (Valve size DN10 - DN150), with 10 meter cable

for actuators type 27514 and 27515

Part No. 41080.1235.BA20100 (Valve size DN10 - DN50), with 2 meter cable

Part No. 41080.1235.BA20400 (Valve size DN10 - DN50), with 10 meter cable

Part No. 41080.1235.CA20100 (Valve size DN65), with 2 meter cable


Part No. 41080.1235.CA20400 (Valve size DN65), with 10 meter cable

Part No. 41080.1235.DA20100 (Valve size DN80 - DN100), with 2 meter cable

Part No. 41080.1235.DA20400 (Valve size DN80 - DN100), with 10 meter cable

Part No. 41080.1235.EA20100 (Valve size DN150), with 2 meter cable

Part No. 41080.1235.EA20400 (Valve size DN150), with 10 meter cable



Functions: inductive, Switching element function PNP closer, Output polarity DC,
Rated operating distance 2 mm, Assured operating distance 0 - 1.62 mm, Installation embeddable,
Nominal voltage 10 - 60V, Switch frequency 0 - 3000 Hz, Short-circuit and reverse polarity protection,
Protecting class IP66/ IP67 acc. to EN 60529

Indication of the switching state all direction LED yellow, with appliance inlet M12 x 1 - 4 pole

Ambient temperature: -25°C / -13°F up to +70°C / 158°F

for actuators type 27511, 27512, 27521 and 27522

Part No. 4108011240.AB10100 (Valve size DN10 - DN150)

for actuators type 27514 and 27515

Part No. 4108011240.BB10100 (Valve size DN10 - DN50)

Part No. 4108011240.CB10100 (Valve size DN65)

Part No. 4108011240.DB10100 (Valve size DN80 - DN100)

Part No. 4108011240.EB10100 (Valve size DN150)

Inductive sensor: NCB2-12GM40-Z0

Functions: inductive, Switching element function DC closer, Output polarity DC,
Rated operating distance 2 mm, Assured operating distance 0 - 1.62 mm, Installation embeddable,
Nominal voltage 5 - 60V, Switch frequency 0 - 800 Hz, Short-circuit clocking,
Protecting class IP66/ IP67 acc. to EN 60529

Indication of the switching state all direction LED yellow, with cable 2m x 0.14 mm² - 2 meter long

Ambient temperature: -25°C / -13°F up to +70°C / 158°F

for actuators type 27511, 27512, 27521 and 27522

Part No. 41080.1240.AC10100 (Valve size DN10 - DN150)

for actuators type 27514 and 27515

Part No. 41080.1240.BC10100 (Valve size DN10 - DN50)

Part No. 41080.1240.CC10100 (Valve size DN65)

Part No. 41080.1240.DC10100 (Valve size DN80 - DN100)

Part No. 41080.1240.EC10100 (Valve size DN150)

Available options - on request only:

· other cable length

Accessories for Actuated Valves

Type 08002 - Air Control Sets

Air Control sets

Diaphragm pressure regulator with secondary ventilation,
Installation position vertical - drain plug at bottom,
Inlet pressure maximal 16.0 bar,
filter element in Polyethylen (sinterted), pore diameter in filter element 5µm,
port connections G1/4, body zinc-diecasting, with NBR seal,
tank capacity maximal 0.35 cm³ condensate, condensate draining manuel,
Ambient temperature: -10°C / 14°F up to +60°C / 140°F,
including pressure gauge (0 - 10.0 bar)

Part No. 08002.021K.0000

condensate tank Polycarbonat, control range 0.5 - 10.0 bar



Condensate-
tank
Polycarbonat

Part No. 08002.021M.0000

condensate tank in metal, control range 0,5 - 16.0 bar



Condensate-
tank
metal


Adapter 1/4" NPT female thread - G1/4 male thread

Part No. 29001.0004.0302

material brass (CW614N / ASTM B 283 UNS C38500)

Part No. 29001.0004.0783

material stainless steel (1.4404 / ASTM 316L))



Accessories for Actuated Valves

Type 08003 - Air Control Sets

Air Control sets, including fixing accessories

Diaphragm pressure regulator with secondary ventilation,
Installation position vertical - drain plug at bottom,
Inlet pressure maximal 16.0 bar,
filter element in Polyethylen (sinterted), pore diameter in filter element 5µm,
port connections G1/4, body zinc-diecasting, with NBR seal,
tank capacity maximal 0.35 cm³ condensate, condensate draining manuel,
Ambient temperature: -10°C / 14°F up to +60°C / 140°F,
including pressure gauge (0 - 10.0 bar)

Part No. 08003.021K.0000

condensate tank Polycarbonat, control range 0.5 - 10.0 bar

Part No. 08003.021M.0000

condensate tank in metal, control range 0,5 - 16.0 bar



Condensate-tank
Polycarbonat



Condensate-tank
metal

High Flow Filter Regulator in stainless steel, including fixing accessories

Installation position vertical - drain plug at bottom,
Inlet pressure maximal 20.0 bar, control range 0.5 - 10.0 bar
filter element in stainless steel (AISI 316), pore diameter in filter element 5µm,
body in stainless steel (AISI 316L), with FPM seal,
condensate draining manuel,
Medium temperature: -60°C / -76°F up to +90°C / 194°F,
Ambient temperature: -60°C / -76°F up to +90°C / 194°F,
including pressure gauge (0 - 10.0 bar)
Approvals: ATEX Zone 1 and 21, SIL2, CU-TR, NACE



Part No. 08003.0200.0F02

port connections G1/4 female thread

Part No. 08003.0206.0F02

port connections 1/4" NPT female thread

Part No. 30803.0200.0F02

Filter (5µm) and O-ring spare part kit for low temperature applications


Adapter 1/4" NPT female thread - G1/4 male thread

Part No. 29001.0004.0302

material brass (CW614N / ASTM B 283 UNS C38500)

Part No. 29001.0004.0783

material stainless steel (1.4404 / ASTM 316L))



Accessories for Actuated Valves

Type 40090 - Electropneumatic Positioner



Electropneumatic positioner for pneumatic Actuator

ATTENTION - operate only with dry, oil-free air acc. to IEC654-2 !

Protecting class IP65 acc. to EN 60529,

Operation: simple, Inlet air pressure: max. 6.0 bar - connection with female thread G1/4

Electrical connection: screw type terminals 2.5 mm², cable gland: M 20 x 1.5

Set point x:

4 - 20 mA with 2 conductor connections

0/4 - 20 mA with 3/4 conductor connections

Auxiliary power with 3/4 conductor connections: UH: 18-30V DC

Internal resistance:

R_i = 500 Ohm (2-wire)

R_i = 50 Ohm (3/4-wire)

Ambient temperature: -30°C / -22°F up to +80°C / 176°F



Part No. 40090.6136.00DA000

standard version (3/4-wire)

Part No. 40090.6136.00DA010

with installed limit indicator, incl. 2nd cable fitting, alarm module; electronic (6DR4004-8A), (3/4-wire)

Part No. 40090.6136.00DA020

with IY-module: 4...20 mA check-back signal (3/4-wire)

Part No. 40090.6136.00EA000

with Profibus PA connection

Part No. 40090.6136.00FA000

with foundation fieldbus and fixable friction clutch

Part No. 40090.6136.00BA100

with HART connection (2-wire)



Accessories for Actuated Valves

Type 41090 - Electropneumatic Positioner



Electropneumatic positioner for pneumatic Actuator

ATTENTION - operate only with dry, oil-free air acc. to IEC654-2 !

Protecting class IP65 acc. to EN 60529,

Operation: simple, Inlet air pressure: max. 6.0 bar - connection with female thread G1/4

Electrical connection: screw type terminals 2.5 mm², cable gland: M 20 x 1.5

Set point x:

4 - 20 mA with 2 conductor connections

0/4 - 20 mA with 3/4 conductor connections


Auxiliary power with 3/4 conductor connections: UH: 18-30V DC

Internal resistance:

Ri = 500 Ohm (2-wire)

Ri = 50 Ohm (3/4-wire)

Ambient temperature: -30°C / -22°F up to +80°C / 176°F



inclusive fixing device for actuators with lift up to 35.0 mm

for actuators type 27511, 27514 and 27521 (spring to close)

Part No. 41090.6136.00DA000

standard version (3/4-wire)

Part No. 41090.6136.00DA010

with installed limit indicator, incl. 2nd cable fitting, alarm module; electronic (6DR4004-8A), (3/4-wire)

Part No. 41090.6136.00DA020

with IY-module: 4...20 mA check-back signal (3/4-wire)

Part No. 41090.6136.00EA000

with Profibus PA connection

Part No. 41090.6136.00FA000

with foundation fieldbus and fixable friction clutch

Part No. 41090.6136.00BA100

with HART connection (2-wire)

for actuators type 27512, 27515 and 27522 (spring to open)

Part No. 41090.6136.01DA000

standard version (3/4-wire)

Part No. 41090.6136.01DA010

with installed limit indicator, incl. 2nd cable fitting, alarm module; electronic (6DR4004-8A), (3/4-wire)

Part No. 41090.6136.01DA020

with IY-module: 4...20 mA check-back signal (3/4-wire)

Part No. 41090.6136.01EA000

with Profibus PA connection

Part No. 41090.6136.01FA000

with foundation fieldbus and fixable friction clutch

Part No. 41090.6136.01BA100

with HART connection (2-wire)

inclusive fixing device for actuators with lift from 35.0 mm up to 130.0 mm

for actuators type Typ 27511, 27512, 27514, 27515, 27521 and 27522

Part No. 41090.6136.12DA000

standard version (3/4-wire)

Part No. 41090.6136.12DA010

with installed limit indicator, incl. 2nd cable fitting, alarm module; electronic (6DR4004-8A), (3/4-wire)

Part No. 41090.6136.12DA020

with IY-module: 4...20 mA check-back signal (3/4-wire)

Part No. 41090.6136.12EA000

with Profibus PA connection

Part No. 41090.6136.12FA000

with foundation fieldbus and fixable friction clutch

Part No. 41090.6136.12BA100

with HART connection (2-wire)

Accessories for Actuated Valves

Type 40091 - Electropneumatic Positioner EEx



Electropneumatic positioner for pneumatic Actuator

ATTENTION - operate only with dry, oil-free air acc. to IEC654-2 !

Protecting class IP65 acc. to EN 60529, with EEx-protection: II 2 G EEx ia IIC T6

Operation: simple, Inlet air pressure: max. 6.0 bar - connection with female thread G1/4

Electrical connection: screw type terminals 2.5 mm², cable gland: M 20 x 1.5

Set point x:

4 - 20 mA with 2 conductor connections

Internal resistance:

R_i = 500 Ohm (2-wire)

Ambient temperature: -30°C / -22°F up to +50°C / 122°F

Part No. 40091.6136.00AA000

standard version - 2 wire connection

Part No. 40091.6136.00AA020

with IY-module: 4...20 mA check-back signal (2-wire)

Part No. 40091.6136.00EA000

with Profibus PA connection



Accessories for Actuated Valves

Type 41091 - Electropneumatic Positioner EEx



Electropneumatic positioner for pneumatic Actuator

ATTENTION - operate only with dry, oil-free air acc. to IEC654-2 !

Protecting class IP65 acc. to EN 60529, with EEx-protection: II 2 G EEx ia IIC T6

Operation: simple, Inlet air pressure: max. 6.0 bar - connection with female thread G1/4

Electrical connection: screw type terminals 2.5 mm², cable gland: M 20 x 1.5

Set point x:

4 - 20 mA with 2 conductor connections

Internal resistance:

R_i = 500 Ohm (2-wire)

Ambient temperature: -30°C / -22°F up to +50°C / 122°F

inclusive fixing device for actuators with lift up to 35.0 mm

for actuators type 27511, 27514 and 27521 (spring to close)

Part No. 41091.6136.00AA000

standard version - 2 wire connection

Part No. 41091.6136.00AA020

with IY-module: 4...20 mA check-back signal (2-wire)

Part No. 41091.6136.00EA000

with Profibus PA connection

for actuators type 27512, 27515 and 27522 (Feder öffnet)

Part No. 41091.6136.01AA000


standard version - 2 wire connection

Part No. 41091.6136.01AA020

with IY-module: 4...20 mA check-back signal (2-wire)

Part No. 41091.6136.01EA000

with Profibus PA connection



inclusive fixing device for actuators with lift from 35.0 mm up to 130.0 mm

for actuators type 27511, 27512, 27514, 27515, 27521 and 27522

Part No. 41091.6136.12AA000

standard version - 2 wire connection

Part No. 41091.6136.12AA020

with IY-module: 4...20 mA check-back signal (2-wire)

Part No. 41091.6136.12EA000

with Profibus PA connection



Accessories for Actuated Valves

Type 40090 - Pneumatic Positioner

Pneumatic positioner for pneumatic Actuator

ATTENTION - operate only with dry, oil-free air acc. to IEC654-2 !
Protecting class IP54 acc. to EN 60529,


Part No. 40090.0981.00NB200

Operation: simple, Inlet air pressure: max. 6.0 bar

Independent adjustment of stroke range and zero,

Signal range 0.2 - 1.0 bar or split range down to Δw 0.2 bar,
adjustable amplification and damping,

Ambient temperature: -40°C / -40°F up to +80°C / 176°F



Accessories for Actuated Valves

Type 41090 - Pneumatic Positioner

Pneumatic positioner for pneumatic Actuator, including fixing device

ATTENTION - operate only with dry, oil-free air acc. to IEC654-2 !

Protecting class IP54 acc. to EN 60529,


Part No. 41090.0981.22NB200

Operation: simple, Inlet air pressure: max. 6.0 bar - connection with female thread G1/8

Independent adjustment of stroke range and zero,

Signal range 0.2 - 1.0 bar or split range down to Δw 0.2 bar,
adjustable amplification and damping,

Ambient temperature: -40°C / -40°F up to +80°C / 176°F



Accessories for Actuated Valves

Type 40281 - Inductive Proximity Switches EEx-Box



Inductive Proximity Switches - EEx-protected

Functions: inductive, Switching element function NAMUR Opener, Output polarity NAMUR, Rated operating distance 5mm, Nominal voltage 8V DC, Switch frequency 0 - 3000Hz, until SIL2 acc. to IEC 61508 suitable, protecting class IP67 acc. to EN 60529, EEX ia IIC T6
Bracket, shaft and screws made of stainless steel SS316

Working temperature: -40°C / -40°F (233K) up to +80°C / +176°F (353K)

Dimensions (width x height x depth): 8 x 15 x 7 cm

Part No. 40281.1114.0A300A0

with cable gland M20, made of plastic, WAGO terminal block
with universal limit switch box ATEX EexialICT6 made of plastic IP67
with 2 x switches (P+F NJ5-11-NG)

Part No. 40281.1114.0A500A0

with 2 cable glands M20, made of plastic, WAGO terminal block
with universal limit switch box ATEX EexialICT6 made of plastic IP67
with 2 x switches (P+F NJ5-11-NG)

Special equipment with limit switch box made of aluminium

Part No. 40281.1114.0A400B0

with cable gland M20, made of brass, nickel plated, WAGO terminal block
with universal limit switch box ATEX EexialICT6 made of aluminium IP67
with 2 x switches (P+F NJ5-11-NG)

Part No. 40281.1114.0A600B0

with cable gland 1/2" NPT, made of plastic, WAGO terminal block
with universal limit switch box ATEX EexialICT6 made of aluminium IP67
with 2 x switches (P+F NJ5-11-NG)



Accessories for Actuated Valves

Type 41281 - Inductive Proximity Switches EEx-Box



Inductive Proximity Switches - EEx-protected, including fixing device

Functions: inductive, Switching element function NAMUR Opener, Output polarity NAMUR, Rated operating distance 5mm, Nominal voltage 8V DC, Switch frequency 0 - 3000Hz, until SIL2 acc. to IEC 61508 suitable, protecting class IP67 acc. to EN 60529, EEX ia IIC T6 Bracket, shaft and screws made of stainless steel SS316

Working temperature: -40°C / -40°F (233K) up to +80°C / +176°F (353K)

Dimensions (width x height x depth): 8 x 15 x 7 cm (without bracket)

Part No. 41281.1114.FA300A0

with cable gland M20, made of plastic, WAGO terminal block
with universal limit switch box ATEX EexialICT6 made of plastic IP67
with 2 x switches (P+F NJ5-11-NG)
including bracket for pneumatic actuator DN10 - DN150

Part No. 41281.1114.FA500A0

with 2 cable glands M20, made of plastic, WAGO terminal block
with universal limit switch box ATEX EexialICT6 made of plastic IP67
with 2 x switches (P+F NJ5-11-NG)
including bracket for pneumatic actuator DN10 - DN150

Part No. 41281.1114.GA300A0

with cable gland M20, made of plastic, WAGO terminal block
with universal limit switch box ATEX EexialICT6 made of plastic IP67
with 2 x switches (P+F NJ5-11-NG)
including bracket for Firestoneactuator (rubber bellow) for stroke up to 40mm

Special equipment with limit switch box made of aluminium

Part No. 41281.1114.FA400B0

with cable gland M20, made of brass, nickel plated, WAGO terminal block
with universal limit switch box ATEX EexialICT6 made of aluminium IP67
with 2 x switches (P+F NJ5-11-NG)
including bracket for pneumatic actuator DN10 - DN150

Part No. 41281.1114.FA600B0

with cable gland 1/2" NPT, made of plastic, WAGO terminal block
with universal limit switch box ATEX EexialICT6 made of aluminium IP67
with 2 x switches (P+F NJ5-11-NG)
including bracket for pneumatic actuator DN10 - DN150



Accessories for Actuated Valves

Type 55177 - Weather protection hood




Weather protection hood
to protect valves against weather-related damage
suitable for valves with rubber actuators (DN15-DN80)

Part No. 55177.0107.0767
suitable for the following types of valves:
- 01353, 01653, 01753, 01853
- 09343, 09443



Materials		DIN EN	ASTM
1	Hood	1.4571	316Ti
2	Nut	1.4301	8

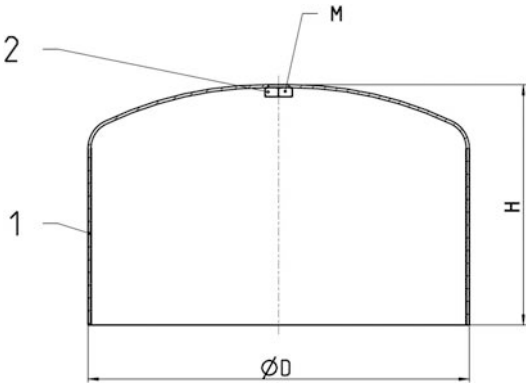

Type 55177		Technical Data	
Part No.		55177.0107.0767	
Thread	M		M12
Height	H		160
Diameter	D		254
Weight	ca. kg		2,5

Dimensions in mm.

Accessories for Actuated Valves

Type 74394 - Bracket for accessories



Bracket for accessories

for Cryogenic-Gate Valves with Pneumatic Actuator



Part No. 74394.0005.0783

for Inductive Proximity Switches
and Position and Limit Switches

Stroke: 1.0 - 40.0mm

Globe valves until DN80

Gate valves until DN40

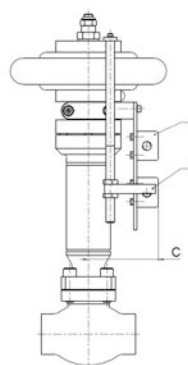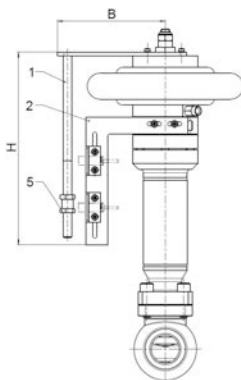




Part No. 74394.0008.0783

for Inductive Proximity Switches
and Position and Limit Switches

Stroke: 40.1 - 100.0mm

Globe valves from DN100

Gate valves from DN50

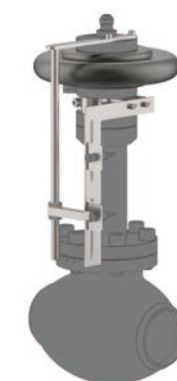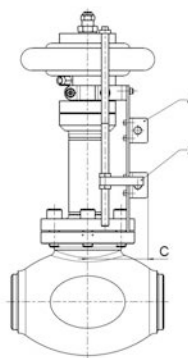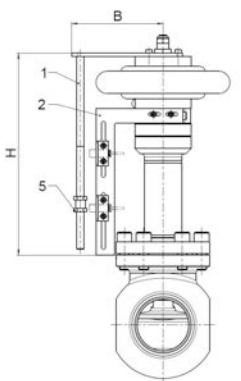



Part No. 74394.0010.0783

for Inductive Proximity Switches EEx-Box

Stroke: 1.0 - 40.0mm

Globe valves until DN80

Gate valves until DN40

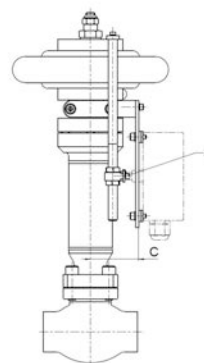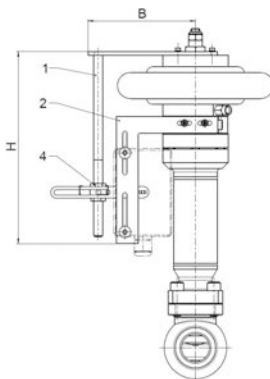

Materials	DIN EN	ASTM
1 Bracket	1.4404	A 276 Grade 316L
2 Angle	1.4404	A 276 Grade 316L
3 Stopper	1.4571/ 1.4404	A 276 Grade 316Ti/ A 276 Grade 316L
4 Bracket	1.4404	A 276 Grade 316L
5 Nut	1.4571/A4	A 194 Grade 8M

For use with the following accessories:

- Type 40070, 40071 - Position and Limit Switches
- Type 40080 - Inductive Proximity Switches
- Type 40281 - Inductive Proximity Switches EEx-Box

Typ 74394	Technical Data			
Part Number		74394.0005.0783	74394.0008.0783	74394.0010.0783
Length	B	147.5	147.5	150.0
Height	H	266	326	265
Length	C	96.7	96.7	66.5
Weight	ca. kg	1.2	1.3	0.7

Dimensions in mm.

Spare Parts for Actuated Valves

Type 29343 - Topwork with pneumatic actuator



for Cryogenic-Gate Valves with Pneumatic Actuator

air pressure for operation 4,0 bar g (maximal 10,0 bar g), push-in connection 8mm

Stainless steel topwork,

Actuator - air opens, spring closes

one way tightening (in flow direction),

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen


Part No. 29343.X.T020

suitable for:

Type	Nominal size
09343	DN25 - DN100
09443	DN25 - DN65



Materials	DIN EN	ASTM
1 Valve seal	PTFE / Carbon filled (25%)	
2 Disc	CW452K B 159 UNS C51900	
3 Wedge	1.4308	A 351 CF8
4 Stem	1.4301	A 276 Grade 304
5 Bonnet gasket	PTFE	
6 Headpiece	1.4308	A 351 CF8
7 Bolts	1.4301/A2	A 194 B8
8 Elongation tube	1.4541	A 213 TP 321
9 Spring	1.4571	A 313 Grade 316Ti
10 Flange	1.4301	A 276 Grade 304
11 Headpiece	1.4301	A 276 Grade 304
12 Gland packing	Graphite / PTFE	
13 Gland nut	1.4305	A 276 Grade 303
14 Pillars	1.4301	A 276 Grade 304
15 Bush	CW452K B 159 UNS C51900	
16 Actuator	Rubber	

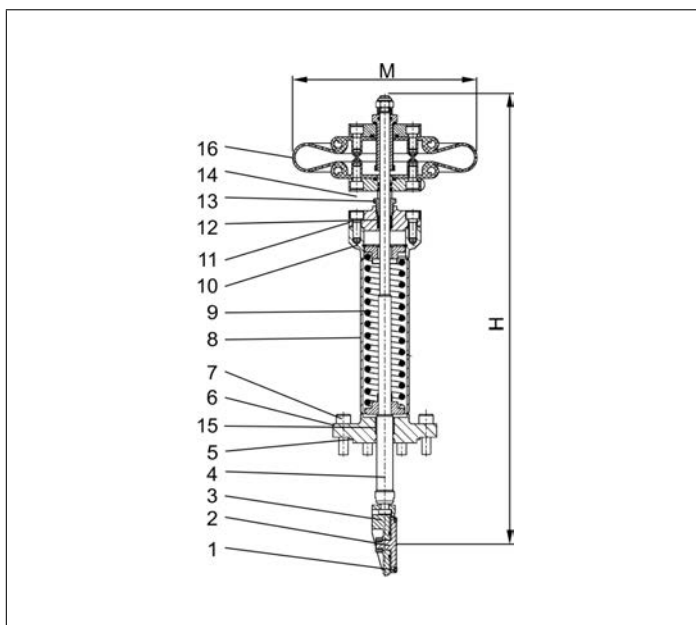

Type 29343.X.T020	Technical data						
Nominal size	DN	25	40	50	65	80	100
Dimension code	.X.	0250	0400	0500	0650	0800	1000
Height	H	500	520	540	560	580	780
Number of bolts		4	4	6	8	6	8
Handwheel-Ø	M	229	229	229	229	229	244
Weight	ca. kg	8.5	8.6	9.6	10.5	11.6	19.0

Dimensions in mm.

Spare Parts for Actuated Valves

Type 30003 - Spare part kit




for Rubber Pneumatic Actuator

"cleaned and degreased for oxygen service"

Part No. 30003.0000.T000

suitable for:

Type	Nominal size
01353	DN20 - DN80
01653	DN20 - DN80
01753	DN20 - DN80
01853	DN20 - DN80
09343	DN25 - DN100
09443	DN25 - DN65

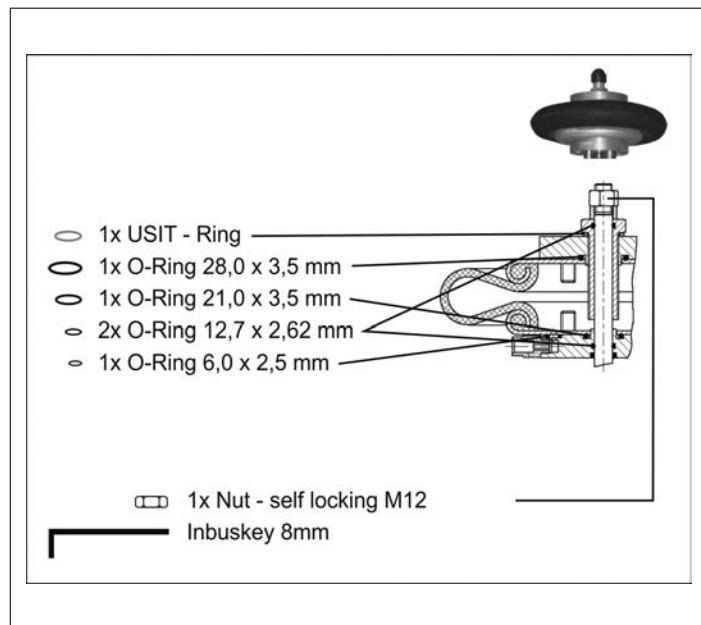

Type 30003.0000.T000	Technical data	
Nominal size	DN	20 - 100
Weight	ca. kg	0.25

Dimensions in mm.

Pressure Regulator

Type 4182-1 - CombiPressure-Regulator



Cryogenic-Pressure Regulator, bronze, PN50

Set point range from 1.0 up to 38.0 bar

Connections: male thread for union connection, BSPP (G) or M thread

Cleaning Standard: "cleaned and degreased for oxygen service" - **for oxygen (O₂) max. 30,0 bar / +60°C / 140°F (333K)**
complete with installed strainer screens - mesh size 0.25 mm - on connection A and B

Part No. 4182-X-1100* Set point range 1.0 up to 12.0 bar
set at 8.0 bar unless otherwise noted on purchase order

Part No. 4182-X-1200* Set point range 6.0 up to 24.0 bar
set at 12.0 bar unless otherwise noted on purchase order

Part No. 4182-X-1300* Set point range 16.0 up to 38.0 bar
set at 20.0 bar unless otherwise noted on purchase order

*connection C: 1 = M thread (cone connection 37°), 2 = BSPP (G) thread (cone connection 60°)

Available options - on request only:

- Further connections
- With check unit type 66044

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +60°C / 140°F (333K)

Ambient temperature: -40°C / -40°F (233K) up to +65°C / 149°F (338K)



Materials	DIN EN	ASTM
1 Body	CC491K	C83600
2 Bonnet (cover)	CC491K	C83600
3 Diaphragm	1.4409	CF3M
4 Supporting ring	1.4301	304
5 Diaphragm ring	1.4301	304
6 Spring plate	1.4301	304
7 Spring	1.4310	313
8 Spring clamp	1.4301	304
9 Locking nut	1.4301	304
10 Set point adjuster	1.4301	304
11 Strainer (option)	CW452K	C51900
12 Valve seal	PTFE	
13 Bellow disc	CW614N	C38500
14 Bellow	1.4571	316Ti
15 Tubular overflow	CW614N	C38500
16 Connection fitting	CC491K	C83600

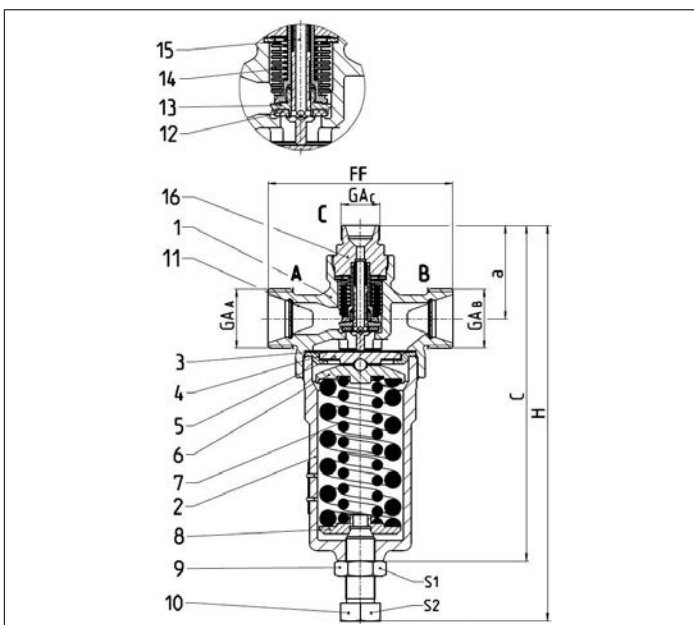

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 4182	Technical data		
Nominal size	DN	20	20
Dimension code	.X.	MM04020	MG12000
Face-to-face dimension	FF	125	125
Height	H	268	268
Thread	GA _A	M40x2.0	G 1-1/4
Thread	GA _B	M40x2.0	G 1-1/4
Thread	GA _C	M26x1.5	G 3/4
Length	a	63	63
Length	c	227	227
Wrench size across flats	S ₁	30	30
Wrench size across flats	S ₂	27	27
Weight	ca. kg	4.3	4.3
Kvs-Value	m ³ /h	1.5	1.5
Cv-Value	gal/min	1.7	1.7

Dimensions in mm.

Essential: Please confirm pressure range and valve set pressure on purchase order

Pressure Regulator

Type 4186-1 - CombiPressure-Regulator



Cryogenic-Pressure Regulator, stainless steel, PN50

Set point range from 1.0 up to 38.0 bar

Connections: male thread for union connection, BSPP (G) or M thread

Cleaning Standard: "cleaned and degreased for oxygen service" - **for oxygen (O₂) max. 30,0 bar / +60°C / 140°F (333K)**
complete with installed strainer screens - mesh size 0.25 mm - on connection A and B

Part No. 4186-X-1100* Set point range 1.0 up to 12.0 bar
set at 8.0 bar unless otherwise noted on purchase order

Part No. 4186-X-1200* Set point range 6.0 up to 24.0 bar
set at 12.0 bar unless otherwise noted on purchase order

Part No. 4186-X-1300* Set point range 16.0 up to 38.0 bar
set at 20.0 bar unless otherwise noted on purchase order

*connection C: 1 = M thread (cone connection 37°), 2 = BSPP (G) thread (cone connection 60°)

Available options - on request only:

- Further connections
- With check unit type 66044

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.


Working temperature: -196°C / -321°F (77K) up to +200°C / 392°F (473K)

Ambient temperature: -40°C / -40°F (233K) up to +65°C / 149°F (338K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Bonnet (cover)	1.4408	A 351 CF8M
3 Diaphragm	1.4404	A 240 Grade 316L
4 Supporting ring	1.4301	A 276 Grade 304
5 Diaphragm ring	1.4301	A 276 Grade 304
6 Spring plate	1.4301	A 276 Grade 304
7 Spring	1.4571	A 313 Grade 316Ti
8 Spring clamp	1.4301	A 276 Grade 304
9 Locking nut	1.4301	A 276 Grade 304
10 Set point adjuster	1.4301	A 240 Grade 304
11 Strainer (option)	1.4301	A 240 Grade 304
12 Valve seal	PTFE	
13 Bellow disc	1.4571	A 276 Grade 316Ti
14 Bellow	1.4571	A 313 Grade 316Ti
15 Bellow spring	1.4571	A 313 Grade 316Ti
16 Connection fitting	1.4571	A 276 Grade 316Ti

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

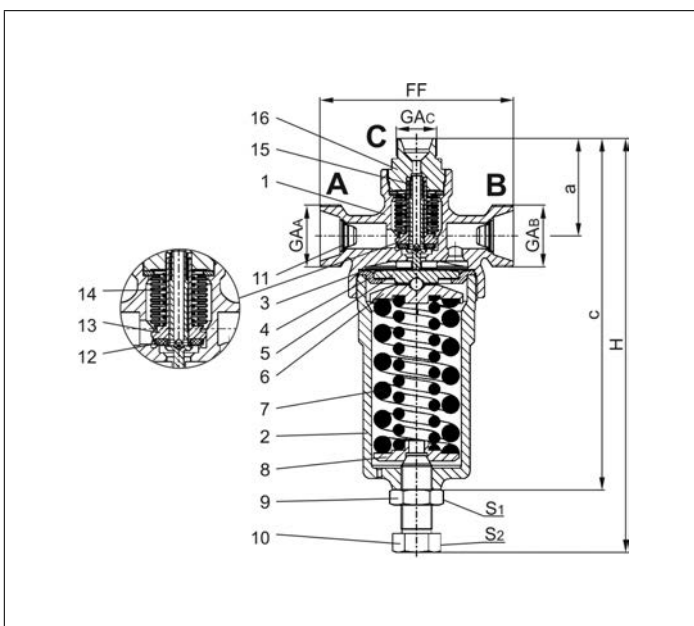

Type 4186	Technical data		
Nominal size	DN	20	20
Dimension code	.X.	MM04020	MG12000
Face-to-face dimension	FF	125	125
Height	H	268	268
Thread	GA _A	M40x2.0	G 1-1/4
Thread	GA _B	M40x2.0	G 1-1/4
Thread	GA _C	M26x1.5	G 3/4
Length	a	63	63
Length	c	227	227
Wrench size across flats	S ₁	30	30
Wrench size across flats	S ₂	27	27
Weight	ca. kg	4.3	4.3
Kvs-Value	m ³ /h	1.2	1.2
Cv-Value	gal/min	1.4	1.4

Dimensions in mm.

Essential: Please confirm pressure range and valve set pressure on purchase order

Pressure Regulator

Type 4182-3 - CombiPressure-Regulator



Cryogenic-Pressure Regulator, stainless steel, PN50

Set point range from 2.0 up to 38.0 bar

Connections: male thread for union connection, BSPP (G) or M thread

Cleaning Standard: "cleaned and degreased for oxygen service" - **for oxygen (O₂) max. 30,0 bar / +60°C / 140°F (333K)**
complete with installed strainer screens - mesh size 0.25 mm - on connection A and B

Part No. 4182.X.3100* Set point range 2.0 up to 10.0 bar
set at 8.0 bar unless otherwise noted on purchase order

Part No. 4182.X.3200* Set point range 8.0 up to 22.0 bar
set at 12.0 bar unless otherwise noted on purchase order

Part No. 4182.X.3300* Set point range 20.0 up to 38.0 bar
set at 20.0 bar unless otherwise noted on purchase order

*connection C: 1 = M thread (cone connection 37°), 2 = BSPP (G) thread (cone connection 60°)

Available options - on request only:

- Further connections
- With check unit type 66044

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +60°C / 140°F (333K)

Ambient temperature: -40°C / -40°F (233K) up to +65°C / 149°F (338K)



Materials	DIN EN	ASTM
1 Body	CC491K	C83600
2 Bonnet (cover)	1.4408	CF8M
3 Bellow	1.4571	316Ti
4 Spring plate	1.4571	316Ti
5 Lift stopper	1.4571	316Ti
6 Lift stopper	1.4571	316Ti
7 Spring	1.4310	313
8 Spring clamp	1.4301	304
9 Locking nut	1.4301	304
10 Set point adjuster	1.4301	304
11 Strainer (option)	CW452K	C51900
12 Valve seal	PTFE	
13 Bellow disc	CW614N	C38500
14 Bellow	1.4571	316Ti
15 Bellow spring	1.4571	316Ti
16 Connection fitting	CC493K	C93200
17 Tubular overflow	CW614N	C38500
18 Union nut	1.4301	304
19 Flange cover	1.4308	CF8

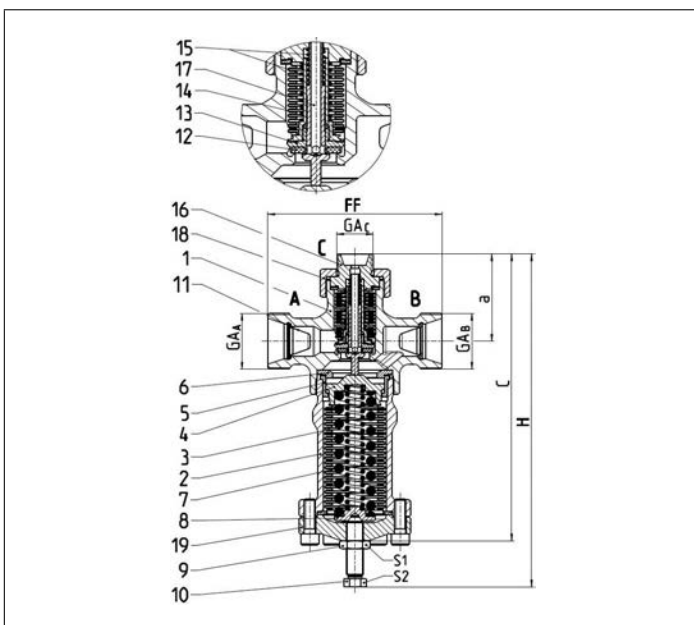

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 4182	Technical data		
Nominal size	DN	20	20
Dimension code	.X.	MM04020	MG12000
Face-to-face dimension	FF	125	125
Height	H	239	239
Thread	GA _A	M40x2.0	G 1-1/4
Thread	GA _B	M40x2.0	G 1-1/4
Thread	GA _C	M26x1.5	G 3/4
Length	a	63	63
Length	c	206	206
Wrench size across flats	S ₁	19	19
Wrench size across flats	S ₂	14	14
Weight	ca. kg	3.5	3.5
Kvs-Value	m ³ /h	3.2	3.2
Cv-Value	gal/min	3.7	3.7

Dimensions in mm.

Essential: Please confirm pressure range and valve set pressure on purchase order

Pressure Regulator

Type 4186-3 - CombiPressure-Regulator

HEROSE



Cryogenic-Pressure Regulator, stainless steel, PN40

Set point range from 2.0 up to 38.0 bar

Connections: male thread for union connection, BSPP (G) or M thread

Cleaning Standard: "cleaned and degreased for oxygen service" - **for oxygen (O₂) max. 30,0 bar / +60°C / 140°F (333K)**
complete with installed strainer screens - mesh size 0.25 mm - on connection A and B

Part No. 4186.X.3100* Set point range 2.0 up to 10.0 bar
set at 8.0 bar unless otherwise noted on purchase order

Part No. 4186.X.3200* Set point range 8.0 up to 22.0 bar
set at 12.0 bar unless otherwise noted on purchase order

Part No. 4186.X.3300* Set point range 20.0 up to 38.0 bar
set at 20.0 bar unless otherwise noted on purchase order

*connection C: 1 = M thread (cone connection 37°), 2 = BSPP (G) thread (cone connection 60°)

Available options - on request only:

- Further connections
- With check unit type 66044

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +200°C / 392°F (473K)

Ambient temperature: -40°C / -40°F (233K) up to +65°C / 149°F (338K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Bonnet (cover)	1.4408	A 351 CF8M
3 Bellow	1.4571	A 313 Grade 316Ti
4 Spring plate	1.4571	A 276 Grade 316Ti
5 Lift stopper	1.4571	A 276 Grade 316Ti
6 Lift stopper	1.4571	A 276 Grade 316Ti
7 Spring	1.4310	A 313 Grade 301
8 Spring clamp	1.4301	A 276 Grade 304
9 Locking nut	1.4301	A 276 Grade 304
10 Set point adjuster	1.4301	A 240 Grade 304
11 Strainer (option)	1.4301	A 240 Grade 304
12 Valve seal	PTFE	
13 Bellow disc	1.4571	A 313 Grade 316Ti
14 Bellow	1.4571	A 313 Grade 316Ti
15 Bellow spring	1.4571	A 313 Grade 316Ti
16 Connection fitting	1.4571	A 313 Grade 316Ti
17 Tubular overflow	1.4571	A 276 Grade 316Ti
18 Union nut	1.4301	A 276 Grade 304
19 Flange cover	1.4308	A 351 CF8

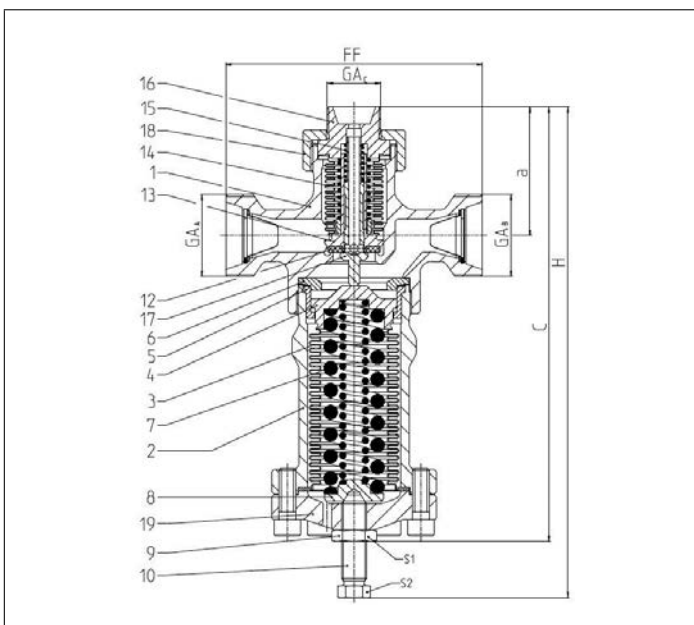

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 4186	Technical data		
Nominal size	DN	20	20
Dimension code	.X.	MM04020	MG12000
Face-to-face dimension	FF	125	125
Height	H	239	239
Thread	GA _A	M40x2.0	G 1-1/4
Thread	GA _B	M40x2.0	G 1-1/4
Thread	GA _C	M26x1.5	G 3/4
Length	a	63	63
Length	c	212	212
Wrench size across flats	S ₁	19	19
Wrench size across flats	S ₂	14	14
Weight	ca. kg	3.2	3.2
Kvs-Value	m ³ /h	3.2	3.2
Cv-Value	gal/min	3.7	3.7

Dimensions in mm.

Essential: Please confirm pressure range and valve set pressure on purchase order

Pressure Regulator

Type T118 - Globe Valve



Cryogenic Globe Valves with check unit, PN50

suitable for CombiPressure-Regulator type 4182/4186

Material: Stainless steel
Connections: Male thread for union connection
Installation position: Vertically

"cleaned and degreased for oxygen service" - for oxygen (O₂) max. 30.0 bar

Part No. T118.X.1A0C0

Male thread for union connection

Available options - on request only:

- Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312
- Union type butt weld fittings for stainless steel pipes acc. to ISO 1127 or ASTM A312
- Union type braze fittings for copper pipes acc. to DIN EN 12449 or ASTM B88
- Thread connection NPT acc. to ANSI B 1.20.1

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.


Working temperature: -196°C / -321°F (77K) up to +60°C / 140°F (333K)

Ambient temperature: -40°C / -40°F (233K) up to +65°C / 149°F (338K)

Maximum operating pressure: 50bar

Materials	DIN EN	ASTM
1 Body	1.4571	A 313 Grade 316Ti
2 Stem	1.4571	A 313 Grade 316Ti
3 Seal	PTFE	
4 Spring plate	1.4301	A 276 Grade 304
5 Gland nut	1.4301	A 276 Grade 304
6 O-ring	PTFE	
7 Spring	1.4571	A 313 Grade 316Ti
8 Snap ring	-	-
9 Guiding disc	1.4571	A 313 Grade 316Ti
10 Body	1.4571	A 313 Grade 316Ti
11 Ball	PTFE	
12 Snap ring	-	-
13 Gland nut	1.4301	A 276 Grade 304
14 Lock ring	1.4122	-
15 Spring compressor	1.4571	A 313 Grade 316Ti
16 Lock ring	1.4435	-

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

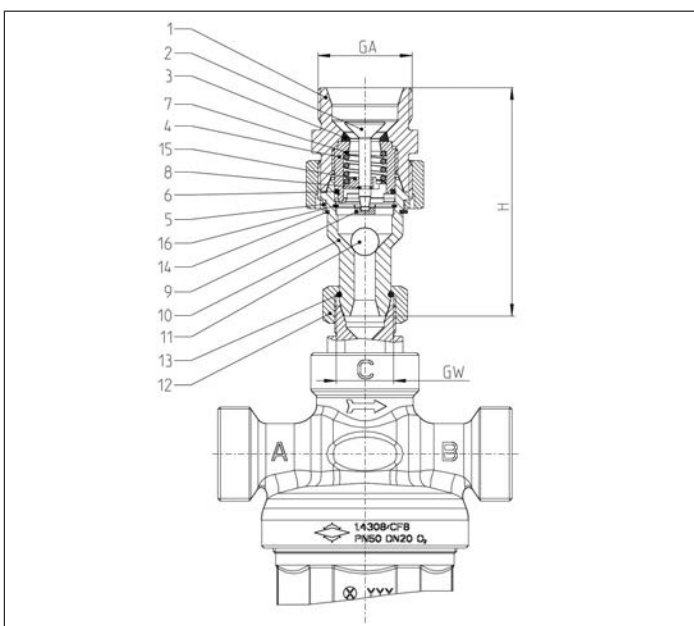

Type T118	Technical data	
Nominal size	DN	20
Dimension code	.X.	FM02615
Height	H	97
Thread	GA	M40x2.0
Thread	GW	M26x1.5
Weight	ca. kg	0.7
Kvs-Value	m ³ /h	2.0
Cv-Value	gal/min	2.3

Dimensions in mm.

Check Valves

Type 05412 - Check Valve



Cryogenic-Check Valves, PN50


Bronze body and cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05412.X.0001

Socket end for copper pipes acc. to DIN EN 12449 or ASTM B88

Available options - on request only:

- Socket end for stainless steel pipes acc. to ISO 1127




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Spring	CW452K	B 159 UNS C51900
5 Bonnet gasket	PTFE	
6 Bolts	1.4301/A2 A 194 B8	
7 Cap	CC493K	B 505 UNS C93200

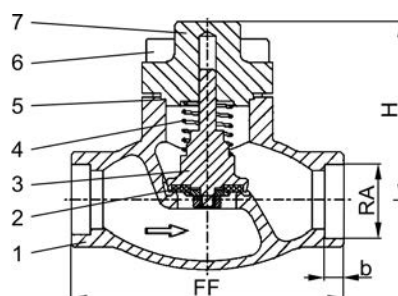

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05412 - Standard design	Technical data							
Nominal size	DN	10	15	20	25	32	40	50
Dimension code	.X.	X=DNRA, Example: valve DN10 for copper pipe RAØ12mm. X=1012						
Face-to-face dimension	FF	60	85	85	115	115	140	160
Height	H	71	71	72	75	87	95	95
Outside pipe-Ø	RA	dependent on order						
Socket depth	b	6	6	8	8	10	13	20
Weight	ca. kg	0.7	1.0	1.3	1.6	2.4	3.9	5.7
Kvs-Value	m ³ /h	1.6	4.3	6.7	11.5	12.1	22.6	37.1
Cv-Value	gal/min	1.9	5.0	7.8	13.4	14.1	26.3	43.2

Dimensions in mm.

Check Valves

Type 05412 - Check Valve




Cryogenic-Check Valves, PN50 (DN10-25), PN40 (DN32), PN35 (DN40-50)

Bronze body and cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05412.X.0008


Complete with brazed copper stubs acc. to DIN EN 12449

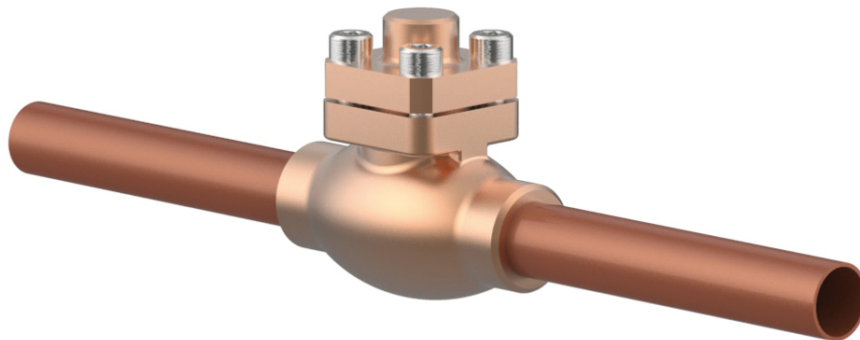

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Spring	CW452K	B 159 UNS C51900
5 Bonnet gasket	PTFE	
6 Bolts	1.4301/A2 A 194 B8	
7 Cap	CC493K	B 505 UNS C93200
8 Copper stubs	CW024A	B 152 UNS C12200

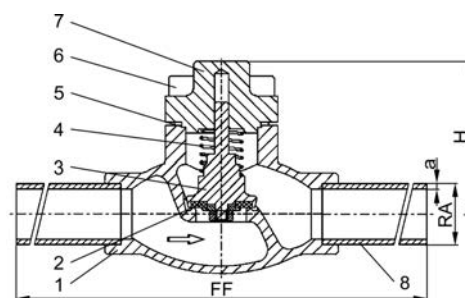

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05412 - Standard design	Technical data								
Nominal size	DN	10	15	15	20	25	32	40	50
Dimension code	.X.	1012	1515	1518	2022	2528	3235	4042	5054
Face-to-face dimension	FF	360	385	385	385	415	415	420	460
Height	H	71	71	71	72	75	87	95	95
Outside pipe-Ø	RA	12.0	15.0	18.0	22.0	28.0	35.0	42.0	54.0
Wall thickness pipe	a	1.0	1.5	1.5	1.5	1.5	1.5	1.5	2.0
Weight	ca. kg	0.8	1.1	1.1	1.4	2.0	2.8	4.5	6.5
Kvs-Value	m ³ /h	2.2	4.3	4.3	6.7	11.5	12.1	22.6	37.1
Cv-Value	gal/min	2.6	5.0	5.0	7.8	13.4	14.1	26.3	43.2

Dimensions in mm.

Check Valves

Type 05412 - Check Valve



Cryogenic-Check Valves, PN50


Bronze body and cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05412.X.0007

Complete with brazed stainless steel stubs acc. to DIN EN 10216-5 or ASTM A312

Available options - on request only:

- Further pipe wall thicknesses

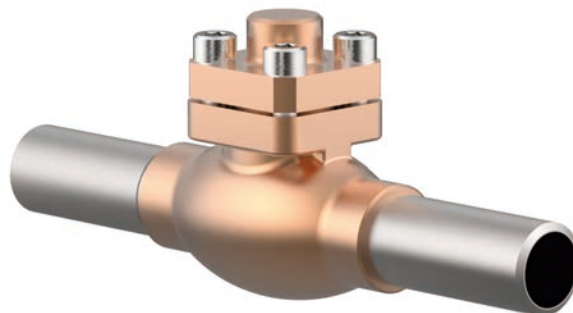


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Spring	CW452K	B 159 UNS C51900
5 Bonnet gasket	PTFE	
6 Bolts	1.4301/A2	A 194 B8
7 Cap	CC493K	B 505 UNS C93200
8 Stainless steel stubs	1.4306	A 312 TP304L

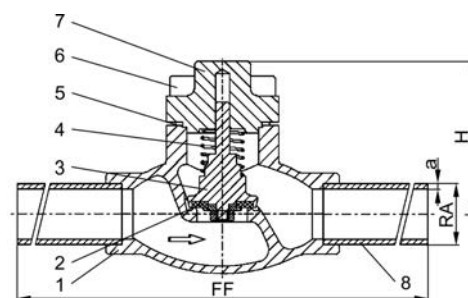

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05412 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	32	40	50
Dimension code	.X.	1012	1017	1521	2027	2533	3242	4048	5060
Face-to-face dimension	FF	210	210	235	235	265	265	290	310
Height	H	71	71	71	72	75	87	95	95
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	42.4	48.3	60.3
Wall thickness pipe ISO 1127	a	1.0	2.3	2.6	2.9	3.2	3.2	3.6	3.6
Outside pipe-Ø ASTM A312	RA	-	17.15	21.34	26.67	33.40	42.16	48.26	60.33
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40							
Weight	ca. kg	0.8	0.8	1.1	1.4	2.0	2.8	4.5	6.5
Kvs-Value	m ³ /h	2.2	2.2	4.3	6.7	11.5	12.1	22.6	37.1
Cv-Value	gal/min	2.6	2.6	5.0	7.8	13.4	14.1	26.3	43.2

Dimensions in mm.

Check Valves

Type 05413 - Check Valve



Cryogenic-Check Valves, PN50

Bronze body and cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05413.X.0001

Female thread connection (G) acc. to ISO 228/1

Part No. 05413.X.0006

Female thread connection NPT acc. to ANSI B 1.20.1

Available options - on request only:

· Female thread connection (R) acc. to ISO 7-Rc




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Spring	CW452K	B 159 UNS C51900
5 Bonnet gasket	PTFE	
6 Bolts	1.4301/A2 A 194 B8	
7 Cap	CC493K	B 505 UNS C93200

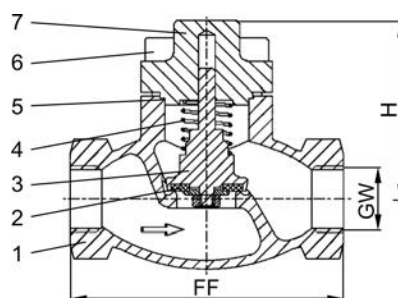

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05413 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	32	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	60	60	85	85	115	115	140	160
Height	H	71	71	71	72	75	87	95	95
Weight	ca. kg	0.7	0.7	1.0	1.3	1.6	2.4	3.9	5.7
Kvs-Value	m ³ /h	1.6	2.2	4.3	6.7	11.5	20.6	22.6	37.1
Cv-Value	gal/min	1.9	2.6	5.0	7.8	13.4	23.9	26.3	43.2

Dimensions in mm.

Check Valves

Type 05411 - Check Valve



Cryogenic-Check Valves, PN50

Bronze body and cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05411.X.0001


Male thread for union connection



Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Spring	CW452K	B 159 UNS C51900
5 Bonnet gasket	PTFE	
6 Bolts	1.4301/A2 A 194 B8	
7 Cap	CC493K	B 505 UNS C93200

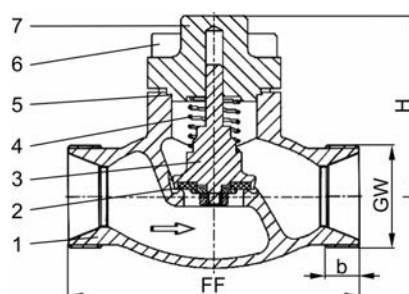

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05411 - Standard design	Technical data					
Nominal size	DN	10	20	32	40	50
Dimension code	.X.	0100	0200	0320	0400	0500
Face-to-face dimension	FF	60	85	115	140	160
Height	H	71	72	87	95	95
Union thread	GW	M26x1.5	M40x2.0	M55x2.0	M65x2.0	M78x2.0
Thread length	b	7	11	14	17	20
Weight	ca. kg	0.7	1.3	2.4	3.9	5.7
Kvs-Value	m ³ /h	2.2	6.7	12.1	22.6	37.1
Cv-Value	gal/min	2.6	7.8	14.1	26.3	43.2

Dimensions in mm.

Check Valves

Type 05411 - Check Valve




Cryogenic-Check Valves, PN50

Bronze body and cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05411.X.0008


Completed with union type braze fittings for copper pipes acc. to DIN EN 12449 or ASTM B88

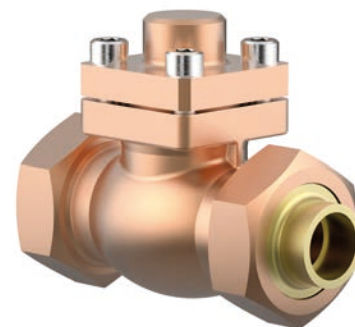

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Spring	CW452K	B 159 UNS C51900
5 Bonnet gasket	PTFE	
6 Bolts	1.4301/A2 A 194 B8	
7 Cap	CC493K	B 505 UNS C93200
8 Braze fitting	CC493K	B 505 UNS C93200
9 Union nut	CC493K	B 505 UNS C93200

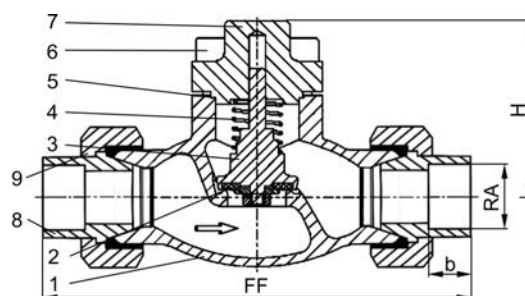

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05411 - Standard design	Technical data								
Nominal size	DN	10	10	20	20	32	32	40	50
Dimension code	.X.	1012	1015	1518	2022	2528	3235	4042	5054
Face-to-face dimension	FF	98	98	132	132	171	171	230	230
Height	H	71	71	72	72	87	87	95	95
Outside pipe-Ø	RA	12.0	15.0	18.0	22.0	28.0	35.0	42.0	54.0
Socket depth	b	11	11	14	14	17	17	17	17
Weight	ca. kg	0.9	0.9	2.0	2.0	3.6	3.6	6.0	8.5
Kvs-Value	m ³ /h	1.6	2.2	6.0	6.7	11.5	12.1	22.6	37.1
Cv-Value	gal/min	1.9	2.6	7.1	7.8	13.4	14.1	26.3	43.2

Dimensions in mm.

Check Valves

Type 05411 - Check Valve



Cryogenic-Check Valves, PN50


Bronze body and cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05411.X.0007

Completed with union type butt weld fittings for stainless steel pipes
acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Further pipe wall thicknesses

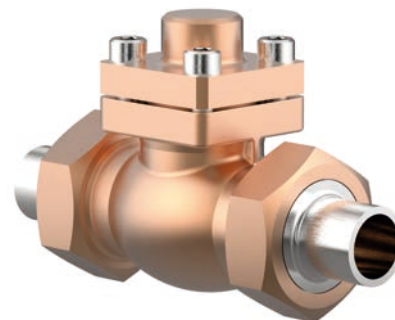


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Spring	CW452K	B 159 UNS C51900
5 Bonnet gasket	PTFE	
6 Bolts	1.4301/A2	A 194 B8
7 Cap	CC493K	B 505 UNS C93200
8 Weld fitting	1.4301	A 276 Grade 304
9 Union nut	CC493K	B 505 UNS C93200

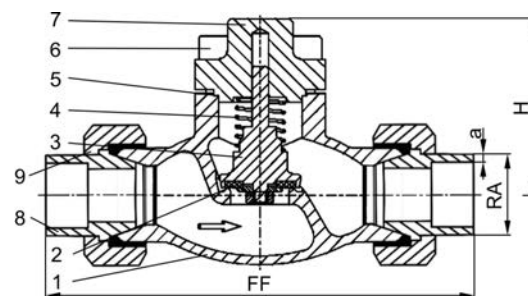

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05411 - Standard design	Technical data								
Nominal size	DN	10	10	20	20	32	32	40	50
Dimension code	.X.	1012	1017	1521	2027	2533	3242	4048	5060
Face-to-face dimension	FF	137	141	168	168	203	203	230	263
Height	H	71	71	72	72	87	87	95	95
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	42.4	48.3	60.3
Wall thickness pipe ISO 1127	a	1.0	2.3	2.6	2.0	3.2	2.0	3.6	3.6
Outside pipe-Ø ASTM A312	RA	-	17.15	21.34	26.67	33.40	42.16	48.26	60.33
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40							
Weight	ca. kg	0.9	0.9	2.0	2.0	3.6	3.6	6.0	8.5
Kvs-Value	m ³ /h	1.6	2.2	6.7	6.7	12.1	12.1	22.6	37.1
Cv-Value	gal/min	1.9	2.6	7.8	7.8	14.1	14.1	26.3	43.2

Dimensions in mm.

Check Valves

Type 05416 - Check Valve



Cryogenic-Check Valves, PN50 (DN150=PN40)

Stainless steel body and bronze cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05416.X.000*

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 05416.X.0004

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

· Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	CW614N	B 283 UNS C38500
4 Spring	CW452K	B 159 UNS C51900
5 Bonnet gasket	PTFE	
6 Bolts	1.4301/A2	A 194 B8
7 Cap	CC493K	B 505 UNS C93200

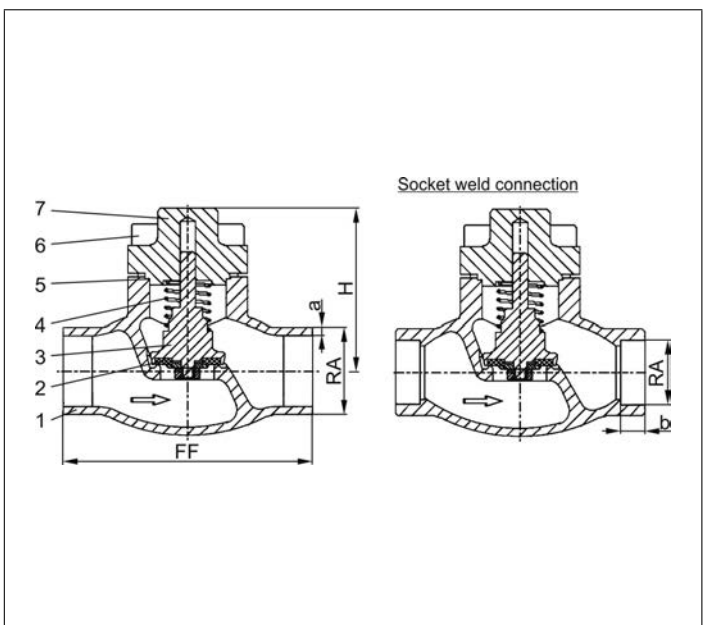

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05416 - Standard design	Technical data													
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100	150
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114	0168
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280	400
Height	H	71	71	71	72	75	87	95	95	95	125	150	185	215
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3	168.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0	7.1
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33	73.03	88.90	114.3	168.3
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40												
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20	20
Weight	ca. kg	0.7	0.95	1.0	1.3	1.6	2.4	3.9	3.9	5.7	9.6	14.6	20.0	51.0
Kvs-Value	m³/h	1.6	3.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	1.9	4.4	5.0	7.8	13.4	16.2	23.9	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Check Valves

Type 05415 - Check Valve



Cryogenic-Check Valves, PN50

Stainless steel body and bronze cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05415.X.0001

Female thread connection (G) acc. to ISO 228/1

Part No. 05415.X.0006

Female thread connection NPT acc. to ANSI B 1.20.1

Available options - on request only:

· Female thread connection (R) acc. to ISO 7-Rc




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW614N	B 283 UNS C38500
4 Spring	CW452K	B 159 UNS C51900
5 Bonnet gasket	PTFE	
6 Bolts	1.4301/A2 A 194 B8	
7 Cap	CC493K	B 505 UNS C93200

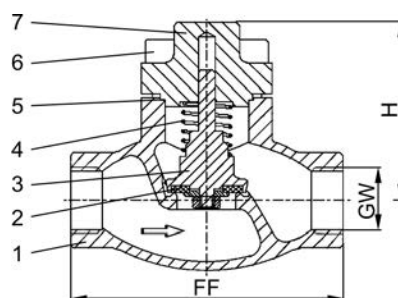

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05415 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	32	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	70	70	85	100	115	130	130	155
Height	H	71	71	71	72	75	95	95	95
Weight	ca. kg	0.7	0.7	1.0	1.3	1.6	3.9	3.9	5.7
Kvs-Value	m ³ /h	1.6	2.2	4.3	6.7	11.5	20.6	22.6	37.1
Cv-Value	gal/min	1.9	2.6	5.0	7.8	13.4	23.9	26.3	43.2

Dimensions in mm.

Check Valves

Type 05418 - Check Valve, DIN EN Flanges




Cryogenic-Check Valves, PN40

Stainless steel body and bronze cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05418.X.0002


Flanged connection acc. to DIN EN 1092-1 PN40

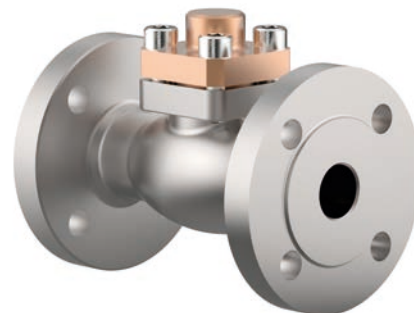

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	CW614N	B 283 UNS C38500
4 Spring	CW452K	B 159 UNS C51900
5 Bonnet gasket	PTFE	
6 Bolts	1.4301/A2	A 194 B8
7 Cap	CC493K	B 505 UNS C93200

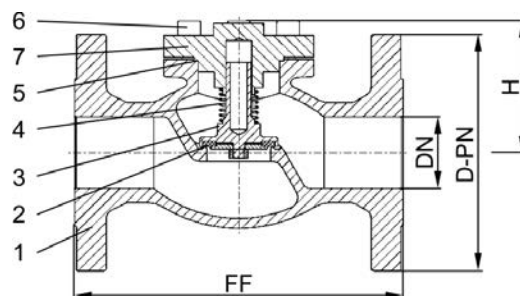

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05418 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	70	75	75	95	90	125	150	165	215
Weight	ca. kg	2.9	3.4	4.4	6.4	11.6	19.2	25.2	39.8	72.7
Kvs-Value	m³/h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Check Valves

Type 05418 - Check Valve, ANSI Flanges




Cryogenic-Check Valves, class 300

Stainless steel body and bronze cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05418.X.0003


Flanged connection acc. to ANSI B16.5 class 300

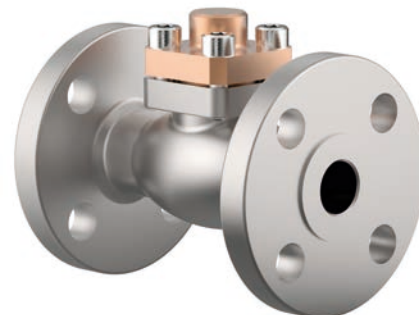

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	CW614N	B 283 UNS C38500
4 Spring	CW452K	B 159 UNS C51900
5 Bonnet gasket	PTFE	
6 Bolts	1.4301/A2	A 194 B8
7 Cap	CC493K	B 505 UNS C93200

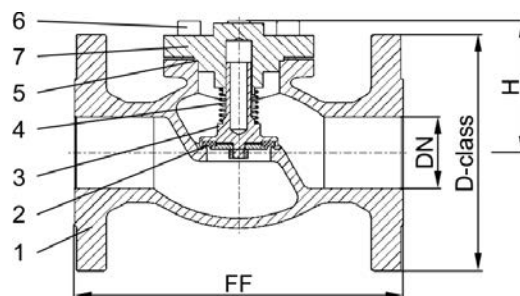

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05418 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	70	75	75	95	90	125	150	165	215
Weight	ca. kg	2.9	3.4	4.4	6.4	11.6	19.2	25.2	39.8	90.3
Kvs-Value	m³/h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Check Valves

Type 05418 - Check Valve, ANSI Flanges




Cryogenic-Check Valves, class 150

Stainless steel body and bronze cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05418.X.0001


Flanged connection acc. to ANSI B16.5 class 150

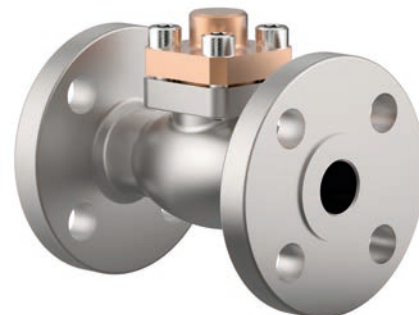

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	CW614N	B 283 UNS C38500
4 Spring	CW452K	B 159 UNS C51900
5 Bonnet gasket	PTFE	
6 Bolts	1.4301/A2	A 194 B8
7 Cap	CC493K	B 505 UNS C93200

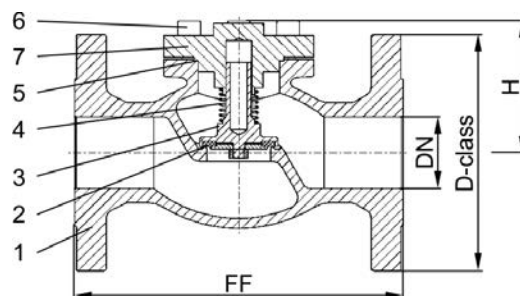

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05418 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	70	75	75	95	90	125	150	165	215
Weight	ca. kg	2.9	3.4	4.4	6.4	11.6	19.2	25.2	39.8	81.5
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm.

Check Valves

Type 05414 - Check Valve



Cryogenic-Check Valves, PN50 (DN150=PN40)

Stainless steel body and cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05414.X.000*

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 05414.X.0004

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Further pipe wall thicknesses




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Spring	1.4571	A 313 Grade 316Ti
5 Bonnet gasket	PTFE	
6 Bolts	1.4301/A2	A 194 B8
7 Cap	1.4301	A 276 Grade 304
7a Bush from DN65	PTFE	

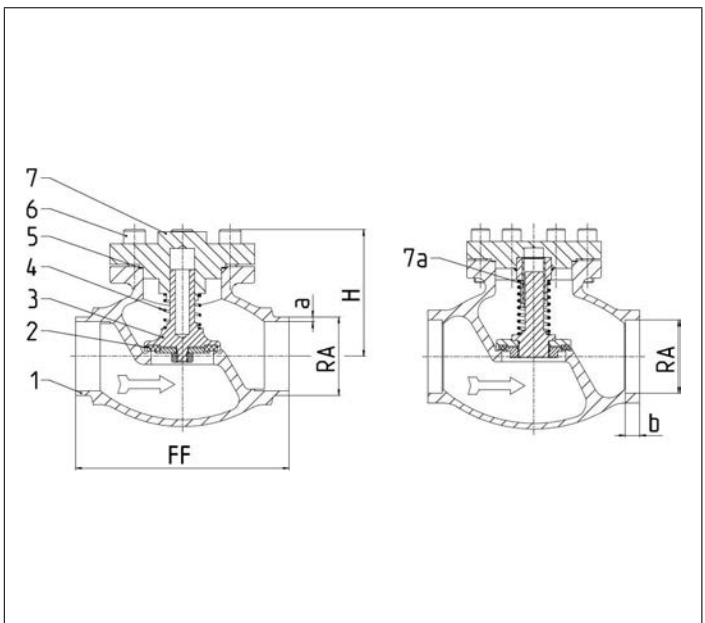

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05414 - Standard design	Technical data													
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100	150
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114	0168
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280	400
Height	H	71	71	71	72	75	87	95	95	95	125	150	185	215
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3	168.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0	7.1
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33	73.03	88.90	114.3	168.3
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40												
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20	20
Weight	ca. kg	0.7	0.95	1.0	1.3	1.6	2.4	3.9	3.9	5.7	9.6	14.6	20.0	51.0
Kvs-Value	m³/h	1.6	3.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	1.9	4.4	5.0	7.8	13.4	16.2	23.9	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Check Valves

Type 05414 - Check Valve



Cryogenic-Check Valves, PN25

Stainless steel body and cap
with spring, opening pressure ca. 0.1 bar

Part No. 05414.0219.0004

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Spring	1.4571	A 313 Grade 316Ti
5 Bonnet gasket	PTFE	
6 Bolts	1.4301/A2	A 194 B8
7 Cap	1.4301	A 276 Grade 304

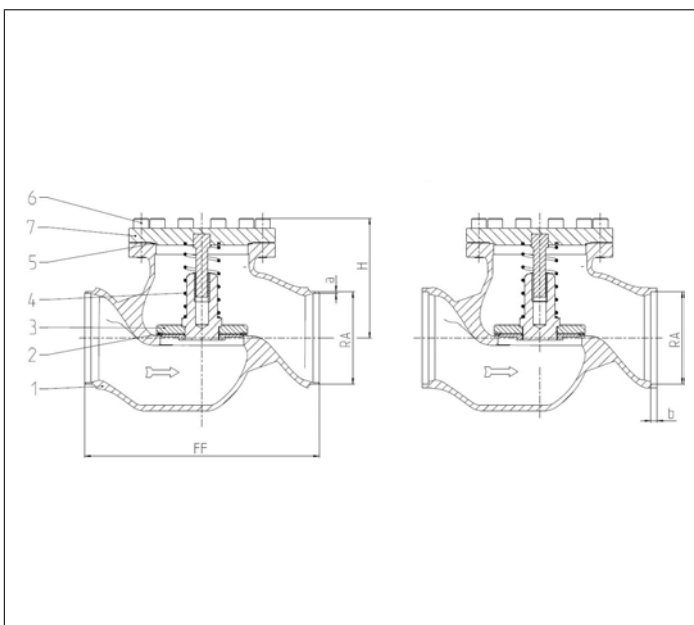

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05414 - Standard design	Technical data	
Nominal size	DN	200
Dimension code	.X.	0219
Face-to-face dimension	FF	560
Height	H	285
Outside pipe-Ø ISO 1127	RA	219.1
Wall thickness pipe ISO 1127	a	6.3
Outside pipe-Ø ASTM A312	RA	219.1
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40
Socket depth	b	15
Weight	ca. kg	111
Kvs-Value	m ³ /h	680
Cv-Value	gal/min	786

Dimensions in mm.

Check Valves

Type 05417 - Check Valve



Cryogenic-Check Valves, PN50

Stainless steel body and cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05417.X.0001

Female thread connection (G) acc. to ISO 228/1

Part No. 05417.X.0006

Female thread connection NPT acc. to ANSI B 1.20.1

Available options - on request only:

· Female thread connection (R) acc. to ISO 7-Rc




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Spring	1.4571	A 313 Grade 316Ti
5 Bonnet gasket	PTFE	
6 Bolts	1.4301/A2	A 194 B8
7 Cap	1.4301	A 276 Grade 304

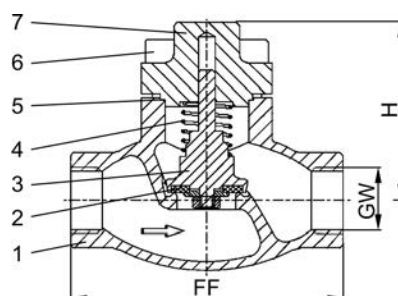

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05417 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	40	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	70	70	85	100	115	130	130	155
Height	H	71	71	71	72	75	95	95	95
Weight	ca. kg	0.7	0.7	1.0	1.3	1.6	3.9	3.9	5.7
Kvs-Value	m ³ /h	1.6	2.2	4.3	6.7	11.5	20.6	22.6	37.1
Cv-Value	gal/min	1.9	2.6	5.0	7.8	13.4	23.9	26.3	43.2

Dimensions in mm.

Check Valves

Type 05419 - Check Valve, DIN EN Flanges




Cryogenic-Check Valves, PN40

Stainless steel body and cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05419.X.0002


Flanged connection acc. to DIN EN 1092-1 PN40

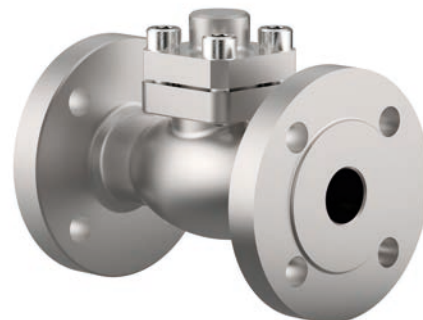

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Spring	1.4571	A 313 Grade 316Ti
5 Bonnet gasket	PTFE	
6 Bolts	1.4301/A2	A 194 B8
7 Cap	1.4301	A 276 Grade 304
7a Bush from DN65	PTFE	

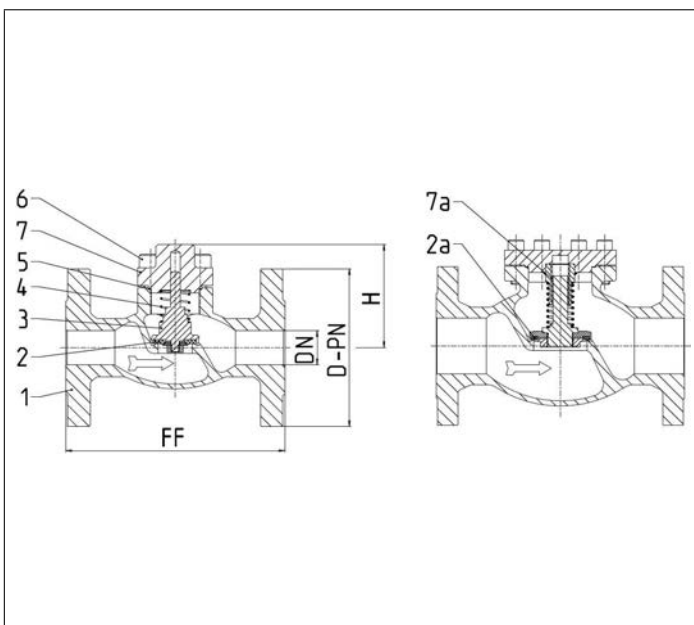

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05419 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	70	75	75	95	90	125	150	165	215
Weight	ca. kg	2.9	3.4	4.4	6.4	11.6	19.2	25.2	39.8	72.7
Kvs-Value	m³/h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Check Valves

Type 05419 - Check Valve, ANSI Flanges




Cryogenic-Check Valves, class 300

Stainless steel body and cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05419.X.0003


Flanged connection acc. to ANSI B16.5 class 300

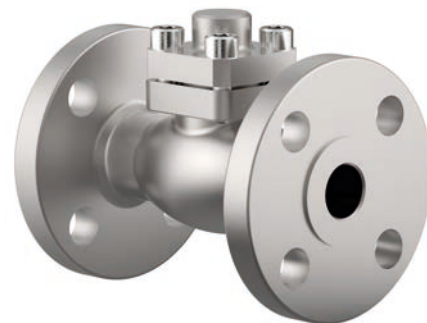

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Spring	1.4571	A 313 Grade 316Ti
5 Bonnet gasket	PTFE	
6 Bolts	1.4301/A2	A 194 B8
7 Cap	1.4301	A 276 Grade 304
7a Bush from DN65	PTFE	

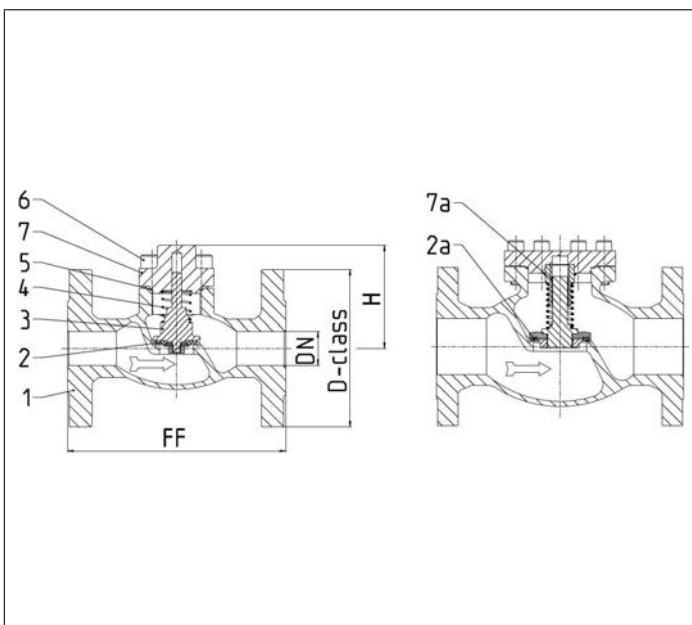

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05419 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	70	75	75	95	90	125	150	165	215
Weight	ca. kg	2.9	3.4	4.4	6.4	11.6	19.2	25.2	39.8	90.3
Kvs-Value	m³/h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Check Valves

Type 05419 - Check Valve, ANSI Flanges




Cryogenic-Check Valves, class 150

Stainless steel body and cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05419.X.0001


Flanged connection acc. to ANSI B16.5 class 150

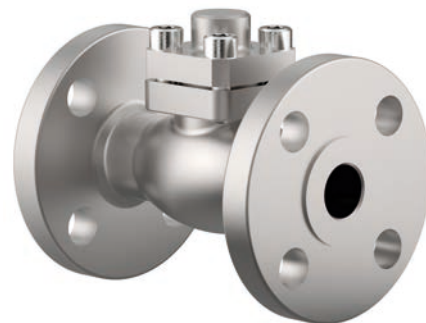

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4301	A 276 Grade 304
4 Spring	1.4571	A 313 Grade 316Ti
5 Bonnet gasket	PTFE	
6 Bolts	1.4301/A2	A 194 B8
7 Cap	1.4301	A 276 Grade 304
7a Bush from DN65	PTFE	

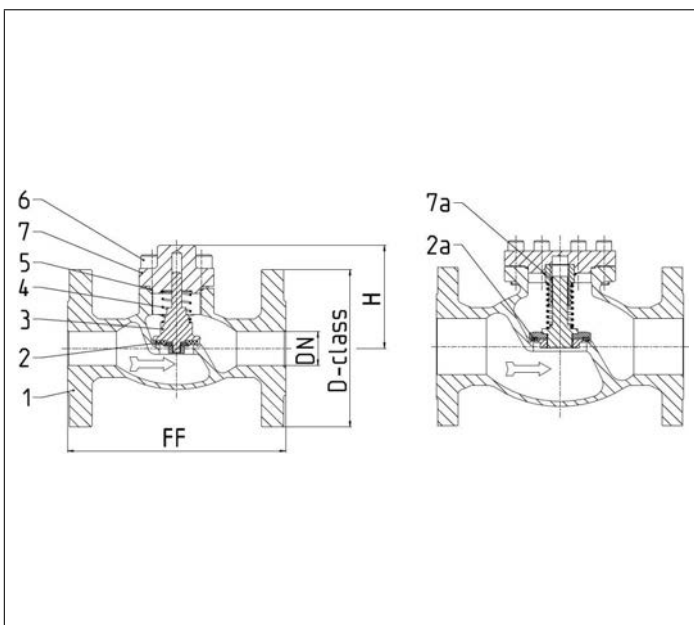

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05419 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	70	75	75	95	90	125	150	165	215
Weight	ca. kg	2.9	3.4	4.4	6.4	11.6	19.2	25.2	39.8	81.5
Kvs-Value	m³/h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm.

Spare Parts for Check Valves

Type 28205, Type 28206 - Check Disc complete



for Cryogenic-Check Valves


brass check disc CW614N

"cleaned and degreased for oxygen service"

Part No. 28205.X.0000

suitable for:

Type	Nominal size
05411, 05412, 05413, 05415	DN10 - DN50
05416	DN10 - DN150
05418	DN25 - DN150



Type 28205.X.0000	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Disc Ø	L	23	25	30	34.5	42	47	55	73	86	104	155
Weight	ca. kg	0.05	0.07	0.09	0.10	0.15	0.20	0.34	0.48	0.66	1.05	3.28

Dimensions in mm.

for Cryogenic-Check Valves


stainless steel check disc 1.4301

"cleaned and degreased for oxygen service"

Part No. 28206.X.0000

suitable for:

Type	Nominal size
05414	DN10 - DN150
05417	DN10 - DN50
05419	DN25 - DN150



Type 28206.X.0000	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Disc Ø	L	23	25	30	34.5	42	47	55	73	86	104	155
Weight	ca. kg	0.05	0.07	0.09	0.10	0.15	0.20	0.34	0.48	0.66	1.05	3.28

Dimensions in mm.

Spare Parts for Check Valves

Type 30514 - Sealing spare part kit



for Cryogenic Globe Valves and Check Valves

"cleaned and degreased for oxygen service"


Part No. 30514.X.0000

consisting of:

- 2x Bonnet gasket PTFE
- 1x Disc seal PTFE/Carbon filled (25%)
- 1x Disc nut 1.4301

passend zu:

Type	Nominal size
05412, 05411, 05413	DN10 - DN50
05416, 05414	DN10 - DN150
05415, 05417	DN10 - DN50
05418, 05419	DN10 - DN150

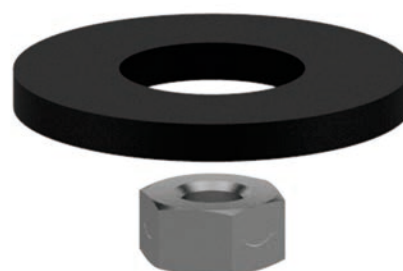

Bonnet gasket
(PTFE)



Disc seal
(PTFE-25% carbon)



Disc nut - self locking

Type 30514	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Weight	ca. kg	0.02	0.02	0.03	0.04	0.06	0.07	0.11	0.16	0.22	0.30	0.34

Dimensions in mm.

Edition 2020-02

Spare Parts for Check Valves

Type 31514 - KEL-F (PCTFE) Disc Sealing spare part kit



for Cryogenic Globe Valves and Check Valves

"cleaned and degreased for oxygen service"


Part No. 31514.X.PCTFE

consisting of:

- 2x Bonnet gasket PTFE
- 1x Disc seal KEL-F (PCTFE)
- 1x Disc nut 1.4301

suitable for disc's for the following types:

Type	Nominal size
05412, 05411, 05413	DN10 - DN50
05416, 05414	DN10 - DN100
05415, 05417	DN10 - DN50
05418, 05419	DN10 - DN150

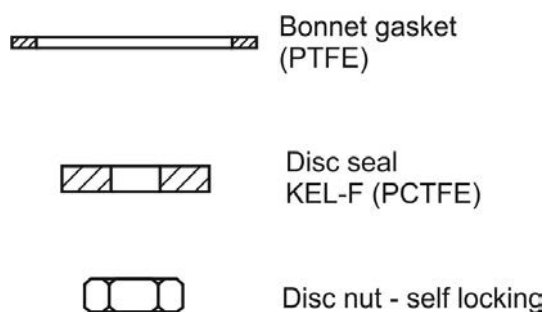

Type 31514	Technical data										
Nominal size	DN	10	15	20	25	32	40	50	65	80	100
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000
Weight	ca. kg	0.02	0.02	0.03	0.04	0.06	0.07	0.11	0.16	0.22	0.30

Dimensions in mm.

Strainers

Type 08411 - Strainer



Cryogenic-Strainer, PN50

Bronze body and cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08411.X.0001

Male thread for union connection

Available options - on request only:

- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Strainer screen	1.4301	A 240 Grade 304
3 Bonnet gasket	PTFE	
4 Bolts	1.4301/A2	A 194 B8
5 Cap	CC493K	B 505 UNS C93200

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

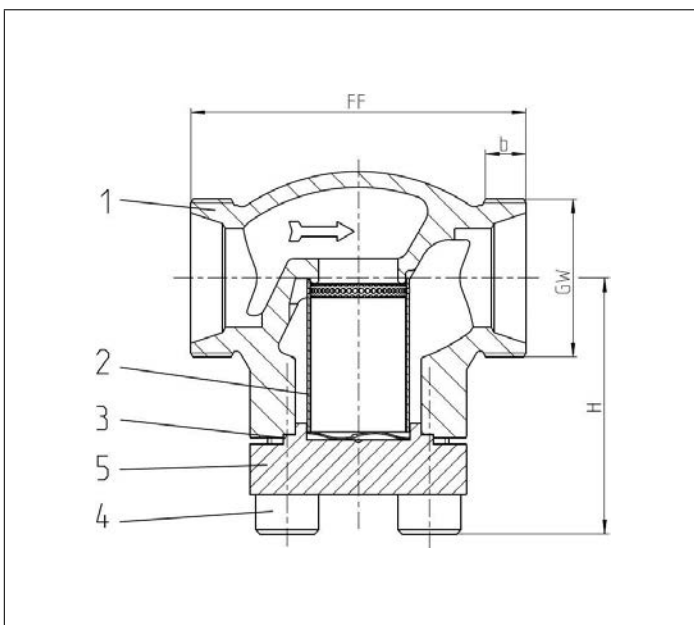

Type 08411 - Standard design	Technical data					
Nominal size	DN	10	20	32	40	50
Dimension code	.X.	0100	0200	0320	0400	0500
Face-to-face dimension	FF	60	85	115	140	160
Height	H	62	65	76	89	89
Union thread	GW	M26x1.5	M40x2.0	M55x2.0	M65x2.0	M78x2.0
Thread length	b	10	11	14	17	20
Weight	ca. kg	0.6	0.9	1.8	3.1	4.7
Kvs - Value	m ³ /h	1.5	6.5	14.0	21.0	28.0
Cv - Value	gal/min	1.7	7.5	16.2	24.3	32.4

Dimensions in mm.

Strainers

Type 08411 - Strainer



Cryogenic-Strainer, PN50


Bronze body and cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08411.X.0008

Completed with union type braze fittings for copper pipes acc. to DIN EN 12449 or ASTM B88

Available options - on request only:

- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Strainer screen	1.4301	A 240 Grade 304
3 Bonnet gasket	PTFE	
4 Bolts	1.4301/A2	A 194 B8
5 Cap	CC493K	B 505 UNS C93200
6 Braze fitting	CC493K	B 505 UNS C93200
7 Union nut	CC493K	B 505 UNS C93200

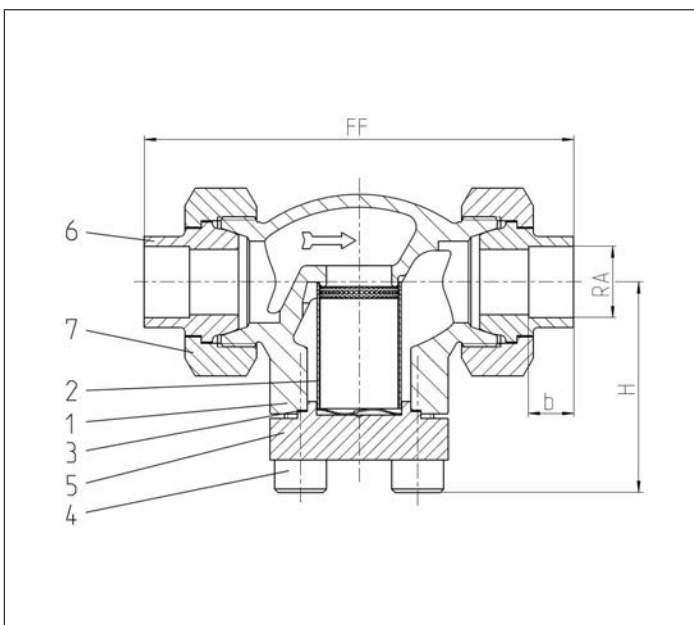

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 08411 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	32	40	50
Dimension code	.X.	1012	1015	1518	2022	2528	3235	4042	5054
Face-to-face dimension	FF	98	98	132	132	171	171	230	230
Height	H	62	62	62	65	69	76	89	89
Outside pipe-Ø	RA	12.0	15.0	18.0	22.0	28.0	35.0	42.0	54.0
Socket depth	b	11	11	14	14	17	17	17	17
Weight	ca. kg	0.6	0.6	0.8	0.9	1.2	1.8	3.1	4.7
Kvs - Value	m ³ /h	1.5	1.5	3.4	6.5	9.5	14.0	21.0	28.0
Cv - Value	gal/min	1.7	1.7	3.9	7.5	11.0	16.2	24.3	32.4

Dimensions in mm.

Cryogenic-Strainer, PN50


Bronze body and cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08411.X.0007

Completed with union type butt weld fittings for stainless steel pipes
acc. to ISO 1127 or ASTM A312

Available options - on request only:

- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities
- Further pipe wall thicknesses

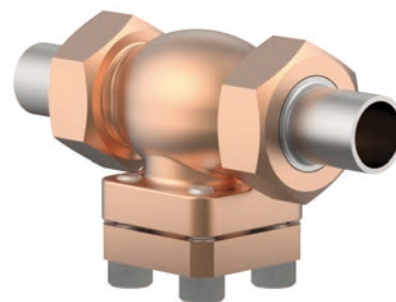


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Strainer screen	1.4301	A 240 Grade 304
3 Bonnet gasket	PTFE	
4 Bolts	1.4301/A2	A 194 B8
5 Cap	CC493K	B 505 UNS C93200
6 Weld fitting	1.4301	A 276 Grade 304
7 Union nut	CC493K	B 505 UNS C93200

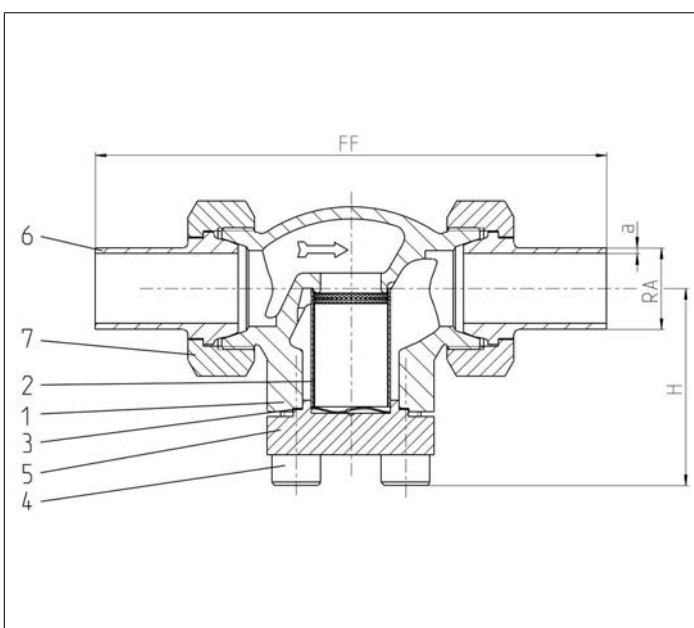

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 08411 - Standard design	Technical data								
Nominal size	DN	10	10	20	20	32	32	40	50
Dimension code	.X.	1012	1017	1521	2027	2533	3242	4048	5060
Face-to-face dimension	FF	137	141	168	168	203	203	230	263
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	42.4	48.3	60.3
Wall thickness pipe ISO 1127	a	1.0	2.3	2.6	2.0	3.2	2.0	3.6	3.6
Outside pipe-Ø ASTM A312	RA	-	17.15	21.34	26.67	33.40	42.16	48.26	60.33
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40							
Height	H	62	62	62	65	69	76	89	89
Weight	ca. kg	0.6	0.6	0.8	0.9	1.2	1.8	3.1	4.7
Kvs - Value	m ³ /h	1.6	2.2	6.7	6.7	12.1	12.1	22.6	37.1
Cv - Value	gal/min	1.9	2.6	7.8	7.8	14.1	14.1	26.3	43.2

Dimensions in mm.

Strainers

Type 08412 - Strainer



Cryogenic-Strainer, PN50


Bronze body and cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08412.X.0001

Socket end for copper pipes acc. to DIN EN 12449 or ASTM B88

Available options - on request only:

- Socket end for stainless steel pipes acc. to ISO 1127
- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Sieb	1.4301	A 240 Grade 304
3 Bonnet gasket	PTFE	
4 Bolts	1.4301/A2	A 194 B8
5 Cap	CC493K	B 505 UNS C93200

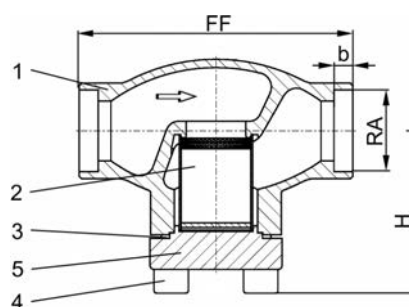

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 08412 - Standard design	Technical data							
Nominal size	DN	10	15	20	25	32	40	50
Dimension code	.X.	X=DNRA, Example: valve DN10 for copper pipe RAø12mm, X=1012						
Face-to-face dimension	FF	60	85	85	115	115	140	160
Height	H	62	62	65	69	76	89	89
Outside pipe-Ø	RA	dependent on order						
Socket depth	b	6	6	8	8	10	13	20
Weight	ca. kg	0.6	0.8	0.9	1.2	1.8	3.1	4.7
Kvs-Value	m ³ /h	1.5	3.4	6.5	9.5	14.0	21.0	28.0
Cv-Value	gal/min	1.7	3.9	7.5	11.0	16.2	24.3	32.4

Dimensions in mm.

Strainers

Type 08412 - Strainer



Cryogenic-Strainer, PN50 (DN10-25), PN40 (DN32), PN35 (DN40-50)


Bronze body and cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08412.X.0008

Complete with brazed copper stubs acc. to DIN EN 12449

Available options - on request only:

- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities

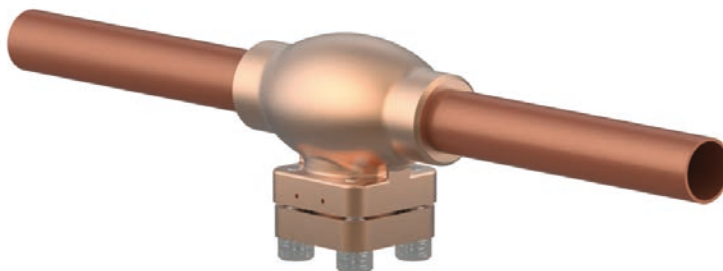


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Strainer screen	1.4301	A 240 Grade 304
3 Bonnet gasket	PTFE	
4 Bolts	1.4301/A2	A 194 B8
5 Cap	CC493K	B 505 UNS C93200
6 Copper stubs	CW024A	B 152 UNS C12200

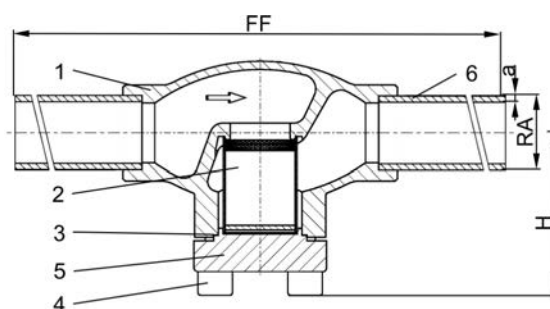

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 08412 - Standard design		Technical data							
Nominal size	DN	10	15	15	20	25	32	40	50
Dimension code	.X.	1012	1515	1518	2022	2528	3235	4042	5054
Face-to-face dimension	FF	360	385	385	385	415	415	420	460
Height	H	62	62	62	65	69	76	89	89
Outside pipe-Ø	RA	12.0	15.0	18.0	22.0	28.0	35.0	42.0	54.0
Wall thickness pipe	a	1.0	1.5	1.5	1.5	1.5	1.5	1.5	2.0
Weight	ca. kg	0.75	1.0	1.0	1.2	1.8	2.5	4.1	6.0
Kvs-Value	m ³ /h	1.5	3.4	3.4	6.5	9.5	14.0	21.0	28.0
Cv-Value	gal/min	1.7	3.9	3.9	7.5	11.0	16.2	24.3	32.4

Dimensions in mm.

Strainers

Type 08412 - Strainer



Cryogenic-Strainer, PN50


Bronze body and cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08412.X.0007

Complete with brazed stainless steel stubs acc. to DIN EN 10216-5 or ASTM A312

Available options - on request only:


- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities
- Further pipe wall thicknesses

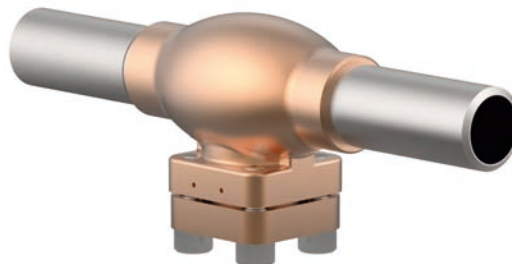

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Strainer screen	1.4301	A 240 Grade 304
3 Bonnet gasket	PTFE	
4 Bolts	1.4301/A2	A 194 B8
5 Cap	CC493K	B 505 UNS C93200
6 Stainless steel stubs	1.4306	A 312 TP304L

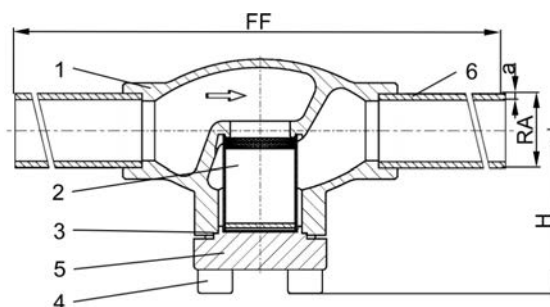

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 08412 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	32	40	50
Dimension code	.X.	1012	1017	1521	2027	2533	3242	4048	5060
Face-to-face dimension	FF	210	210	235	235	265	265	290	310
Height	H	62	62	62	65	69	76	89	89
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	42.4	48.3	60.3
Wall thickness pipe ISO 1127	a	1.0	2.3	2.6	2.9	3.2	3.2	3.6	3.6
Outside pipe-Ø ASTM A312	RA	-	17.15	21.34	26.67	33.4	42.16	48.26	60.33
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40							
Weight	ca. kg	0.75	0.75	1.0	1.2	1.8	2.5	4.1	6.0
Kvs-Value	m ³ /h	1.5	1.5	3.4	6.5	9.5	14.0	21.0	28.0
Cv-Value	gal/min	1.7	1.7	3.9	7.5	11.0	16.2	24.3	32.4

Dimensions in mm.

Strainers

Type 08413 - Strainer



Cryogenic-Strainer, PN50

Bronze body and cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08413.X.0001


Female thread connection (G) acc. to ISO 228/1

Part No. 08413.X.0006

Female thread connection NPT acc. to ANSI B 1.20.1

Available options - on request only:

- Female thread connection (R) acc. to ISO 7-Rc
- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	CC491K	B 62 UNS C83600
2 Strainer screen	1.4301	A 240 Grade 304
3 Bonnet gasket	PTFE	
4 Bolts	1.4301/A2 A 194 B8	
5 Cap	CC493K	B 505 UNS C93200

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

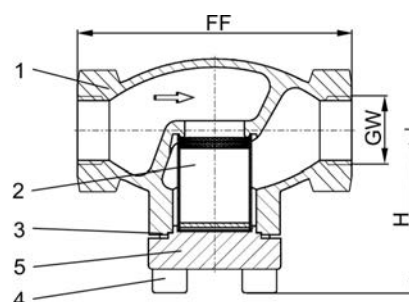

Type 08413 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	32	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	60	60	85	85	115	115	140	160
Height	H	62	62	62	65	69	76	89	89
Weight	ca. kg	0.6	0.6	0.8	0.9	1.2	1.8	3.1	4.7
Kvs-Value	m ³ /h	1.5	1.5	3.4	6.5	9.5	14.0	21.0	28.0
Cv-Value	gal/min	1.7	1.7	3.9	7.5	11.0	16.2	24.3	32.4

Dimensions in mm.

Strainers

Type 08414 - Strainer



Cryogenic-Strainer, PN50 (DN150=PN40)

Stainless steel body and bronze cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08414.X.000*

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 08414.X.0004

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Strainer screen	1.4301	A 240 Grade 304
3 Bonnet gasket	PTFE	
4 Bolts	1.4301/A2	A 194 B8
5 Cap	CC493K	B 505 UNS C93200

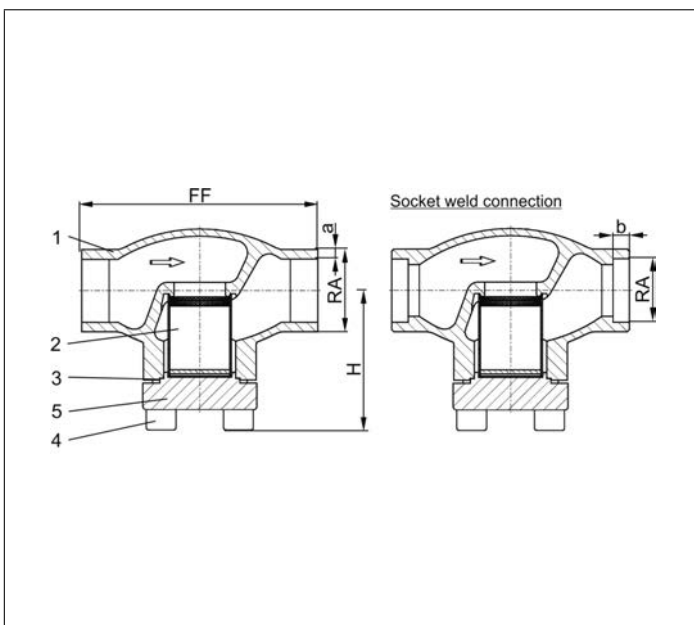

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 08414 - Standard design	Technical data														
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100	150	
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114	0168	
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280	400	
Height	H	62	62	62	65	69	76	89	89	89	125	150	166	215	
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3	168.3	
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0	7.1	
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33	73.03	88.90	114.3	168.3	
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40													
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20	20	
Weight	ca. kg	0.6	0.75	0.8	0.9	1.2	1.8	3.1	3.1	4.7	8.9	13.6	18.0	48.0	
Kvs-Value	m³/h	1.5	3.4	3.4	6.5	9.5	14.0	19.0	21.0	28.0	62.0	90.0	118.0	300.0	
Cv-Value	gal/min	1.7	3.9	3.9	7.5	11.0	16.2	22.0	24.3	32.4	71.7	104.0	136.4	346.8	

Dimensions in mm.

Strainers

Type 08415 - Strainer



Cryogenic-Strainer, PN50

Stainless steel body and bronze cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08415.X.0001

Female thread connection (G) acc. to ISO 228/1

Part No. 08415.X.0006

Female thread connection NPT acc. to ANSI B 1.20.1

Available options - on request only:

- Female thread connection (R) acc. to ISO 7-Rc
- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Sieb	1.4301	A 240 Grade 304
3 Bonnet gasket	PTFE	
4 Capschrauben	1.4301/A2	A 194 B8
5 Cap	CC493K	B 505 UNS C93200

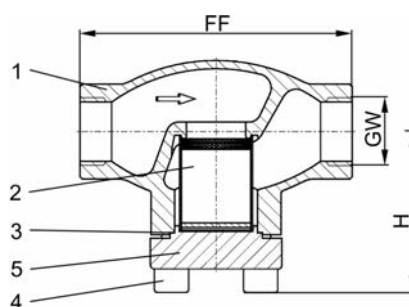

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 08415 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	40	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	70	70	85	100	115	130	130	155
Height	H	62	62	62	65	69	89	89	89
Weight	ca. kg	0.6	0.6	0.8	0.9	1.2	3.1	3.1	4.7
Kvs-Value	m ³ /h	1.5	1.5	3.4	6.5	9.5	19.0	21.0	28.0
Cv-Value	gal/min	1.7	1.7	3.9	7.5	11.0	22.0	24.3	32.4

Dimensions in mm.

Strainers

Type 08431 - Strainer, DIN EN Flanges



Cryogenic-Strainer, PN40


Stainless steel body and bronze cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08431.X.0002

Flanged connection acc. to DIN EN 1092-1 PN40

Available options - on request only:

- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities

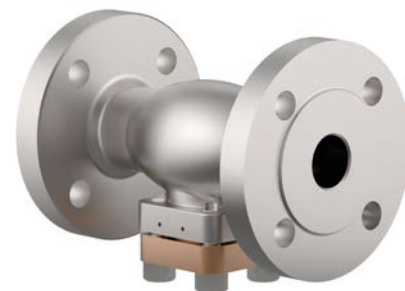


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Strainer screen	1.4301	A 240 Grade 304
3 Bonnet gasket	PTFE	
4 Bolts	1.4301/A2	A 194 B8
5 Cap	CC493K	B 505 UNS C93200

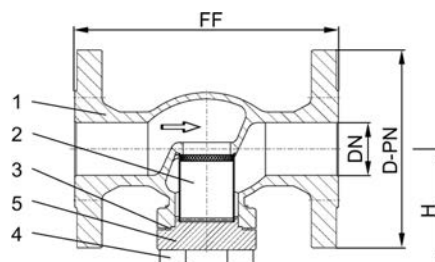

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 08431 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	62	69	69	89	89	125	150	166	212
Weight	ca. kg	2.5	3.0	4.0	8.1	10.6	17.7	23.2	36.8	68.1
Kvs-Value	m ³ /h	4.3	6.7	9.5	21.0	28.0	62.0	90.0	118.0	on request
Cv-Value	gal/min	5.0	7.8	11.0	24.3	32.4	71.7	104.0	136.4	on request

Dimensions in mm.

Strainers

Type 08431 - Strainer, ANSI Flanges



Cryogenic-Strainer, class 300

Stainless steel body and bronze cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08431.X.0003

Flanged connection acc. to ANSI B16.5 class 300

Available options - on request only:

- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Strainer screen	1.4301	A 240 Grade 304
3 Bonnet gasket	PTFE	
4 Bolts	1.4301/A2	A 194 B8
5 Cap	CC493K	B 505 UNS C93200

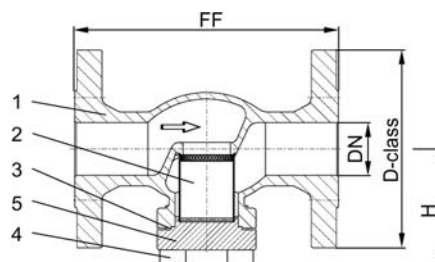

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 08431 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	62	69	69	89	89	125	150	166	212
Weight	ca. kg	2.5	3.0	4.0	8.1	10.6	17.7	23.2	36.8	85.7
Kvs-Value	m³/h	4.3	6.7	9.5	21.0	28.0	62.0	90.0	118.0	on request
Cv-Value	gal/min	5.0	7.8	11.0	24.3	32.4	71.7	104.0	136.4	on request

Dimensions in mm.

Strainers

Type 08431 - Strainer, ANSI Flanges



Cryogenic-Strainer, class 150

Stainless steel body and bronze cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08431.X.0001

Flanged connection acc. to ANSI B16.5 class 150

Available options - on request only:

- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Strainer screen	1.4301	A 240 Grade 304
3 Bonnet gasket	PTFE	
4 Bolts	1.4301/A2	A 194 B8
5 Cap	CC493K	B 505 UNS C93200

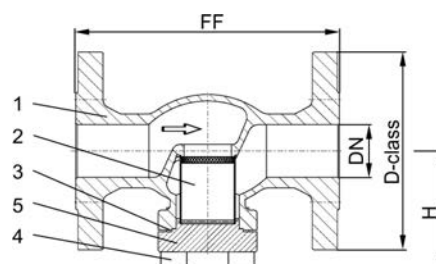

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 08431 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	62	69	69	89	89	125	150	166	212
Weight	ca. kg	2.5	3.0	4.0	8.1	10.6	17.7	23.2	36.8	76.9
Kvs-Value	m ³ /h	4.3	6.7	9.5	21.0	28.0	62.0	90.0	118.0	on request
Cv-Value	gal/min	5.0	7.8	11.0	24.3	32.4	71.7	104.0	136.4	on request

Dimensions in mm.

Strainers

Type 08417 - Strainer



Cryogenic-Strainer, PN50 (DN150=PN40)

Stainless steel body and cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08417.X.000*

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 08417.X.0004

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Strainer screen	1.4301	A 240 Grade 304
3 Bonnet gasket	PTFE	
4 Bolts	1.4301/A2	A 194 B8
5 Cap	1.4301	A 276 Grade 304

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

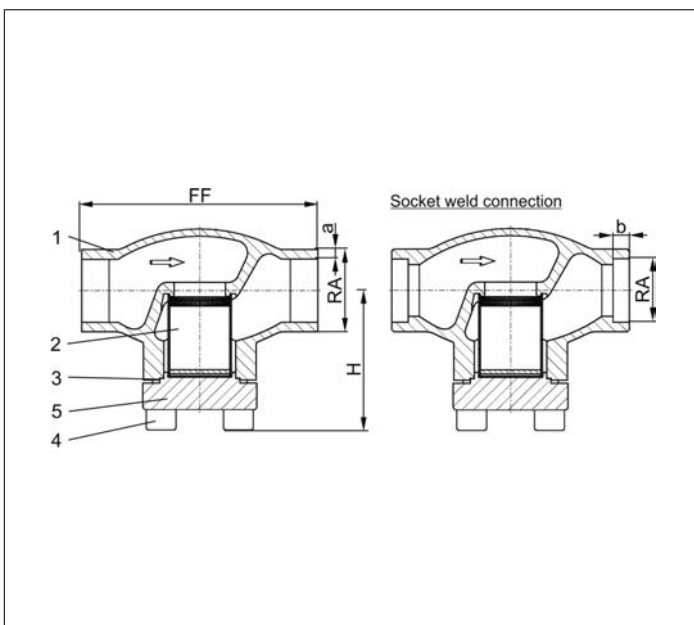

Type 08417 - Standard design	Technical data														
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100	150	
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114	0168	
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280	400	
Height	H	62	62	62	65	69	76	89	89	89	125	150	166	215	
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3	168.3	
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0	7.1	
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33	73.03	88.90	114.3	168.3	
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40													
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20	20	
Weight	ca. kg	0.6	0.75	0.8	0.9	1.2	1.8	3.1	3.1	4.7	8.9	13.6	18.0	48.0	
Kvs-Value	m³/h	1.5	3.4	3.4	6.5	9.5	14.0	19.0	21.0	28.0	62.0	90.0	118.0	300.0	
Cv-Value	gal/mii	1.7	3.9	3.9	7.5	11.0	16.2	22.0	24.3	32.4	71.7	104.0	136.4	346.8	

Dimensions in mm.

Strainers

Type 08417 - Strainer



Cryogenic-Strainer, PN25

Stainless steel body and cap
with strainer screen mesh size 0.25 mm

Part No. 08417.0219.0004

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Strainer screen	1.4301	A 240 Grade 304
3 Bonnet gasket	PTFE	
4 Bolts	1.4301/A2	A 194 B8
5 Cap	1.4301	A 276 Grade 304

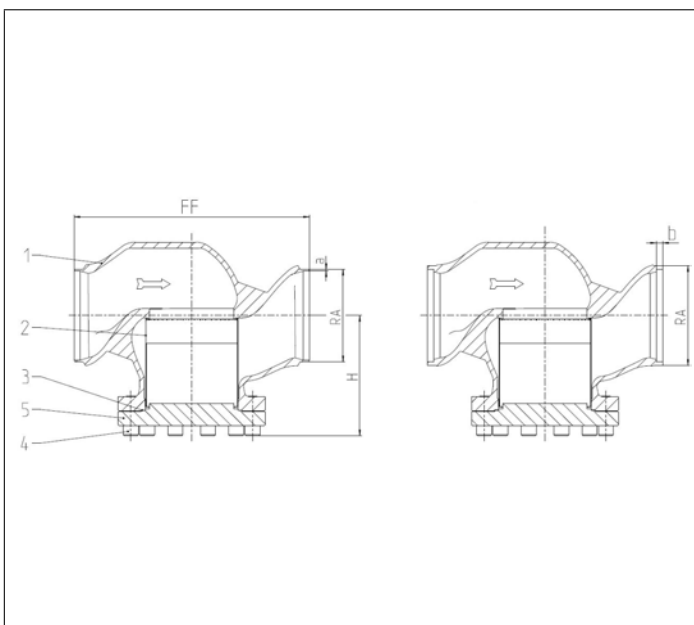

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 08417 - Standard design	Technical data	
Nominal size	DN	200
Dimension code	.X.	0219
Face-to-face dimension	FF	560
Height	H	285
Outside pipe-Ø ISO 1127	RA	219.1
Wall thickness pipe ISO 1127	a	6.3
Outside pipe-Ø ASTM A312	RA	219.1
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40
Socket depth	b	15
Weight	ca. kg	100
Kvs-Value	m ³ /h	560
Cv-Value	gal/min	655

Dimensions in mm.

Strainers

Type 08416 - Strainer



Cryogenic-Strainer, PN50

Stainless steel body and cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08416.X.0001

Female thread connection (G) acc. to ISO 228/1

Part No. 08416.X.0006

Female thread connection NPT acc. to ANSI B 1.20.1

Available options - on request only:

- Female thread connection (R) acc. to ISO 7-Rc
- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Strainer screen	1.4301	A 240 Grade 304
3 Bonnet gasket	PTFE	
4 Bolts	1.4301/A2	A 194 B8
5 Cap	1.4301	A 276 Grade 304

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

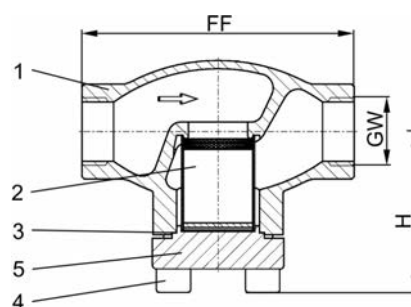

Type 08416 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	40	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	70	70	85	100	115	130	130	155
Height	H	62	62	62	65	69	89	89	89
Weight	ca. kg	0.6	0.6	0.8	0.9	1.2	3.1	3.1	4.7
Kvs-Value	m ³ /h	1.5	1.5	3.4	6.5	9.5	19.0	21.0	28.0
Cv-Value	gal/min	1.7	1.7	3.9	7.5	11.0	22.0	24.3	32.4

Dimensions in mm.

Strainers

Type 08432 - Strainer, DIN EN Flanges



Cryogenic-Strainer, PN40


Stainless steel body and cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08432.X.0002

Flanged connection acc. to DIN EN 1092-1 PN40

Available options - on request only:

- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities

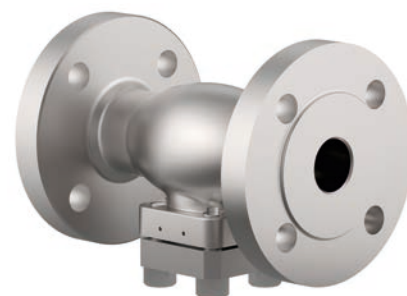


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Strainer screen	1.4301	A 240 Grade 304
3 Bonnet gasket	PTFE	
4 Bolts	1.4301/A2	A 194 B8
5 Cap	1.4301	A 276 Grade 304

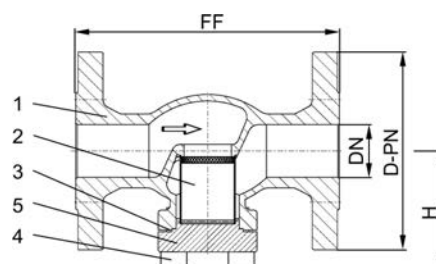

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 08432 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	62	69	69	89	89	125	150	166	212
Weight	ca. kg	2.5	3.0	4.0	5.6	10.6	17.7	23.2	36.8	68.1
Kvs-Value	m ³ /h	4.3	6.7	9.5	21.0	28.0	62.0	90.0	118.0	on request
Cv-Value	gal/min	5.0	7.8	11.0	24.3	32.4	71.7	104.0	136.4	on request

Dimensions in mm.

Strainers

Type 08432 - Strainer, ANSI Flanges



Cryogenic-Strainer, class 300


Stainless steel body and cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08432.X.0003

Flanged connection acc. to ANSI B16.5 class 300

Available options - on request only:

- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities

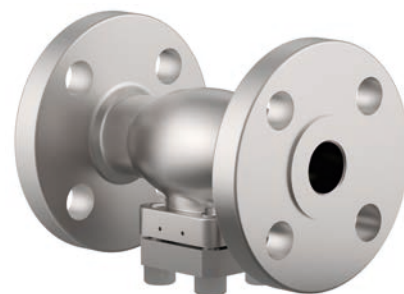


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Strainer screen	1.4301	A 240 Grade 304
3 Bonnet gasket	PTFE	
4 Bolts	1.4301/A2	A 194 B8
5 Cap	1.4301	A 276 Grade 304

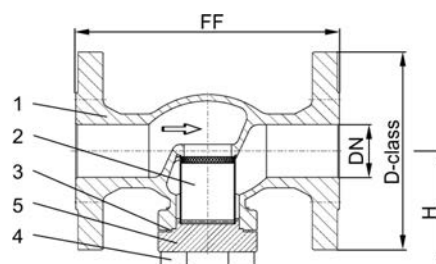

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 08432 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	62	69	69	89	89	125	150	166	212
Weight	ca. kg	2.5	3.0	4.0	5.6	10.6	17.7	23.2	36.8	85.7
Kvs-Value	m³/h	4.3	6.7	9.5	21.0	28.0	62.0	90.0	118.0	on request
Cv-Value	gal/min	5.0	7.8	11.0	24.3	32.4	71.7	104.0	136.4	on request

Dimensions in mm.

Strainers

Type 08432 - Strainer, ANSI Flanges



Cryogenic-Strainer, class 150


Stainless steel body and cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08432.X.0001

Flanged connection acc. to ANSI B16.5 class 150

Available options - on request only:

- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities

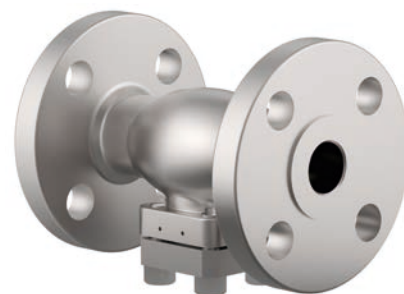


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Strainer screen	1.4301	A 240 Grade 304
3 Bonnet gasket	PTFE	
4 Bolts	1.4301/A2	A 194 B8
5 Cap	1.4301	A 276 Grade 304

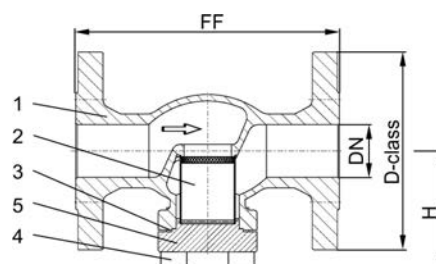

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 08432 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	62	69	69	89	89	125	150	166	212
Weight	ca. kg	2.5	3.0	4.0	5.6	10.6	17.7	23.2	36.8	76.9
Kvs-Value	m ³ /h	4.3	6.7	9.5	21.0	28.0	62.0	90.0	118.0	on request
Cv-Value	gal/min	5.0	7.8	11.0	24.3	32.4	71.7	104.0	136.4	on request

Dimensions in mm.

Spare Parts for Strainers

Type 30800, Type 30801 - Strainer screen, Filter



for Cryogenic-Strainer

"cleaned and degreased for oxygen service"

Part No. 30800.X.0250A2

Stainless steel strainer screen (1.4301 / A 240 Grade 304) with a mesh size of 0.25 mm or rather 56 mesh

Part No. 30800.X.0100A2

Stainless steel strainer screen (1.4301 / A 240 Grade 304) with a mesh size of 0.10 mm or rather 140 mesh

Part No. 30800.X.0250A4

Stainless steel strainer screen (1.4404 / A 276 Grade 316L) with a mesh size of 0.25 mm or rather 56 mesh

Part No. 30800.X.0250M

Monel strainer screen (2.4360 / SB 164 - N04400) with a mesh size of 0.25 mm or rather 56 mesh

Part No. 30800.X.0150M

Monel strainer screen (2.4360 / SB 164 - N04400) with a mesh size of 0.15 mm or rather 100 mesh

Part No. 30801.X.0100B

Sintered bronze Filter (CW483K / B 427 C 90800) with a porosity of 100 µ

Part No. 30801.X.0030B

Sintered bronze Filter (CW483K / B 427 C 90800) with a porosity of 30 µ

suitable for:



Type	Nominal size
08412, 08413, 08415, 08416, 08716	DN10 - DN50
08414, 08417	DN10 - DN200
08431, 08432	DN25 - DN100
08717	DN10 - DN150

consisting of:

- 1x Strainer screen or Filter (materials see above)
- 1x Spring ring (1.4568)
- 1x Bonnet gasket (PTFE)

Available options - on request only:

- Further mesh sizes / porosities

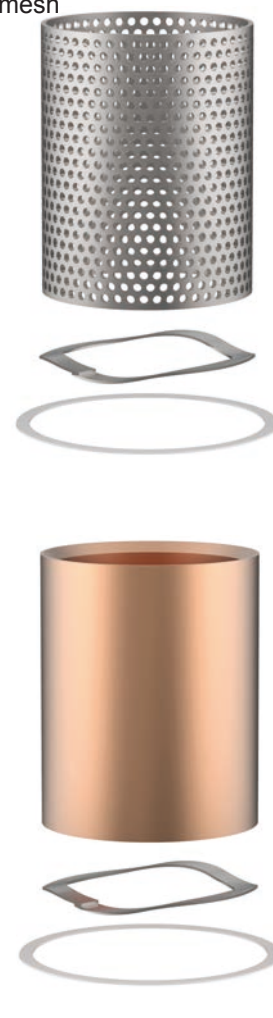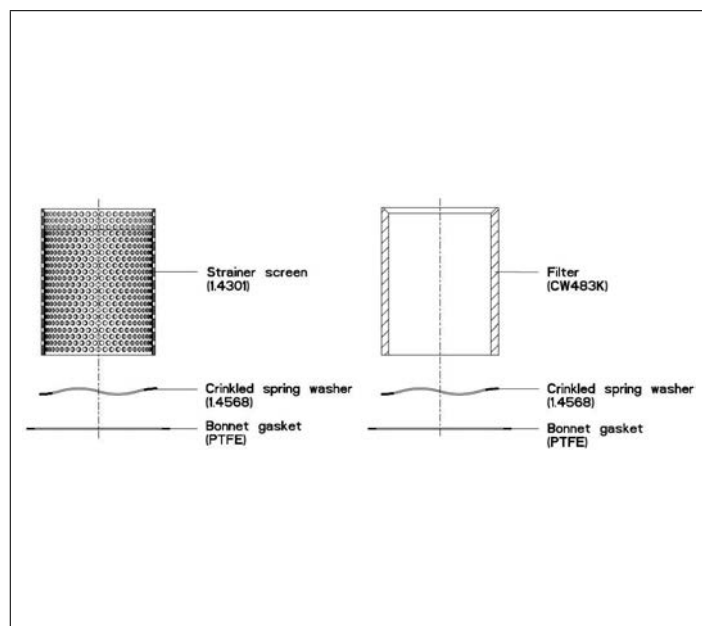

Type 30800, 30801	Technical Data												
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150	200
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500	2000
Weight	ca. kg	0.03	0.03	0.04	0.05	0.07	0.08	0.13	0.18	0.24	0.32	0.68	0.92
Kvs - Value MS 0.25	m³/h	2.8	3.6	6.4	9.0	14.5	21.0	30.0	56.0	85.0	115.0	o.r.	o.r.
Cv - Value MS 0.25	gal/min	3.2	4.1	7.4	10.4	16.8	24.3	34.8	64.9	98.6	133.4	o.r.	o.r.
Kvs - Value MS 0.15	m³/h	2.8	3.6	6.4	9.0	o.r.	21.0	29.5	o.r.	o.r.	o.r.	o.r.	o.r.
Cv - Value MS 0.15	gal/min	3.2	4.1	7.4	10.4	o.r.	24.3	34.2	o.r.	o.r.	o.r.	o.r.	o.r.
Kvs - Value MS 0.10	m³/h	o.r.*	o.r.	o.r.	9.0	14.0	19.0	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.
Cv - Value MS 0.10	gal/min	o.r.	o.r.	o.r.	10.4	16.2	22.0	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.
Kvs - Value 100µ	m³/h	2.8	3.3	6.0	7.0	o.r.	13.5	18.5	o.r.	o.r.	o.r.	o.r.	o.r.
Cv - Value 100µ	gal/min	3.2	3.8	6.9	8.1	o.r.	15.6	21.4	o.r.	o.r.	o.r.	o.r.	o.r.
Kvs - Value 30µ	m³/h	o.r.	1.7	3.5	4.0	o.r.	6.5	11.0	o.r.	o.r.	o.r.	o.r.	o.r.
Cv - Value 30µ	gal/min	o.r.	1.9	4.0	4.6	o.r.	7.5	12.7	o.r.	o.r.	o.r.	o.r.	o.r.

*o.r. = on request. Dimensions in mm.

Safety Valves

Type 06001 - gastight



Cryogenic Safety Valves, angle type, brass, PN63, type tested TÜV-SV.1048. S/G/L

Standard Safety Valve,
complete with carbon filled PTFE valve seal, closed bonnet, gastight
Outlet: female thread Rc 3/8 acc. to ISO 7/1
"cleaned and degreased for oxygen service"

Part No. 06001.X.0000

Inlet: male thread type R (BSPT) acc. to ISO 7/1

Part No. 06001.X.2000

Inlet: male thread type G (BSPP) acc. to ISO 228/1

Part No. 06001.X.5000

Inlet: male thread NPT acc. to ANSI B 1.20.1

Available options - on request only:

- with installed elbow at the outlet




Applications:

Provided as safety device for protection against thermal expansion in pipeworks and parts of facilities.

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +65°C / +149°F (338K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Body	CW617N	EN12165 CW617N Code Case 1750
2 Disc	PTFE / Carbon filled (25%)	
3 Guide plate	CW614N	EN12164 CW614N Code Case 1750
4 Stem	CW614N	EN12164 CW614N Code Case 1750
5 Spring	1.4571	A 313 Grade 316Ti
6 Bonnet	CW614N	EN12164 CW614N Code Case 1750
7 Spring clamp	CW614N	EN12164 CW614N Code Case 1750
8 Thread ring	CW614N	EN12164 CW614N Code Case 1750
9 Cap	CW614N	EN12164 CW614N Code Case 1750

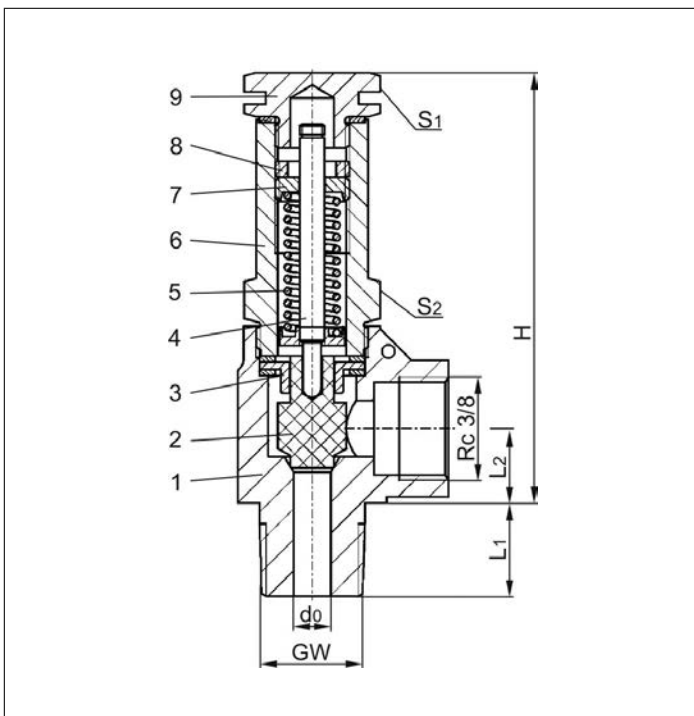

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 06001	Technical data			
Nominal size	GW	1/4	3/8	1/2
Orifice	d ₀	6.0	6.0	6.0
Dimension code	.X.	0200	0300	0400
Set pressure range	bar	5.0-55.0	5.0-55.0	5.0-55.0
Height	H	70	70	70
Length	L ₁	13	15	17
Length	L ₂	13	13	13
Wrench size across flats	S ₁	19	19	19
Wrench size across flats	S ₂	19	19	19
Weight	ca. kg	0.18	0.195	0.21
Coefficient of discharge	α _w	0.09	0.09	0.09

Dimensions in mm.

Safety Valves

Type 06001 - gastight



Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Water in kg/h

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Set pressure in bar (g)	GW	1/4, 3/8 & 1/2	1/4, 3/8 & 1/2
	d ₀ (mm)	6.0	6.0
	A ₀ (mm ²)	28.3	28.3
	Medium	Air	Water
5.0		11	304
6.0		13	333
7.0		15	360
8.0		17	384
9.0		19	408
10.0		21	430
12.0		25	471
14.0		29	508
16.0		33	544
18.0		36	577
20.0		41	608
22.0		45	637
24.0		48	666
26.0		52	693
28.0		56	719
30.0		61	744
32.0		65	769
34.0		68	792
36.0		72	815
38.0		76	838
40.0		81	859
42.0		85	881
44.0		89	901
46.0		93	922
48.0		97	941
50.0		102	961
52.0		106	980
54.0		110	999
55.0		112	1008

Safety Valves

Type 06002, Type 06006

HEROSE



Cryogenic Safety Valves, angle type, brass, PN63, type tested TÜV-SV.1048. S/G

Standard safety valve, with carbon filled PTFE valve seal

Outlet: female thread Rc 3/8 acc. to ISO 7/1, "cleaned and degreased for oxygen service"

Type 06002: Closed bonnet drainage hole in the locking screw

Type 06006: drainage hole in bonnet

Part No. 06002.X.0000

Part No. 06006.X.0000 (with lifting device)

Inlet: male thread type R (BSPT) acc. to ISO 7/1

Part No. 06002.X.2000

Part No. 06006.X.2000 (with lifting device)

Inlet: male thread type G (BSPP) acc. to ISO 228/1

Part No. 06002.X.5000

Part No. 06006.X.5000 (with lifting device)

Inlet: male thread NPT acc. to ANSI B 1.20.1

Available options - on request only:

· with installed elbow at the outlet




Applications:

Provided as safety device for protection against thermal expansion in pipeworks and parts of facilities.

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +150°C / +302°F (423K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Body	CW617N	EN12165 CW617N Code Case 1750
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW452K	B 103 UNS C51900
4 Guide plate	CC493K	SB 505 C93200
5 Stem	CW614N	EN12164 CW614N Code Case 1750
6 Spring	1.4571	A 313 Grade 316Ti
7 Bonnet	CW614N	EN12164 CW614N Code Case 1750
8 Spring clamp	CW614N	EN12164 CW614N Code Case 1750
9 Thread ring	CW614N	EN12164 CW614N Code Case 1750
10 Cap	CW614N	EN12164 CW614N Code Case 1750
11 Lifting device	CW614N	EN12164 CW614N Code Case 1750
12 Closing cap	CW507L	B 30 UNS C27000

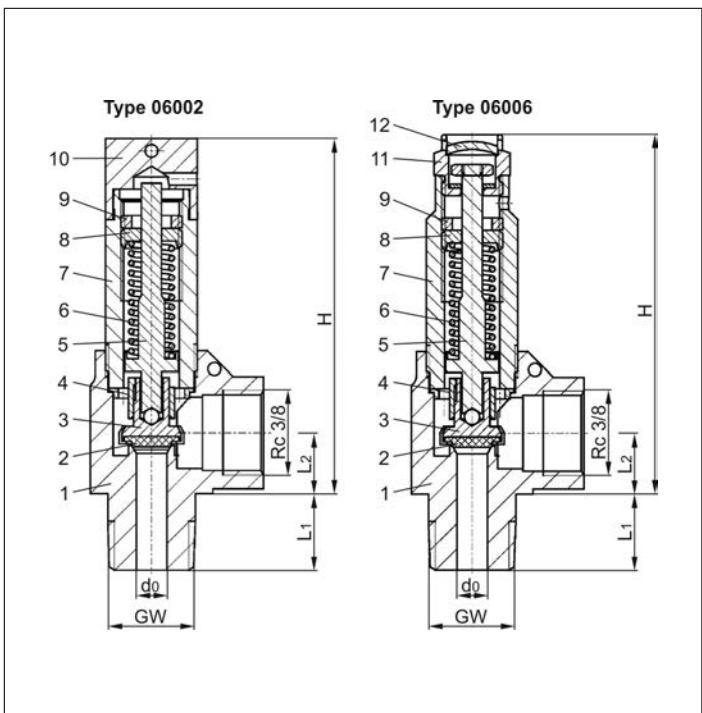

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED) and ASME Code Section VIII.



UV

Technical data		Type 06002			Type 06006		
Nominal size	GW	1/4	3/8	1/2	1/4	3/8	1/2
Orifice	d ₀	6.0	6.0	6.0	6.0	6.0	6.0
Dimension code	.X.	0200	0300	0400	0200	0300	0400
Set pressure range	bar	1.0-55.0	1.0-55.0	1.0-55.0	1.0-55.0	1.0-55.0	1.0-55.0
Height	H	70	70	70	72	72	72
Length	L ₁	13	15	17	13	15	17
Length	L ₂	13	13	13	13	13	13
Weight	ca. kg	0.185	0.20	0.22	0.18	0.195	0.21
Coeff. of discharge from 3.0 bar	α _w	0.42	0.42	0.42	0.42	0.42	0.42

Dimensions in mm.

Safety Valves

Type 06002, Type 06006



Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/4, 3/8 & 1/2
	d ₀ (mm)	6.0
	A ₀ (mm ²)	28.3
	Medium	Air in m ³ /h
1.0		15
2.0		26
3.0		35
4.0		44
5.0		53
6.0		62
7.0		71
8.0		80
9.0		89
10.0		98
12.0		116
14.0		134
16.0		152
18.0		170
20.0		190
22.0		208
24.0		226
26.0		244
28.0		262
30.0		283
32.0		301
34.0		320
36.0		338
38.0		356
40.0		378
42.0		396
44.0		415
46.0		433
48.0		452
50.0		474
52.0		493
54.0		511
55.0		521

Set pressure in psig	GW	1/4, 3/8 & 1/2
	d ₀ (inch)	0.236
	A ₀ (in ²)	0.044
	Medium	Air in SCFM
72		32
80		35
90		38
100		42
110		46
120		49
130		53
140		57
150		61
160		64
170		68
180		72
190		75
200		79
225		88
250		98
275		107
300		116
325		125
350		135
375		144
400		153
425		163
450		172
475		181
500		190
525		200
550		209
575		218
600		227
625		237
650		246
675		255
700		264
725		274
750		283
775		292
798		301

Safety Valves

Type 06002 - gastight



Cryogenic Safety Valves, angle type, brass, PN63, type tested TÜV-SV.1048. S/G

Standard Safety Valve,
gastight, closed bonnet

with carbon filled PTFE valve seal

Outlet: female thread Rc 3/8 acc. to ISO 7/1

"cleaned and degreased for oxygen service"

Part No. 06002.X.0020

Inlet: male thread type R (BSPT) acc. to ISO 7/1

Part No. 06002.X.2020

Inlet: male thread type G (BSPP) acc. to ISO 228/1

Part No. 06002.X.5020

Inlet: male thread NPT acc. to ANSI B 1.20.1

Available options - on request only:

· with installed elbow at the outlet



Applications:

Provided as safety device for protection against thermal expansion in pipeworks and parts of facilities.


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +150°C / +302°F (423K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Body	CW617N	EN12165 CW617N Code Case 1750
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW452K	B 103 UNS C51900
4 Guide plate	CC493K	SB 505 C93200
5 Stem	CW614N	EN12164 CW614N Code Case 1750
6 Spring	1.4571	A 313 Grade 316Ti
7 Bonnet	CW614N	EN12164 CW614N Code Case 1750
8 Spring clamp	CW614N	EN12164 CW614N Code Case 1750
9 Thread ring	CW614N	EN12164 CW614N Code Case 1750
10 Cap	CW614N	EN12164 CW614N Code Case 1750

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED) and ASME Code Section VIII.

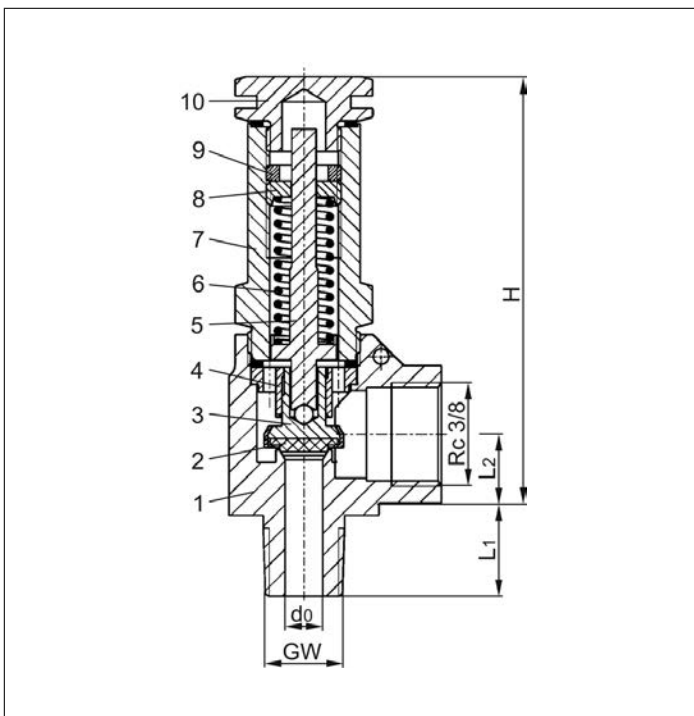

Type 06002	Technical data			
Nominal size	GW	1/4	3/8	1/2
Orifice	d ₀	6.0	6.0	6.0
Dimension code	.X.	0200	0300	0400
Set pressure range	bar	1.0-55.0	1.0-55.0	1.0-55.0
Height	H	70	70	70
Length	L ₁	13	15	17
Length	L ₂	13	13	13
Weight	ca. kg	0.18	0.20	0.22
Coefficient of discharge	α _w	0.34	0.34	0.34

Dimensions in mm.

Safety Valves

Type 06002 - gastight



Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/4, 3/8 & 1/2
	d ₀ (mm)	6.0
	A ₀ (mm ²)	28.3
	Medium	Air in m ³ /h
1.0		13
2.0		20
3.0		28
4.0		36
5.0		43
6.0		50
7.0		57
8.0		65
9.0		72
10.0		79
12.0		94
14.0		108
16.0		123
18.0		138
20.0		154
22.0		168
24.0		183
26.0		198
28.0		212
30.0		229
32.0		244
34.0		259
36.0		274
38.0		288
40.0		306
42.0		321
44.0		336
46.0		351
48.0		366
50.0		384
52.0		399
54.0		414
55.0		421

Set pressure in psig	GW	1/4, 3/8 & 1/2
	d ₀ (inch)	0.236
	A ₀ (in ²)	0.044
	Medium	Air in SCFM
74		29
80		31
90		34
100		38
110		41
120		44
130		48
140		51
150		54
160		58
170		61
180		64
190		68
200		71
225		79
250		87
275		96
300		104
325		112
350		121
375		129
400		137
425		146
450		154
475		162
500		171
525		179
550		187
575		195
600		204
625		212
650		220
675		229
700		237
725		245
750		254
775		262
798		270

Safety Valves

Type 06011 - gastight



Cryogenic Safety Valves, angle type, stainless steel, PN63, type tested TÜV-SV.1048. S/G/L

Standard safety valve,
complete with carbon filled PTFE valve seal, closed bonnet, gastight
Outlet: female thread Rc 3/8 acc. to ISO 7/1
"cleaned and degreased for oxygen service"

Part No. 06011.X.0000

Inlet: male thread type R (BSPT) acc. to ISO 7/1

Part No. 06011.X.2000

Inlet: male thread type G (BSPP) acc. to ISO 228/1

Part No. 06011.X.5000

Inlet: male thread NPT acc. to ANSI B 1.20.1

Available options - on request only:

- with installed elbow at the outlet




Applications:

Provided as safety device for protection against thermal expansion in pipeworks and parts of facilities.

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +65°C / +149°F (338K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Body	1.4408	A 351 CF8M
2 Disc	PTFE / Carbon filled (25%)	
3 Guide plate	1.4301	A 276 Grade 304
4 Stem	1.4301	A 276 Grade 304
5 Spring	1.4571	A 313 Grade 316Ti
6 Bonnet	1.4301	A 276 Grade 304
7 Spring clamp	1.4305	A 276 Grade 303
8 Thread ring	1.4305	A 276 Grade 303
9 Cap	1.4301	A 276 Grade 304

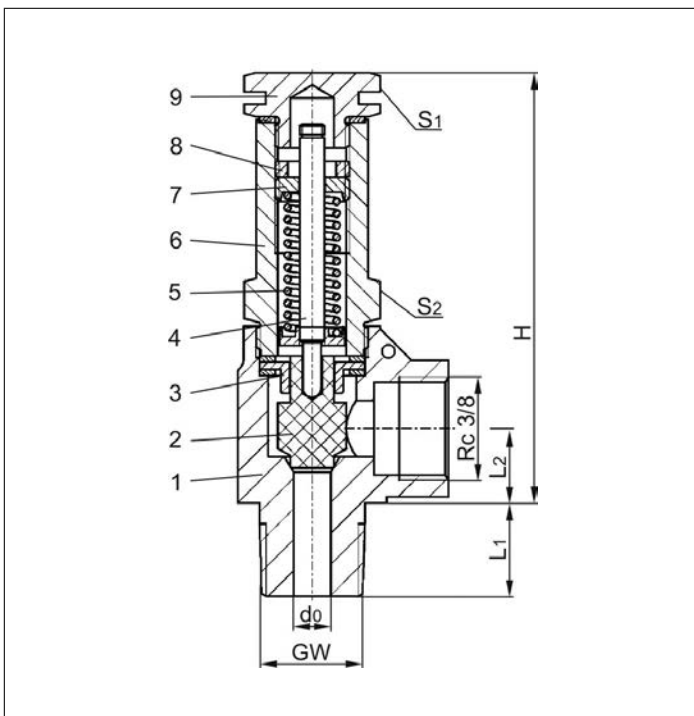

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 06011	Technical data			
Nominal size	GW	1/4	3/8	1/2
Orifice	d ₀	6.0	6.0	6.0
Dimension code	.X.	0200	0300	0400
Set pressure range	bar	5.0-55.0	5.0-55.0	5.0-55.0
Height	H	70	70	70
Length	L ₁	13	15	17
Length	L ₂	13	13	13
Wrench size across flats	S ₁	19	19	19
Wrench size across flats	S ₂	19	19	19
Weight	ca. kg	0.18	0.195	0.21
Coefficient of discharge	α _w	0.09	0.09	0.09

Dimensions in mm.

Safety Valves

Type 06011 - gastight



Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Water in kg/h

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Set pressure in bar (g)	GW	1/4, 3/8 & 1/2	1/4, 3/8 & 1/2
	d ₀ (mm)	6.0	6.0
	A ₀ (mm ²)	28.3	28.3
	Medium	Air	Water
5.0		11	304
6.0		13	333
7.0		15	360
8.0		17	384
9.0		19	408
10.0		21	430
12.0		25	471
14.0		29	508
16.0		33	544
18.0		36	577
20.0		41	608
22.0		45	637
24.0		48	666
26.0		52	693
28.0		56	719
30.0		61	744
32.0		65	769
34.0		68	792
36.0		72	815
38.0		76	838
40.0		81	859
42.0		85	881
44.0		89	901
46.0		93	922
48.0		97	941
50.0		102	961
52.0		106	980
54.0		110	999
55.0		112	1008

Safety Valves

Type 06012, Type 06016

HEROSE



Cryogenic Safety Valves, angle type, stainless steel, PN63, type tested TÜV-SV.1048. S/G

Standard safety valve, with carbon filled PTFE valve seal, open bonnet

Outlet: female thread Rc 3/8 acc. to ISO 7/1, "cleaned and degreased for oxygen service"

Type 06012: Closed bonnet drainage hole in the locking screw

Type 06016: drainage hole in the bonnet

Part No. 06012.X.0000:

Part No. 06016.X.0000 (with lifting device)

Inlet: male thread type R (BSPT) acc. to ISO 7/1

Part No. 06012.X.2000

Part No. 06016.X.2000 (with lifting device)

Inlet: male thread type G (BSPP) acc. to ISO 228/1

Part No. 06012.X.5000

Part No. 06016.X.5000 (with lifting device)

Inlet: male thread NPT acc. to ANSI B 1.20.1

Available options - on request only:

· with installed elbow at the outlet



Applications:

Provided as safety device for protection against thermal expansion in pipeworks and parts of facilities.


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +150°C / +302°F (423K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Body	1.4408	SA 351 CF8M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	SA 479 Grade 304
4 Guide plate	1.4301	SA 479 Grade 304
5 Stem	1.4301	SA 479 Grade 304
6 Spring	1.4571	SA 313 Grade 316Ti
7 Bonnet	1.4301	SA 479 Grade 304
8 Spring clamp	1.4305	SA 314 Grade 303
9 Thread ring	1.4305	SA 314 Grade 303
10 Cap	1.4301	SA 479 Grade 304
11 Lifting device	1.4305	SA 479 Grade 303
12 Closing cap	1.4305	SA 479 Grade 303

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED) and ASME Code Section VIII.

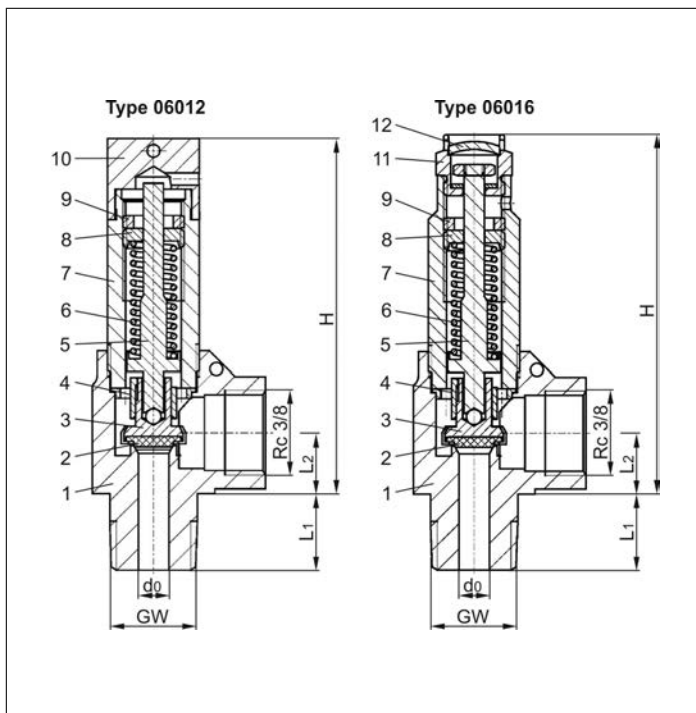

Technical data		Type 06012			Type 06016		
Nominal size	GW	1/4	3/8	1/2	1/4	3/8	1/2
Orifice	d ₀	6.0	6.0	6.0	6.0	6.0	6.0
Dimension code	.X.	0200	0300	0400	0200	0300	0400
Set pressure range	bar	1.0-55.0	1.0-55.0	1.0-55.0	1.0-55.0	1.0-55.0	1.0-55.0
Height	H	70	70	70	72	72	72
Length	L ₁	13	15	17	13	15	17
Length	L ₂	13	13	13	13	13	13
Weight	ca. kg	0.185	0.20	0.22	0.18	0.195	0.21
Coeff. of discharge from 3.0 bar	α _w	0.42	0.42	0.42	0.42	0.42	0.42

Dimensions in mm.

Safety Valves

Type 06012, Type 06016



Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/4, 3/8 & 1/2
	d ₀ (mm)	6.0
	A ₀ (mm ²)	28.3
	Medium	Air in m³/h
1.0		15
2.0		26
3.0		35
4.0		44
5.0		53
6.0		62
7.0		71
8.0		80
9.0		89
10.0		98
12.0		116
14.0		134
16.0		152
18.0		170
20.0		190
22.0		208
24.0		226
26.0		244
28.0		262
30.0		283
32.0		301
34.0		320
36.0		338
38.0		356
40.0		378
42.0		396
44.0		415
46.0		433
48.0		452
50.0		474
52.0		493
54.0		511
55.0		521

Set pressure in psig	GW	1/4, 3/8 & 1/2
	d ₀ (inch)	0.236
	A ₀ (in ²)	0.044
	Medium	Air in SCFM
72		32
80		35
90		38
100		42
110		46
120		49
130		53
140		57
150		61
160		64
170		68
180		72
190		75
200		79
225		88
250		98
275		107
300		116
325		125
350		135
375		144
400		153
425		163
450		172
475		181
500		190
525		200
550		209
575		218
600		227
625		237
650		246
675		255
700		264
725		274
750		283
775		292
798		301

Safety Valves

Type 06012 - gastight



Cryogenic Safety Valves, angle type, stainless steel, PN63, type tested TÜV-SV.1048. S/G

Standard Safety Valve,
gastight, closed bonnet

with carbon filled PTFE valve seal

Outlet: female thread Rc 3/8 acc. to ISO 7/1

"cleaned and degreased for oxygen service"

Part No. 06012.X.0020

Inlet: male thread type R (BSPT) acc. to ISO 7/1

Part No. 06012.X.2020

Inlet: male thread type G (BSPP) acc. to ISO 228/1

Part No. 06012.X.5020

Inlet: male thread NPT acc. to ANSI B 1.20.1

Available options - on request only:

· with installed elbow at the outlet




Applications:

Provided as safety device for protection against thermal expansion in pipeworks and parts of facilities.

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +150°C / +302°F (423K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Body	1.4408	SA 351 CF8M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	SA 479 Grade 304
4 Guide plate	1.4301	SA 479 Grade 304
5 Stem	1.4301	SA 479 Grade 304
6 Spring	1.4571	SA 313 Grade 316Ti
7 Bonnet	1.4301	SA 479 Grade 304
8 Spring clamp	1.4305	SA 314 Grade 303
9 Thread ring	1.4305	SA 314 Grade 303
10 Cap	1.4301	SA 479 Grade 304

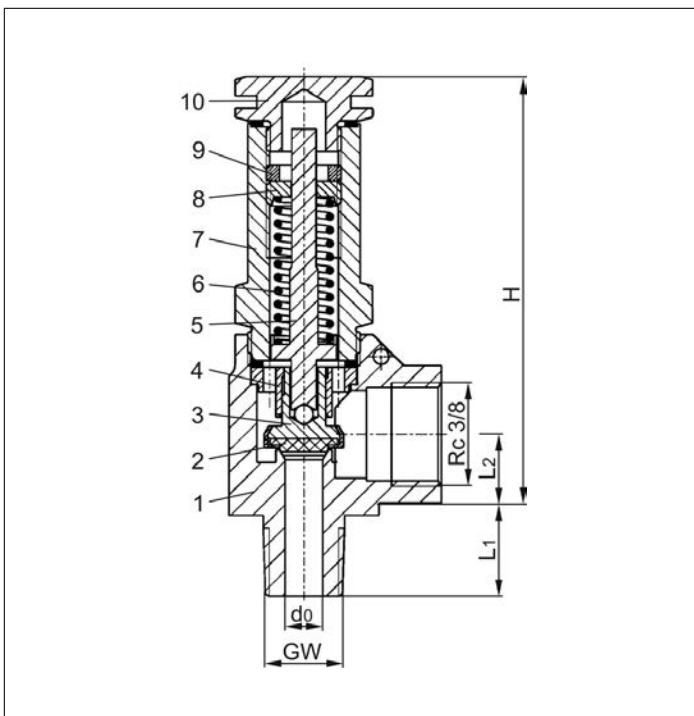

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED) and ASME Code Section VIII.



Type 06012	Technical data			
Nominal size	GW	1/4	3/8	1/2
Orifice	d ₀	6.0	6.0	6.0
Dimension code	.X.	0200	0300	0400
Set pressure range	bar	1.0-55.0	1.0-55.0	1.0-55.0
Height	H	70	70	70
Length	L ₁	13	15	17
Length	L ₂	13	13	13
Weight	ca. kg	0.18	0.20	0.22
Coefficient of discharge	α _w	0.34	0.34	0.34

Dimensions in mm.

Safety Valves

Type 06012 - gastight



Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/4, 3/8 & 1/2
	d ₀ (mm)	6.0
	A ₀ (mm ²)	28.3
	Medium	Air in m ³ /h
1.0		13
2.0		20
3.0		28
4.0		36
5.0		43
6.0		50
7.0		57
8.0		65
9.0		72
10.0		79
12.0		94
14.0		108
16.0		123
18.0		138
20.0		154
22.0		168
24.0		183
26.0		198
28.0		212
30.0		229
32.0		244
34.0		259
36.0		274
38.0		288
40.0		306
42.0		321
44.0		336
46.0		351
48.0		366
50.0		384
52.0		399
54.0		414
55.0		421

Set pressure in psig	GW	1/4, 3/8 & 1/2
	d ₀ (inch)	0.236
	A ₀ (in ²)	0.044
	Medium	Air in SCFM
74		29
80		31
90		34
100		38
110		41
120		44
130		48
140		51
150		54
160		58
170		61
180		64
190		68
200		71
225		79
250		87
275		96
300		104
325		112
350		121
375		129
400		137
425		146
450		154
475		162
500		171
525		179
550		187
575		195
600		204
625		212
650		220
675		229
700		237
725		245
750		254
775		262
798		270

Safety Valves

Type 06474



Cryogenic Safety Valves, angle type, bronze, PN63, type tested TÜV-SV.836. S/G

Standard safety valve,

with carbon filled PTFE valve seal, closed bonnet

Outlet: female thread G 1/2 acc. to ISO 228/1

"cleaned and degreased for oxygen service"

Part No. 06474.X.0000

Part No. 06474.0600.9000

Inlet: male thread type G (BSPP) acc. to ISO 228/1

Part No. 06474.X.5000

Inlet: male thread NPT acc. to ANSI B 1.20.1

Part No. 06474.0600.0000

Inlet: union type weld/braze fitting for pipe outside diameter 12mm

Available options - on request only:

- external parts nickel plated
- with installed elbow at the outlet




Applications:

Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +150°C / +302°F (423K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Outlet body	CC491K	B 62 UNS C83600
2 Inlet body	1.4301	A 276 Grade 304
3 Valve seal	PTFE / Carbon filled (25%)	
4 Disc	CW452K	B 159 UNS C51900
5 Guide plate	CC493K	B 505 UNS C93200
6 Stem	CW614N	B 283 UNS C38500
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4301	A 276 Grade 304
9 Spring clamp	CW614N	B 283 UNS C38500
10 Thread ring	CW614N	B 283 UNS C38500
11 Cap	CW614N	B 283 UNS C38500
15 Weld/Braze fitting	1.4301	A 276 Grade 304
16 Union nut	CW614N	B 283 UNS C38500

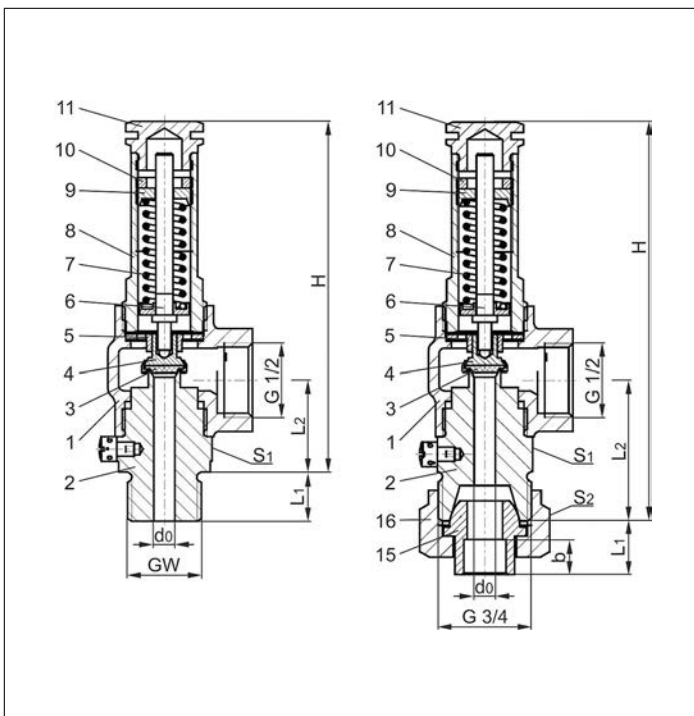

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 06474	Technical data				
Nominal size	GW	1/4	3/8	1/2	3/4
Orifice	d ₀	6.0	6.0	6.0	6.0
Dimension code	.X.	0200	0300	0400	0600
Set pressure range	bar	0.4-55.0	0.4-55.0	0.4-55.0	0.4-55.0
Height	H	100	100	100	114
Length	L ₁	12	13	14	15.5
Length	L ₂	26	26	26	40
Socket depth	b	-	-	-	10
Wrench size across flats	S ₁	27	27	27	27
Wrench size across flats	S ₂	-	-	-	32
Weight	ca. kg	0.34	0.36	0.38	0.48
Coefficient of discharge	α _w	0.66	0.66	0.66	0.66

Dimensions in mm.

Safety Valves

Type 06474



Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

Air in m³/h at 0°C and 1013.25 mbar

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Set pressure in bar (g)	GW	1/4	3/8	1/2	3/4
	d ₀ (mm)	6.0	6.0	6.0	6.0
	A ₀ (mm ²)	28.3	28.3	28.3	28.3
	Medium	Air			
0.4		14	14	14	14
0.5		16	16	16	16
0.6		18	18	18	18
0.7		19	19	19	19
0.8		21	21	21	21
0.9		22	22	22	22
1.0		23	23	23	23
1.5		31	31	31	31
2.0		39	39	39	39
2.5		47	47	47	47
3.0		54	54	54	54
4.0		69	69	69	69
5.0		83	83	83	83
6.0		97	97	97	97
7.0		111	111	111	111
8.0		126	126	126	126
9.0		140	140	140	140
10.0		154	154	154	154
12.0		182	182	182	182
14.0		211	211	211	211
16.0		239	239	239	239
18.0		267	267	267	267
20.0		298	298	298	298
22.0		327	327	327	327
24.0		355	355	355	355
26.0		384	384	384	384
28.0		412	412	412	412
30.0		445	445	445	445
32.0		474	474	474	474
34.0		502	502	502	502
36.0		531	531	531	531
38.0		560	560	560	560
40.0		594	594	594	594
42.0		623	623	623	623
44.0		652	652	652	652
46.0		681	681	681	681
48.0		710	710	710	710
50.0		745	745	745	745
55.0		818	818	818	818

Cryogenic Safety Valves, angle type, bronze, PN63, type tested TÜV-SV.836. S/G

Standard safety valve,
with carbon filled PTFE valve seal, closed bonnet, with lifting device

Outlet: female thread G 1/2 acc. to ISO 228/1

"cleaned and degreased for oxygen service"

Part No. 06478.X.0000

Part No. 06478.0600.9000

Inlet: male thread type G (BSPP) acc. to ISO 228/1

Part No. 06478.X.5000

Inlet: male thread NPT acc. to ANSI B 1.20.1

Part No. 06478.0600.0000

Inlet: union type weld/braze fitting for pipe outside diameter 12mm

Available options - on request only:

- external parts nickel plated
- with installed elbow at the outlet




Applications:

Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +150°C / +302°F (423K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Outlet body	CC491K	B 62 UNS C83600
2 Inlet body	1.4301	A 276 Grade 304
3 Valve seal	PTFE / Carbon filled (25%)	
4 Disc	CW452K	B 159 UNS C51900
5 Guide plate	CC493K	B 505 UNS C93200
6 Stem	CW614N	B 283 UNS C38500
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4301	A 276 Grade 304
9 Spring clamp	CW614N	B 283 UNS C38500
10 Thread ring	CW614N	B 283 UNS C38500
11 Lifting cap	CW614N	B 283 UNS C38500
12 Lifting spring	1.4571	A 276 Grade 316Ti
13 Lifting stem	CW614N	B 283 UNS C38500
14 Lifting device	CW614N	B 283 UNS C38500
15 Weld/Braze fitting	1.4301	A 276 Grade 304
16 Union nut	CW614N	B 283 UNS C38500

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

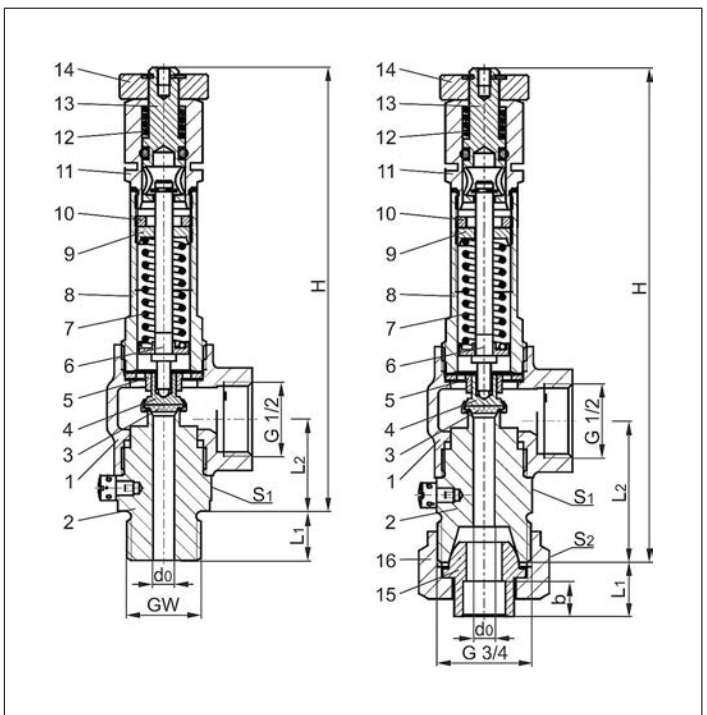

Type 06478	Technical data				
Nominal size	GW	1/4	3/8	1/2	3/4
Orifice	d ₀	6.0	6.0	6.0	6.0
Dimension code	.X.	0200	0300	0400	0600
Set pressure range	bar	0.4-55.0	0.4-55.0	0.4-55.0	0.4-55.0
Height	H	126	126	126	140
Length	L ₁	12	13	14	15.5
Length	L ₂	26	26	26	40
Socket depth	b	-	-	-	10
Wrench size across flats	S ₁	27	27	27	27
Wrench size across flats	S ₂	-	-	-	32
Weight	ca. kg	0.40	0.42	0.44	0.47
Coefficient of discharge	α _w	0.66	0.66	0.66	0.66

Dimensions in mm.

Safety Valves

Type 06478



Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

Air in m³/h at 0°C and 1013.25 mbar

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Set pressure in bar (g)	GW	1/4	3/8	1/2	3/4
	d ₀ (mm)	6.0	6.0	6.0	6.0
	A ₀ (mm ²)	28.3	28.3	28.3	28.3
	Medium	Air			
0.4		14	14	14	14
0.5		16	16	16	16
0.6		18	18	18	18
0.7		19	19	19	19
0.8		21	21	21	21
0.9		22	22	22	22
1.0		23	23	23	23
1.5		31	31	31	31
2.0		39	39	39	39
2.5		47	47	47	47
3.0		54	54	54	54
4.0		69	69	69	69
5.0		83	83	83	83
6.0		97	97	97	97
7.0		111	111	111	111
8.0		126	126	126	126
9.0		140	140	140	140
10.0		154	154	154	154
12.0		182	182	182	182
14.0		211	211	211	211
16.0		239	239	239	239
18.0		267	267	267	267
20.0		298	298	298	298
22.0		327	327	327	327
24.0		355	355	355	355
26.0		384	384	384	384
28.0		412	412	412	412
30.0		445	445	445	445
32.0		474	474	474	474
34.0		502	502	502	502
36.0		531	531	531	531
38.0		560	560	560	560
40.0		594	594	594	594
42.0		623	623	623	623
44.0		652	652	652	652
46.0		681	681	681	681
48.0		710	710	710	710
50.0		745	745	745	745
55.0		818	818	818	818



Cryogenic Safety Valves, angle type, bronze, PN40, type tested TÜV-SV.780. S/G

Standard safety valve (0.2 - 25.0/40.0 bar). **ASME certification only for d₀ 10.5**

Metal to metal seated, closed bonnet

"cleaned and degreased for oxygen service"

Part No. 06386.X.0000

Inlet: male thread type G (BSPP) acc. to ISO 228/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06386.X.2000

Inlet: male thread type R (BSPT) acc. to ISO 7/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06386.X.5000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06386.X.6000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread NPT acc. to ANSI B 1.20.1

Available options - on request only:

- external parts nickel plated
- with installed elbow at the outlet




Applications:

Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K)

Materials	DIN EN	ASME/ASTM
1 Outlet body	CC491K	B 62 UNS C83600
2 Inlet body	1.4301	A 276 Grade 304
4 Disc	1.4541	A 276 Grade 321
5 Guide plate	CW453K	B 103 UNS C52100
6 Stem	CW453K	B 103 UNS C52100
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4308	A 351 CF 8
9 Spring clamp	CW614N	B 283 UNS C38500
10 Thread ring	CW614N	B 283 UNS C38500
11 Cap	CW614N	B 283 UNS C38500

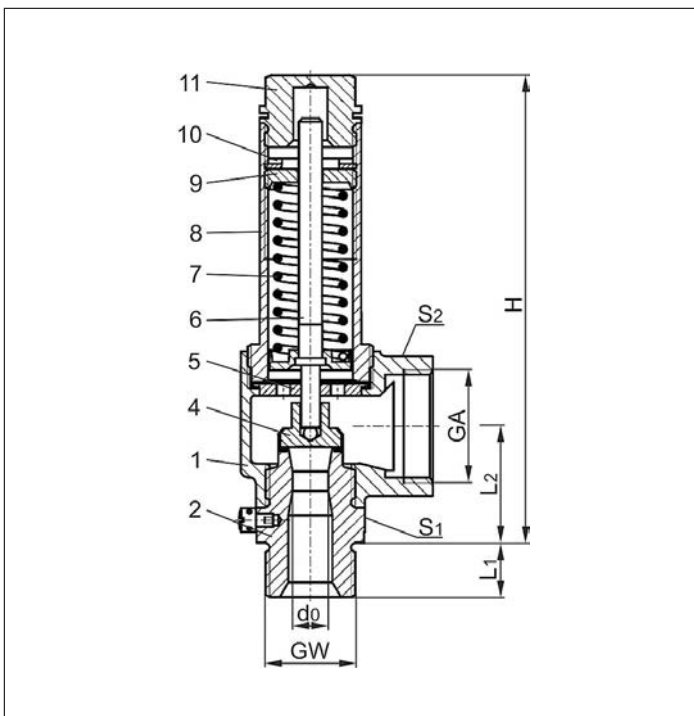

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED) and ASME Code Section VIII.



Type 06386	Technical data			
Nominal size	GW	1/2	3/4	1
Orifice	d ₀	10.5	10.5	14.0
Dimension code	.X.	1004	1006	1410
Set pressure range	bar	0.2-25.0	0.2-25.0	0.2-40.0
Outlet	GA	1	1	1-1/4
Height	H	140	140	157
Length	L ₁	14	16	18
Length	L ₂	36	36	42
Wrench size across flats	S ₁	30	30	41
Wrench size across flats	S ₂	41	41	50
Weight	ca. kg	0.75	0.78	1.24
Coeff. of discharge from 3.0 bar	α _w	0.67	0.67	0.67

Dimensions in mm.

Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/2 & 3/4	1
	d ₀ (mm)	10.5	14
	A ₀ (mm ²)	86.6	153.9
	Medium	Air in m³/h	
0.2		25	49
0.5		48	87
1.0		75	135
1.5		100	176
2.0		124	217
3.0		171	304
4.0		214	381
5.0		259	460
6.0		302	537
7.0		346	615
8.0		391	695
9.0		434	772
10.0		479	852
12.0		567	1008
14.0		655	1164
16.0		742	1320
18.0		830	1476
20.0		927	1648
22.0		1015	1805
24.0		1104	1963
25.0		1148	2041
26.0		-	2120
28.0		-	2278
30.0		-	2458
32.0		-	2617
34.0		-	2776
36.0		-	2935
38.0		-	3094
40.0		-	3281

Set pressure in psig	GW	1/2 & 3/4
	d ₀ (inch)	0.413
	A ₀ (in ²)	0.134
	Medium	Air in SCFM
30		81
40		100
50		118
60		137
70		156
80		175
90		193
100		212
120		249
140		287
160		324
180		362
200		399
220		436
240		474
260		511
280		549
300		586
320		623
340		661
363		704

Safety Valves

Type 06416



Cryogenic Safety Valves, angle type, bronze, PN40, type tested TÜV-SV.780. S/G

Standard safety valve (0.2 - 25.0/40.0 bar). **ASME certification only for d₀10.5**

Metal to metal seated, closed bonnet, with lifting device

"cleaned and degreased for oxygen service"

Part No. 06416.X.0000

Inlet: male thread type G (BSPP) acc. to ISO 228/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06416.X.2000

Inlet: male thread type R (BSPT) acc. to ISO 7/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06416.X.5000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06416.X.6000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread NPT acc. to ANSI B 1.20.1

Available options - on request only:

- external parts nickel plated
- with installed elbow at the outlet




Applications:

Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K)

Materials	DIN EN	ASME/ASTM
1 Outlet body	CC491K	B 62 UNS C83600
2 Inlet body	1.4301	A 276 Grade 304
4 Disc	1.4541	A 276 Grade 321
5 Guide plate	CW453K	B 103 UNS C52100
6 Stem	CW453K	B 103 UNS C52100
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4308	A 351 CF 8
9 Spring clamp	CW614N	B 283 UNS C38500
10 Thread ring	CW614N	B 283 UNS C38500
11 Lifting cap	CW614N	B 283 UNS C38500
12 Lifting spring	1.4571	A 276 Grade 316Ti
13 Lifting stem	CW614N	B 283 UNS C38500
14 Lever	1.4408	A 351 CF8M

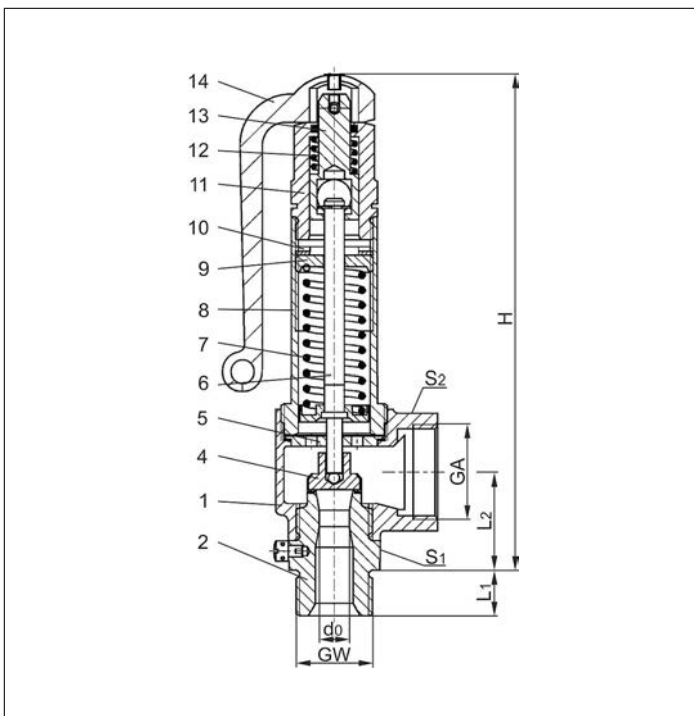

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED) and ASME Code Section VIII.



Type 06416	Technical data			
Nominal size	GW	1/2	3/4	1
Orifice	d ₀	10.5	10.5	14.0
Dimension code	.X.	1004	1006	1410
Set pressure range	bar	0.2-25.0	0.2-25.0	0.2-40.0
Outlet	GA	1	1	1-1/4
Height	H	175	175	194
Length	L ₁	14	16	18
Length	L ₂	36	36	42
Wrench size across flats	S ₁	30	30	41
Wrench size across flats	S ₂	41	41	50
Weight	ca. kg	0.96	1.00	1.50
Coeff. of discharge from 3.0 bar	α _w	0.67	0.67	0.67

Dimensions in mm.

Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/2 & 3/4	1
	d ₀ (mm)	10.5	14
	A ₀ (mm ²)	86.6	153.9
	Medium	Air in m ³ /h	
0.2		25	49
0.5		48	87
1.0		75	135
1.5		100	176
2.0		124	217
3.0		171	304
4.0		214	381
5.0		259	460
6.0		302	537
7.0		346	615
8.0		391	695
9.0		434	772
10.0		479	852
12.0		567	1008
14.0		655	1164
16.0		742	1320
18.0		830	1476
20.0		927	1648
22.0		1015	1805
24.0		1104	1963
25.0		1148	2041
26.0		-	2120
28.0		-	2278
30.0		-	2458
32.0		-	2617
34.0		-	2776
36.0		-	2935
38.0		-	3094
40.0		-	3281

Set pressure in psig	GW	1/2 & 3/4
	d ₀ (inch)	0.413
	A ₀ (in ²)	0.134
	Medium	Air in SCFM
30		81
40		100
50		118
60		137
70		156
80		175
90		193
100		212
120		249
140		287
160		324
180		362
200		399
220		436
240		474
260		511
280		549
300		586
320		623
340		661
363		704

Safety Valves

Type 06387



Cryogenic Safety Valves, angle type, bronze, PN40, type tested TÜV-SV.780. S/G

Standard safety valve (0.2 - 25.0 bar)

Metal to metal seated, closed bonnet

"cleaned and degreased for oxygen service"

Part No. 06387.X.0000

Inlet: female thread type G (BSPP) acc. to ISO 228/1

Outlet: female thread type G (BSPP) acc. to ISO 228/1

Available options - on request only:

- external parts nickel plated · with installed elbow at the outlet



Applications:


Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K)

Materials	DIN EN	ASME/ASTM
1 Outlet body	CC491K	B 62 UNS C83600
2 Inlet body	1.4301	A 276 Grade 304
4 Disc	1.4541	A 276 Grade 321
5 Guide plate	CW453K	B 103 UNS C52100
6 Stem	CW453K	B 103 UNS C52100
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4308	A 351 CF 8
9 Spring clamp	CW614N	B 283 UNS C38500
10 Thread ring	CW614N	B 283 UNS C38500
11 Cap	CW614N	B 283 UNS C38500

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

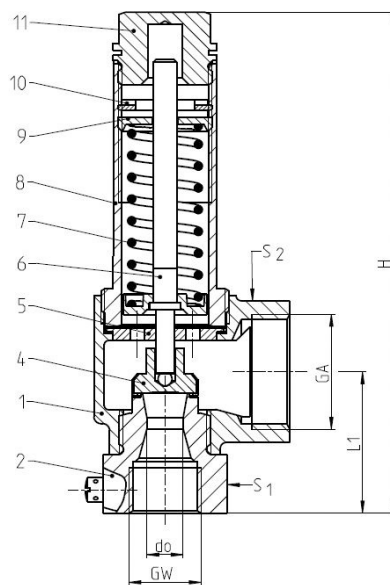

Type 06387	Technical data	
Nominal size	GW	1/2
Orifice	d ₀	10.5
Dimension code	.X.	1004
Set pressure range	bar	0.2-25.0
Outlet	GA	1
Height	H	144
Length	L ₁	41
Wrench size across flats	S ₁	36
Wrench size across flats	S ₂	41
Weight	ca. kg	0.78
Coeff. of discharge from 3.0 bar	α _w	0.67

Dimensions in mm.

Safety Valves

Type 06387



Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

Air in m³/h at 0°C and 1013.25 mbar

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Set pressure in bar (g)	GW	1/2
	d ₀ (mm)	10.5
	A ₀ (mm ²)	86.6
	Medium	Air
0.2		25
0.5		48
1.0		74
1.5		99
2.0		124
3.0		170
4.0		214
5.0		258
6.0		302
7.0		345
8.0		390
9.0		434
10.0		479
12.0		566
14.0		654
16.0		742
18.0		830
20.0		926
22.0		1015
24.0		1103
25.0		1148
26.0		-
28.0		-
30.0		-
32.0		-
34.0		-
36.0		-
38.0		-
40.0		-

Safety Valves

Type 06417



Cryogenic Safety Valves, angle type, bronze, PN40, type tested TÜV-SV.780. S/G

Standard safety valve (0.2 - 25.0 bar)

Metal to metal seated, closed bonnet, with lifting device

"cleaned and degreased for oxygen service"

Part No. 06417.X.0000

Inlet: female thread type G (BSPP) acc. to ISO 228/1

Outlet: female thread type G (BSPP) acc. to ISO 228/1

Available options - on request only:

- external parts nickel plated · with installed elbow at the outlet



Applications:


Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K)

Materials	DIN EN	ASME/ASTM
1 Outlet body	CC491K	B 62 UNS C83600
2 Inlet body	1.4301	A 276 Grade 304
4 Disc	1.4541	A 276 Grade 321
5 Guide plate	CW453K	B 103 UNS C52100
6 Stem	CW453K	B 103 UNS C52100
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4308	A 351 CF 8
9 Spring clamp	CW614N	B 283 UNS C38500
10 Thread ring	CW614N	B 283 UNS C38500
11 Lifting cap	CW614N	B 283 UNS C38500
12 Lifting spring	1.4571	A 276 Grade 316Ti
13 Lifting stem	CW614N	B 283 UNS C38500
14 Lever	1.4408	A 351 CF8M

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

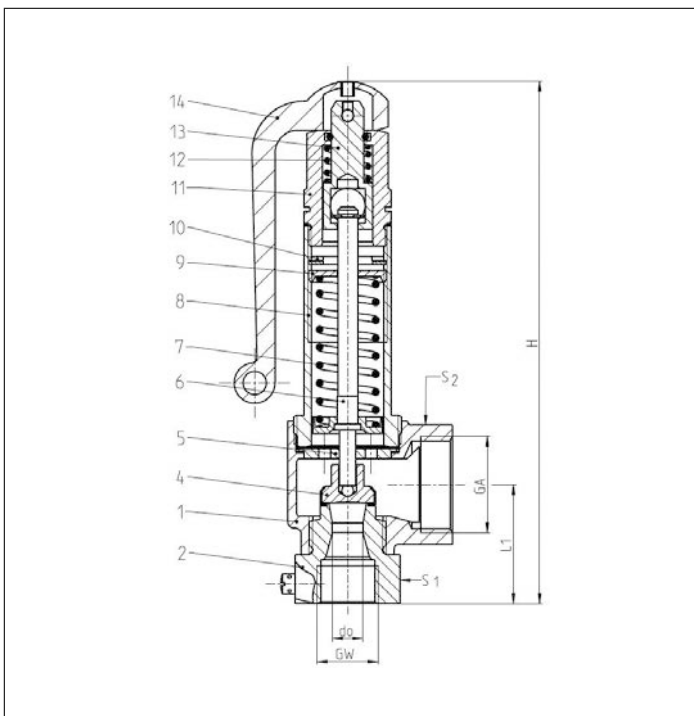

Type 06417	Technical data	
Nominal size	GW	1/2
Orifice	d ₀	10.5
Dimension code	.X.	1004
Set pressure range	bar	0.2-25.0
Outlet	GA	1
Height	H	180
Length	L ₁	41
Wrench size across flats	S ₁	30
Wrench size across flats	S ₂	41
Weight	ca. kg	0.99
Coeff. of discharge from 3.0 bar	α _w	0.67

Dimensions in mm.

Safety Valves

Type 06417



Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

Air in m³/h at 0°C and 1013.25 mbar

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Set pressure in bar (g)	GW	1/2
	d ₀ (mm)	10.5
	A ₀ (mm ²)	86.6
	Medium	Air
0.2		25
0.5		48
1.0		74
1.5		99
2.0		124
3.0		170
4.0		214
5.0		258
6.0		302
7.0		345
8.0		390
9.0		434
10.0		479
12.0		566
14.0		654
16.0		742
18.0		830
20.0		926
22.0		1015
24.0		1103
25.0		1148
26.0		-
28.0		-
30.0		-
32.0		-
34.0		-
36.0		-
38.0		-
40.0		-





Cryogenic Safety Valve, angle type, bronze, PN50, type tested TÜV-SV.780. S/G

Full lift safety valve, orifice $d_0=23\text{mm}$ standard safety valve,
with carbon filled PTFE valve seal, orifice $d_0=23\text{mm}$ with PCTFE seal, closed bonnet
"cleaned and degreased for oxygen service"

Part No. 06388.X.0000

Inlet: male thread type G (BSPP) acc. to ISO 228/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06388.X.2000

Inlet: male thread type R (BSPT) acc. to ISO 7/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06388.X.5000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06388.X.6000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread NPT acc. to ANSI B 1.20.1

Available options - on request only:

- external parts nickel plated · with installed elbow at the outlet
- with additional drain hole at the outlet (1)



Applications:


Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to $+185^{\circ}\text{C}$ / $+365^{\circ}\text{F}$ (458K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Outlet body	CC491K	B 62 UNS C83600
2 Inlet body	1.4301	SA 479 Grade 304
3 Valve seal	PTFE / Carbon filled (25%) PCTFE ($d_0=23$)	
4 Disc	CC493K	SB 505 UNS C93200
5 Guide plate	CC493K	SB 505 UNS C93200
5a Guide plate from GW 1	CC453K	SB 103 UNS C52100
6 Stem	CW453K	SB 103 UNS C52100
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4308	A 351 CF 8
9 Spring clamp	CW614N	B 455 UNS C38500
10 Thread ring	CW614N	B 455 UNS C38500
11 Cap	CW614N	B 455 UNS C38500

Essential: Valves are delivered at a set pressure,
therefore when ordering please confirm set
pressure, medium and temperature.



Standard marking acc. to Pressure Equipment
Directive 2014/68/EU (PED) and ASME Code
Section VIII.

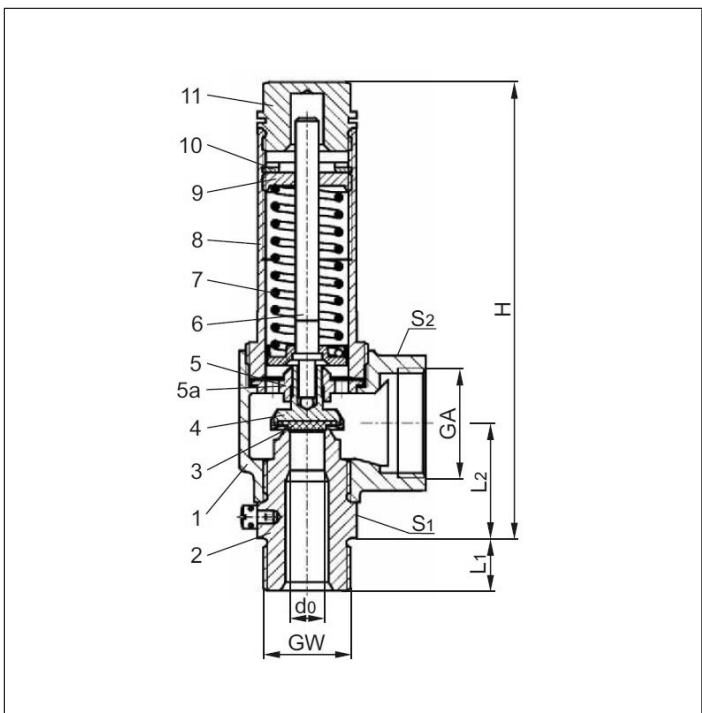

Type 06388	Technical data								
Nominal size	GW	1/2	3/4	1/2	3/4	1	1-1/4	1-1/2	2
Orifice	d_0	7.0	7.0	10.5	10.5	15.0	23.0	23.0	23.0
Dimension code	.X.	0704	0706	1004	1006	1510	2312	2314	2320
Set pressure range	bar	3.3-50.0	3.3-50.0	2.9-50.0	2.9-50.0	2.9-50.0	2.0-50.0	2.0-50.0	2.0-50.0
Outlet	GA	1	1	1	1	1-1/4	2	2	2
Height	H	140	140	140	140	157	218	218	216
Length	L_1	14	16	14	16	18	20	20	25
Length	L_2	36	36	36	36	42	56	56	54
Wrench size across flats	S_1	30	30	30	30	41	55	55	65
Wrench size across flats	S_2	41	41	41	41	50	70	70	70
Weight	ca. kg	0.78	0.80	0.76	0.79	1.27	3.05	3.10	3.30
Coefficient of discharge	α_w	0.82	0.82	0.58	0.58	0.5	0.62	0.62	0.62
Coefficient of discharge	rated slope	0.862	0.862	1.517	1.517	2.769	7.55	7.55	7.55

Dimensions in mm.

Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/2 & 3/4	1/2 & 3/4	1	1-1/4, 1-1/2 & 2
d ₀ (mm)		7.0	10.5	15.0	23.0
A ₀ (mm ²)		38.48	86.59	176.71	415.48
Medium	Air in m ³ /h				
2.0		-	-	-	564
2.9		-	139	244	738
3.0		-	143	251	758
3.3		96	154	270	817
4.0		112	179	314	952
5.0		135	215	379	1148
6.0		158	251	442	1342
7.0		181	287	506	1535
8.0		204	324	571	1735
9.0		227	361	634	1929
10.0		250	398	699	2128
12.0		295	470	827	2517
14.0		341	543	955	2907
16.0		387	615	1082	3297
18.0		432	688	1210	3686
20.0		482	767	1350	4115
22.0		528	841	1479	4508
24.0		574	914	1608	4902
26.0		620	987	1737	5295
28.0		666	1060	1865	5688
30.0		719	1144	2013	6139
32.0		765	1218	2143	6536
34.0		812	1292	2273	6933
36.0		858	1366	2403	7330
38.0		905	1440	2533	7727
40.0		959	1527	2686	8194
42.0		1006	1601	2817	8595
44.0		1053	1676	2948	8995
46.0		1100	1750	3079	9396
48.0		1147	1825	3210	9796
50.0		1204	1915	3370	10283

Set pressure in psig	GW	1/2 & 3/4	1/2 & 3/4	1	1-1/4, 1-1/2 & 2
d ₀ (inch)		0.276	0.413	0.591	0.906
A ₀ (in ²)		0.060	0.134	0.274	0.644
Medium	Air in SCFM				
30		-	-	-	360
40		-	-	-	443
50		60	106	193	526
60		70	122	223	609
70		79	139	254	692
80		89	156	284	775
90		98	172	315	858
100		107	189	345	941
110		117	206	376	1025
120		126	223	406	1108
130		136	239	437	1191
140		145	256	467	1274
150		155	273	498	1357
175		179	314	574	1564
200		202	356	650	1772
225		226	398	726	1980
250		250	439	802	2187
275		273	481	878	2395
300		297	523	954	2602
325		321	565	1031	2810
350		345	606	1107	3018
375		368	648	1183	3225
400		392	690	1259	3433
425		416	731	1335	3641
450		439	773	1411	3848
475		463	815	1488	4056
500		487	857	1564	4263
525		510	898	1640	4471
550		534	940	1716	4679
575		558	982	1792	4886
600		582	1024	1868	5094
625		605	1065	1944	5302
650		629	1107	2021	5509
675		653	1149	2097	5717
700		676	1190	2173	5924
725		700	1232	2249	6132



Cryogenic Safety Valve, angle type, bronze, PN50, type tested TÜV-SV.780. S/G

Full lift safety valve, orifice $d_0=23\text{mm}$ standard safety valve,
with carbon filled PTFE valve seal, orifice $d_0=23\text{mm}$ with PCTFE seal, closed bonnet
"cleaned and degreased for oxygen service"

Part No. 06388.X.0040

Inlet: male thread type G (BSPP) acc. to ISO 228/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06388.X.2040

Inlet: male thread type R (BSPT) acc. to ISO 7/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06388.X.5040

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06388.X.6040

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread NPT acc. to ANSI B 1.20.1

Available options - on request only:

- external parts nickel plated · with installed elbow at the outlet
- with additional drain hole at the outlet (1)



Applications:


Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to $+185^{\circ}\text{C}$ / $+365^{\circ}\text{F}$ (458K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Outlet body	CC491K	B 62 UNS C83600
2 Inlet body	CW614N	B 455 UNS C38500
3 Valve seal	PTFE / Carbon filled (25%) PCTFE ($d_0=23$)	
4 Disc	CC493K	SB 505 UNS C93200
5 Guide plate	CC493K	SB 505 UNS C93200
5a Guide plate from GW 1	CC453K	SB 103 UNS C52100
6 Stem	CW453K	SB 103 UNS C52100
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4308	A 351 CF 8
9 Spring clamp	CW614N	B 455 UNS C38500
10 Thread ring	CW614N	B 455 UNS C38500
11 Cap	CW614N	B 455 UNS C38500

Essential: Valves are delivered at a set pressure,
therefore when ordering please confirm set
pressure, medium and temperature.



Standard marking acc. to Pressure Equipment
Directive 2014/68/EU (PED) and ASME Code
Section VIII.

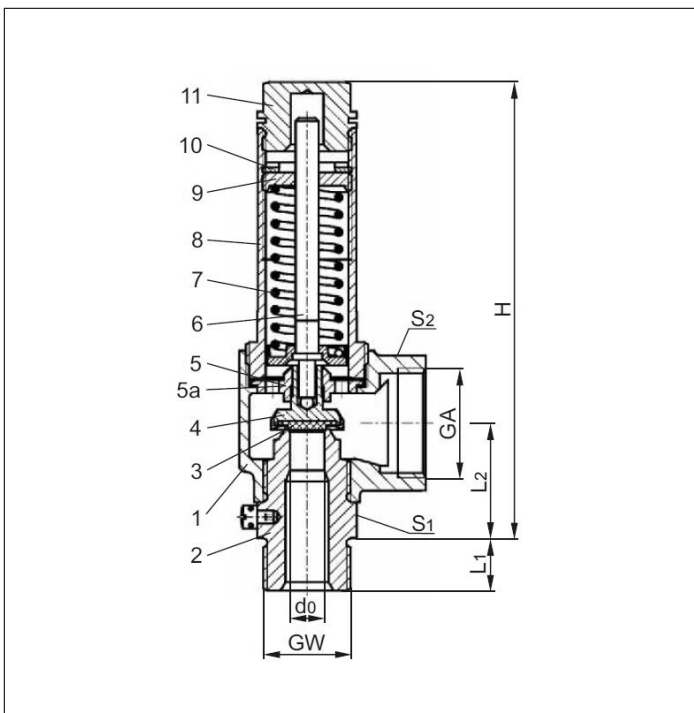

Type 06388	Technical data								
Nominal size	GW	1/2	3/4	1/2	3/4	1	1-1/4	1-1/2	2
Orifice	d_0	7.0	7.0	10.5	10.5	15.0	23.0	23.0	23.0
Dimension code	.X.	0704	0706	1004	1006	1510	2312	2314	2320
Set pressure range	bar	3.3-50.0	3.3-50.0	2.9-50.0	2.9-50.0	2.9-50.0	2.0-50.0	2.0-50.0	2.0-50.0
Outlet	GA	1	1	1	1	1-1/4	2	2	2
Height	H	140	140	140	140	157	218	218	216
Length	L_1	14	16	14	16	18	20	20	25
Length	L_2	36	36	36	36	42	56	56	54
Wrench size across flats	S_1	30	30	30	30	41	55	55	65
Wrench size across flats	S_2	41	41	41	41	50	70	70	70
Weight	ca. kg	0.78	0.80	0.76	0.79	1.27	3.05	3.10	3.30
Coefficient of discharge	α_w	0.82	0.82	0.58	0.58	0.5	0.62	0.62	0.62
Coefficient of discharge	rated slope	0.862	0.862	1.517	1.517	2.769	7.55	7.55	7.55

Dimensions in mm.

Safety Valves

Type 06388



Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/2 & 3/4	1/2 & 3/4	1	1-1/4, 1-1/2 & 2
d ₀ (mm)		7.0	10.5	15.0	23.0
A ₀ (mm ²)		38.48	86.59	176.71	415.48
Medium	Air in m ³ /h				
2.0		-	-	-	564
2.9		-	139	244	738
3.0		-	143	251	758
3.3		96	154	270	817
4.0		112	179	314	952
5.0		135	215	379	1148
6.0		158	251	442	1342
7.0		181	287	506	1535
8.0		204	324	571	1735
9.0		227	361	634	1929
10.0		250	398	699	2128
12.0		295	470	827	2517
14.0		341	543	955	2907
16.0		387	615	1082	3297
18.0		432	688	1210	3686
20.0		482	767	1350	4115
22.0		528	841	1479	4508
24.0		574	914	1608	4902
26.0		620	987	1737	5295
28.0		666	1060	1865	5688
30.0		719	1144	2013	6139
32.0		765	1218	2143	6536
34.0		812	1292	2273	6933
36.0		858	1366	2403	7330
38.0		905	1440	2533	7727
40.0		959	1527	2686	8194
42.0		1006	1601	2817	8595
44.0		1053	1676	2948	8995
46.0		1100	1750	3079	9396
48.0		1147	1825	3210	9796
50.0		1204	1915	3370	10283

Set pressure in psig	GW	1/2 & 3/4	1/2 & 3/4	1	1-1/4, 1-1/2 & 2
d ₀ (inch)		0.276	0.413	0.591	0.906
A ₀ (in ²)		0.060	0.134	0.274	0.644
Medium	Air in SCFM				
30		-	-	-	360
40		-	-	-	443
50		60	106	193	526
60		70	122	223	609
70		79	139	254	692
80		89	156	284	775
90		98	172	315	858
100		107	189	345	941
110		117	206	376	1025
120		126	223	406	1108
130		136	239	437	1191
140		145	256	467	1274
150		155	273	498	1357
175		179	314	574	1564
200		202	356	650	1772
225		226	398	726	1980
250		250	439	802	2187
275		273	481	878	2395
300		297	523	954	2602
325		321	565	1031	2810
350		345	606	1107	3018
375		368	648	1183	3225
400		392	690	1259	3433
425		416	731	1335	3641
450		439	773	1411	3848
475		463	815	1488	4056
500		487	857	1564	4263
525		510	898	1640	4471
550		534	940	1716	4679
575		558	982	1792	4886
600		582	1024	1868	5094
625		605	1065	1944	5302
650		629	1107	2021	5509
675		653	1149	2097	5717
700		676	1190	2173	5924
725		700	1232	2249	6132



Cryogenic Safety Valve, angle type, bronze, PN50, type tested TÜV-SV.780. S/G

Full lift safety valve, orifice $d_0=23\text{mm}$ standard safety valve,
with carbon filled PTFE valve seal, orifice $d_0=23\text{mm}$ with PCTFE seal, closed bonnet, with lifting device
"cleaned and degreased for oxygen service"

Part No. 06418.X.0000

Inlet: male thread type G (BSPP) acc. to ISO 228/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06418.X.2000

Inlet: male thread type R (BSPT) acc. to ISO 7/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06418.X.5000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06418.X.6000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread NPT acc. to ANSI B 1.20.1

Available options - on request only:


- external parts nickel plated · with installed elbow at the outlet



Applications:

Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to $+185^\circ\text{C}$ / $+365^\circ\text{F}$ (458K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Outlet body	CC491K	B 62 UNS C83600
2 Inlet body	1.4301	SA 479 Grade 304
3 Valve seal	PTFE / Carbon filled (25%) PCTFE ($d_0=23$)	
4 Disc	CC493K	SB 505 UNS C93200
5 Guide plate	CC493K	SB 505 UNS C93200
5a Guide plate from GW 1	CW453K	SB 103 UNS C52100
6 Stem	CW453K	SB 103 UNS C52100
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4308	A 351 CF 8
9 Spring clamp	CW614N	B 455 UNS C38500
10 Thread ring	CW614N	B 455 UNS C38500
11 Lifting cap	CW614N	B 455 UNS C38500
12 Lifting spring	1.4571	A 313 Grade 316Ti
13 Lifting stem	CW614N	B 455 UNS C38500
14 Lever	1.4408	A 351 CF8M

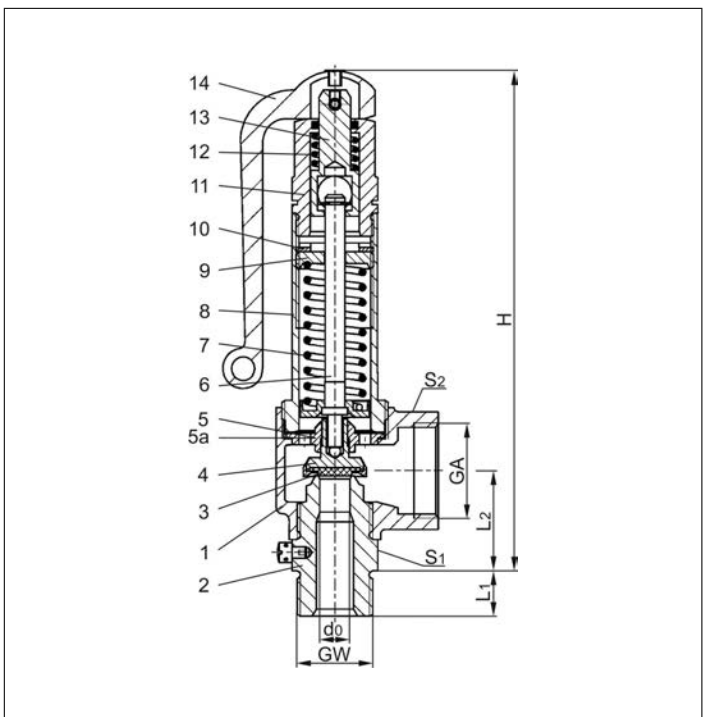

Essential: Valves are delivered at a set pressure,
therefore when ordering please confirm set
pressure, medium and temperature.



Standard marking acc. to Pressure Equipment
Directive 2014/68/EU (PED) and ASME Code
Section VIII.



Type 06418	Technical data								
Nominal size	GW	1/2	3/4	1/2	3/4	1	1-1/4	1-1/2	2
Orifice	d_0	7.0	7.0	10.5	10.5	15.0	23.0	23.0	23.0
Dimension code	.X.	0704	0706	1004	1006	1510	2312	2314	2320
Set pressure range	bar	3.3-50.0	3.3-50.0	2.9-50.0	2.9-50.0	2.9-50.0	2.0-50.0	2.0-50.0	2.0-50.0
Outlet	GA	1	1	1	1	1-1/4	2	2	2
Height	H	175	175	175	175	194	270	270	268
Length	L_1	14	16	14	16	18	20	20	25
Length	L_2	36	36	36	36	42	56	56	54
Wrench size across flats	S_1	30	30	30	30	41	55	55	65
Wrench size across flats	S_2	41	41	41	41	50	70	70	70
Weight	ca. kg	1.00	1.02	0.98	1.01	1.52	3.80	3.85	4.28
Coefficient of discharge	α_w	0.82	0.82	0.58	0.58	0.5	0.62	0.62	0.62
Coefficient of discharge	rated slope	0.862	0.862	1.517	1.517	2.769	7.55	7.55	7.55

Dimensions in mm.

Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/2 & 3/4	1/2 & 3/4	1	1-1/4, 1-1/2 & 2
d ₀ (mm)	7.0	10.5	15.0	23.0	
A ₀ (mm ²)	38.48	86.59	176.71	415.48	
Medium	Air in m ³ /h				
2.0	-	-	-	564	
2.9	-	139	244	738	
3.0	-	143	251	758	
3.3	96	154	270	817	
4.0	112	179	314	952	
5.0	135	215	379	1148	
6.0	158	251	442	1342	
7.0	181	287	506	1535	
8.0	204	324	571	1735	
9.0	227	361	634	1929	
10.0	250	398	699	2128	
12.0	295	470	827	2517	
14.0	341	543	955	2907	
16.0	387	615	1082	3297	
18.0	432	688	1210	3686	
20.0	482	767	1350	4115	
22.0	528	841	1479	4508	
24.0	574	914	1608	4902	
26.0	620	987	1737	5295	
28.0	666	1060	1865	5688	
30.0	719	1144	2013	6139	
32.0	765	1218	2143	6536	
34.0	812	1292	2273	6933	
36.0	858	1366	2403	7330	
38.0	905	1440	2533	7727	
40.0	959	1527	2686	8194	
42.0	1006	1601	2817	8595	
44.0	1053	1676	2948	8995	
46.0	1100	1750	3079	9396	
48.0	1147	1825	3210	9796	
50.0	1204	1915	3370	10283	

Set pressure in psig	GW	1/2 & 3/4	1/2 & 3/4	1	1-1/4, 1-1/2 & 2
d ₀ (inch)	0.276	0.413	0.591	0.906	
A ₀ (in ²)	0.060	0.134	0.274	0.644	
Medium	Air in SCFM				
30	-	-	-	360	
40	-	-	-	443	
50	60	106	193	526	
60	70	122	223	609	
70	79	139	254	692	
80	89	156	284	775	
90	98	172	315	858	
100	107	189	345	941	
110	117	206	376	1025	
120	126	223	406	1108	
130	136	239	437	1191	
140	145	256	467	1274	
150	155	273	498	1357	
175	179	314	574	1564	
200	202	356	650	1772	
225	226	398	726	1980	
250	250	439	802	2187	
275	273	481	878	2395	
300	297	523	954	2602	
325	321	565	1031	2810	
350	345	606	1107	3018	
375	368	648	1183	3225	
400	392	690	1259	3433	
425	416	731	1335	3641	
450	439	773	1411	3848	
475	463	815	1488	4056	
500	487	857	1564	4263	
525	510	898	1640	4471	
550	534	940	1716	4679	
575	558	982	1792	4886	
600	582	1024	1868	5094	
625	605	1065	1944	5302	
650	629	1107	2021	5509	
675	653	1149	2097	5717	
700	676	1190	2173	5924	
725	700	1232	2249	6132	



Cryogenic Safety Valve, angle type, bronze, PN50, type tested TÜV-SV.780. S/G

Full lift safety valve, orifice $d_0=23\text{mm}$ standard safety valve, with carbon filled PTFE valve seal, orifice $d_0=23\text{mm}$ with PCTFE seal, closed bonnet, with lifting device "cleaned and degreased for oxygen service"

Part No. 06418.X.0040

Inlet: male thread type G (BSPP) acc. to ISO 228/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06418.X.2040

Inlet: male thread type R (BSPT) acc. to ISO 7/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06418.X.5040

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06418.X.6040

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread NPT acc. to ANSI B 1.20.1

Available options - on request only:


- external parts nickel plated
- with installed elbow at the outlet



Applications:

Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG. Working temperature: -196°C / -321°F (77K) up to $+185^\circ\text{C}$ / $+365^\circ\text{F}$ (458K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Outlet body	CC491K	B 62 UNS C83600
2 Inlet body	CW614N	B 455 UNS C38500
3 Valve seal	PTFE / Carbon filled (25%) PCTFE ($d_0 23$)	
4 Disc	CC493K	SB 505 UNS C93200
5 Guide plate	CC493K	SB 505 UNS C93200
5a Guide plate from GW 1	CW453K	SB 103 UNS C52100
6 Stem	CW453K	SB 103 UNS C52100
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4308	A 351 CF 8
9 Spring clamp	CW614N	B 455 UNS C38500
10 Thread ring	CW614N	B 455 UNS C38500
11 Lifting cap	CW614N	B 455 UNS C38500
12 Lifting spring	1.4571	A 313 Grade 316Ti
13 Lifting stem	CW614N	B 455 UNS C38500
14 Lever	1.4408	A 351 CF8M

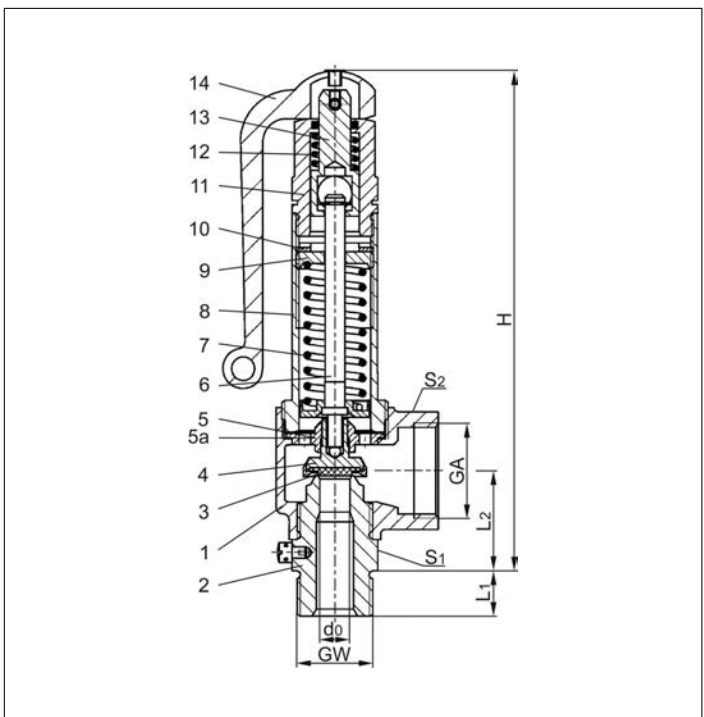

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.



Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED) and ASME Code Section VIII.



Type 06418	Technical data								
Nominal size	GW	1/2	3/4	1/2	3/4	1	1-1/4	1-1/2	2
Orifice	d_0	7.0	7.0	10.5	10.5	15.0	23.0	23.0	23.0
Dimension code	.X.	0704	0706	1004	1006	1510	2312	2314	2320
Set pressure range	bar	3.3-50.0	3.3-50.0	2.9-50.0	2.9-50.0	2.9-50.0	2.0-50.0	2.0-50.0	2.0-50.0
Outlet	GA	1	1	1	1	1-1/4	2	2	2
Height	H	175	175	175	175	194	270	270	268
Length	L_1	14	16	14	16	18	20	20	25
Length	L_2	36	36	36	36	42	56	56	54
Wrench size across flats	S_1	30	30	30	30	41	55	55	65
Wrench size across flats	S_2	41	41	41	41	50	70	70	70
Weight	ca. kg	1.00	1.02	0.98	1.01	1.52	3.80	3.85	4.28
Coefficient of discharge	α_w	0.82	0.82	0.58	0.58	0.5	0.62	0.62	0.62
Coefficient of discharge	rated slope	0.862	0.862	1.517	1.517	2.769	7.55	7.55	7.55

Dimensions in mm.

Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/2 & 3/4	1/2 & 3/4	1	1-1/4, 1-1/2 & 2
d ₀ (mm)	7.0	10.5	15.0	23.0	
A ₀ (mm ²)	38.48	86.59	176.71	415.48	
Medium	Air in m ³ /h				
2.0	-	-	-	564	
2.9	-	139	244	738	
3.0	-	143	251	758	
3.3	96	154	270	817	
4.0	112	179	314	952	
5.0	135	215	379	1148	
6.0	158	251	442	1342	
7.0	181	287	506	1535	
8.0	204	324	571	1735	
9.0	227	361	634	1929	
10.0	250	398	699	2128	
12.0	295	470	827	2517	
14.0	341	543	955	2907	
16.0	387	615	1082	3297	
18.0	432	688	1210	3686	
20.0	482	767	1350	4115	
22.0	528	841	1479	4508	
24.0	574	914	1608	4902	
26.0	620	987	1737	5295	
28.0	666	1060	1865	5688	
30.0	719	1144	2013	6139	
32.0	765	1218	2143	6536	
34.0	812	1292	2273	6933	
36.0	858	1366	2403	7330	
38.0	905	1440	2533	7727	
40.0	959	1527	2686	8194	
42.0	1006	1601	2817	8595	
44.0	1053	1676	2948	8995	
46.0	1100	1750	3079	9396	
48.0	1147	1825	3210	9796	
50.0	1204	1915	3370	10283	

Set pressure in psig	GW	1/2 & 3/4	1/2 & 3/4	1	1-1/4, 1-1/2 & 2
d ₀ (inch)	0.276	0.413	0.591	0.906	
A ₀ (in ²)	0.060	0.134	0.274	0.644	
Medium	Air in SCFM				
30	-	-	-	360	
40	-	-	-	443	
50	60	106	193	526	
60	70	122	223	609	
70	79	139	254	692	
80	89	156	284	775	
90	98	172	315	858	
100	107	189	345	941	
110	117	206	376	1025	
120	126	223	406	1108	
130	136	239	437	1191	
140	145	256	467	1274	
150	155	273	498	1357	
175	179	314	574	1564	
200	202	356	650	1772	
225	226	398	726	1980	
250	250	439	802	2187	
275	273	481	878	2395	
300	297	523	954	2602	
325	321	565	1031	2810	
350	345	606	1107	3018	
375	368	648	1183	3225	
400	392	690	1259	3433	
425	416	731	1335	3641	
450	439	773	1411	3848	
475	463	815	1488	4056	
500	487	857	1564	4263	
525	510	898	1640	4471	
550	534	940	1716	4679	
575	558	982	1792	4886	
600	582	1024	1868	5094	
625	605	1065	1944	5302	
650	629	1107	2021	5509	
675	653	1149	2097	5717	
700	676	1190	2173	5924	
725	700	1232	2249	6132	

Cryogenic Safety Valves, angle type, stainless steel, PN40, type tested TÜV-SV.780. S/G

Standard safety valve

Metal to metal seated, closed bonnet

"cleaned and degreased for oxygen service"

Part No. 06381.X.0000

Inlet: male thread type G (BSPP) acc. to ISO 228/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06381.X.2000

Inlet: male thread type R (BSPT) acc. to ISO 7/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06381.X.5000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06381.X.6000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread NPT acc. to ANSI B 1.20.1




Applications:

Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K)

Materials	DIN EN	ASME/ASTM
1 Outlet body	1.4308	A 351 CF8
2 Inlet body	1.4301	A 276 Grade 304
4 Disc	1.4541	A 276 Grade 321
5 Guide plate	1.4301	A 276 Grade 304
6 Stem	1.4301	A 276 Grade 304
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4308	A 351 CF8
9 Spring clamp	1.4301	A 276 Grade 304
10 Thread ring	1.4301	A 276 Grade 304
11 Cap	1.4301	A 276 Grade 304

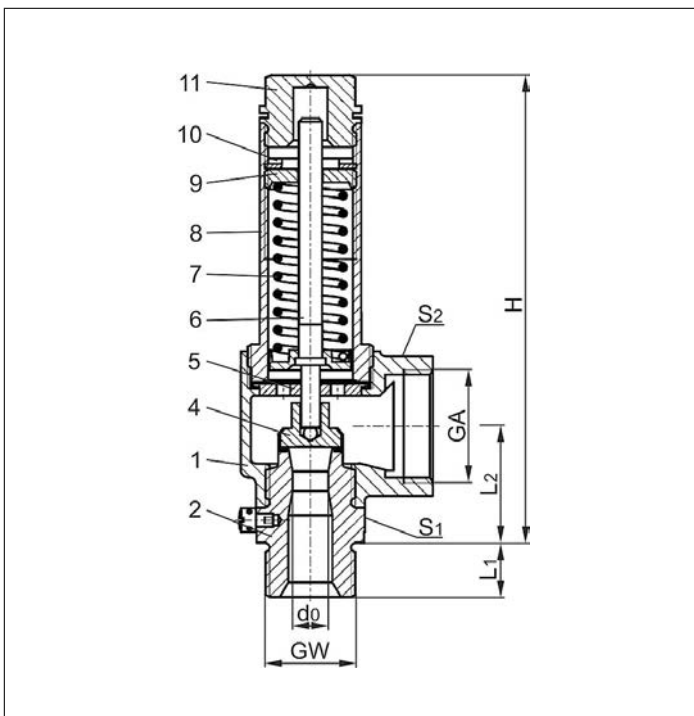

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED) and ASME Code Section VIII.



Type 06381	Technical data		
Nominal size	GW	1/2	3/4
Orifice	d ₀	10.5	10.5
Dimension code	.X.	1004	1006
Set pressure range	bar	0.2-25.0	0.2-25.0
Outlet	GA	1	1
Height	H	140	140
Length	L ₁	14	16
Length	L ₂	36	36
Wrench size across flats	S ₁	30	30
Wrench size across flats	S ₂	41	41
Weight	ca. kg	0.75	0.78
Coeff. of discharge from 3.0 bar	α _w	0.67	0.67

Dimensions in mm.

Safety Valves

Type 06381



Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/2 & 3/4
	d ₀ (mm)	10.5
	A ₀ (mm ²)	86.6
	Medium	Air in m³/h
0.2		25
0.5		48
1.0		75
1.5		100
2.0		124
3.0		171
4.0		214
5.0		259
6.0		302
7.0		346
8.0		391
9.0		434
10.0		479
12.0		567
14.0		655
16.0		742
18.0		830
20.0		927
22.0		1015
24.0		1104
25.0		1148

Set pressure in psig	GW	1/2 & 3/4
	d ₀ (inch)	0.413
	A ₀ (in ²)	0.134
	Medium	Air in SCFM
30		81
40		100
50		118
60		137
70		156
80		175
90		193
100		212
120		249
140		287
160		324
180		362
200		399
220		436
240		474
260		511
280		549
300		586
320		623
340		661
363		704



Cryogenic Safety Valves, angle type, stainless steel, PN50, type tested TÜV-SV.780. S/G

Full lift safety valve, orifice $d_0=23\text{mm}$ standard safety valve,
with carbon filled PTFE valve seal, orifice $d_0=23\text{mm}$ with PCTFE seal, closed bonnet
"cleaned and degreased for oxygen service"

Part No. 06383.X.0000

Inlet: male thread type G (BSPP) acc. to ISO 228/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06383.X.2000

Inlet: male thread type R (BSPT) acc. to ISO 7/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06383.X.5000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06383.X.6000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread NPT acc. to ANSI B 1.20.1




Applications:

Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to $+185^\circ\text{C}$ / $+365^\circ\text{F}$ (458K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Outlet body	1.4308	A 351 CF8
2 Inlet body	1.4301	A 479 Grade 304
3 Valve seal	PTFE / Carbon filled (25%) PCTFE ($d_0 23$)	
4 Disc	1.4301	A 479 Grade 304
5 Guide plate	1.4301	A 479 Grade 304
6 Stem	1.4301	A 479 Grade 304
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4308	A 351 CF8
9 Spring clamp	1.4301	A 479 Grade 304
10 Thread ring	1.4301	A 479 Grade 304
11 Cap	1.4301	A 479 Grade 304

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED) and ASME Code Section VIII.

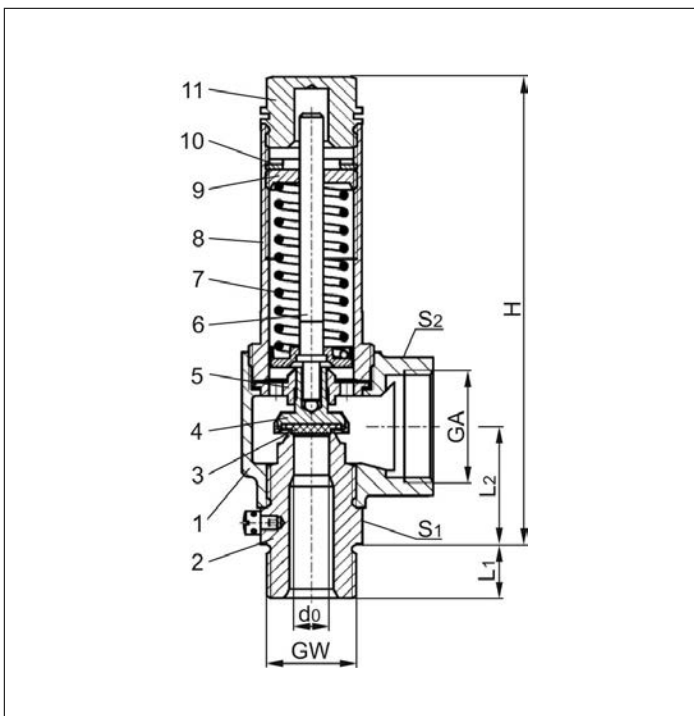

Type 06383	Technical data								
Nominal size	GW	1/2	3/4	1/2	3/4	1	1-1/4	1-1/2	2
Orifice	d_0	7.0	7.0	10.5	10.5	15.0	23.0	23.0	23.0
Dimension code	.X.	0704	0706	1004	1006	1510	2312	2314	2320
Set pressure range	bar	3.3-50.0	3.3-50.0	2.9-50.0	2.9-50.0	2.9-50.0	2.0-50.0	2.0-50.0	2.0-50.0
Outlet	GA	1	1	1	1	1-1/4	2	2	2
Height	H	140	140	140	140	157	218	218	216
Length	L_1	14	16	14	16	18	20	20	25
Length	L_2	36	36	36	36	42	56	56	54
Wrench size across flats	S_1	30	30	30	30	41	55	55	65
Wrench size across flats	S_2	41	41	41	41	50	70	70	70
Weight	ca. kg	0.78	0.80	0.76	0.79	1.27	3.05	3.10	3.30
Coefficient of discharge	α_w	0.82	0.82	0.58	0.58	0.5	0.62	0.62	0.62
Coefficient of discharge	rated slope	0.862	0.862	1.517	1.517	2.769	7.55	7.55	7.55

Dimensions in mm.

Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/2 & 3/4	1/2 & 3/4	1	1-1/4, 1-1/2 & 2
d ₀ (mm)		7.0	10.5	15.0	23.0
A ₀ (mm ²)		38.48	86.59	176.71	415.48
Medium	Air in m ³ /h				
2.0		-	-	-	564
2.9		-	139	244	738
3.0		-	143	251	758
3.3		96	154	270	817
4.0		112	179	314	952
5.0		135	215	379	1148
6.0		158	251	442	1342
7.0		181	287	506	1535
8.0		204	324	571	1735
9.0		227	361	634	1929
10.0		250	398	699	2128
12.0		295	470	827	2517
14.0		341	543	955	2907
16.0		387	615	1082	3297
18.0		432	688	1210	3686
20.0		482	767	1350	4115
22.0		528	841	1479	4508
24.0		574	914	1608	4902
26.0		620	987	1737	5295
28.0		666	1060	1865	5688
30.0		719	1144	2013	6139
32.0		765	1218	2143	6536
34.0		812	1292	2273	6933
36.0		858	1366	2403	7330
38.0		905	1440	2533	7727
40.0		959	1527	2686	8194
42.0		1006	1601	2817	8595
44.0		1053	1676	2948	8995
46.0		1100	1750	3079	9396
48.0		1147	1825	3210	9796
50.0		1204	1915	3370	10283

Set pressure in psig	GW	1/2 & 3/4	1/2 & 3/4	1	1-1/4, 1-1/2 & 2
d ₀ (inch)		0.276	0.413	0.591	0.906
A ₀ (in ²)		0.060	0.134	0.274	0.644
Medium	Air in SCFM				
30		-	-	-	360
40		-	-	-	443
50		60	106	193	526
60		70	122	223	609
70		79	139	254	692
80		89	156	284	775
90		98	172	315	858
100		107	189	345	941
110		117	206	376	1025
120		126	223	406	1108
130		136	239	437	1191
140		145	256	467	1274
150		155	273	498	1357
175		179	314	574	1564
200		202	356	650	1772
225		226	398	726	1980
250		250	439	802	2187
275		273	481	878	2395
300		297	523	954	2602
325		321	565	1031	2810
350		345	606	1107	3018
375		368	648	1183	3225
400		392	690	1259	3433
425		416	731	1335	3641
450		439	773	1411	3848
475		463	815	1488	4056
500		487	857	1564	4263
525		510	898	1640	4471
550		534	940	1716	4679
575		558	982	1792	4886
600		582	1024	1868	5094
625		605	1065	1944	5302
650		629	1107	2021	5509
675		653	1149	2097	5717
700		676	1190	2173	5924
725		700	1232	2249	6132



Cryogenic Safety Valves, angle type, stainless steel, PN50, type tested TÜV-SV.780. S/G

Full lift safety valve, orifice $d_0=23\text{mm}$ standard safety valve, with carbon filled PTFE valve seal, orifice $d_0=23\text{mm}$ with PCTFE seal, closed bonnet, with lifting device "cleaned and degreased for oxygen service"

Part No. 06413.X.0000

Inlet: male thread type G (BSPP) acc. to ISO 228/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06413.X.2000

Inlet: male thread type R (BSPT) acc. to ISO 7/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06413.X.5000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06413.X.6000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread NPT acc. to ANSI B 1.20.1




Applications:

Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG. Working temperature: -196°C / -321°F (77K) up to $+185^\circ\text{C}$ / $+365^\circ\text{F}$ (458K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Outlet body	1.4308	A 351 CF8
2 Inlet body	1.4301	A 479 Grade 304
3 Valve seal	PTFE / Carbon filled (25%) PCTFE ($d_0=23$)	
4 Disc	1.4301	A 479 Grade 304
5 Guide plate	1.4301	A 479 Grade 304
5a Guide plate from GW 1	1.4301	A 479 Grade 304
6 Stem	1.4571	A 479 Grade 316Ti
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4308	A 351 CF8
9 Spring clamp	1.4301	A 479 Grade 304
10 Thread ring	1.4301	A 479 Grade 304
11 Lifting cap	1.4301	A 479 Grade 304
12 Lifting spring	1.4571	A 313 Grade 316Ti
13 Lifting stem	1.4301	A 479 Grade 304
14 Lever	1.4408	A 351 CF8M

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

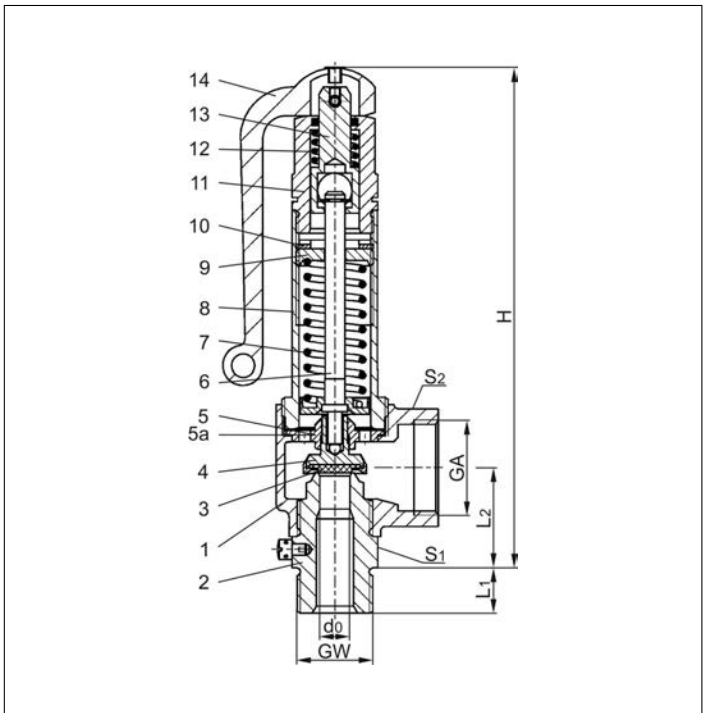

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED) and ASME Code Section VIII.



Type 06413	Technical data								
Nominal size	GW	1/2	3/4	1/2	3/4	1	1-1/4	1-1/2	2
Orifice	d_0	7.0	7.0	10.5	10.5	15.0	23.0	23.0	23.0
Dimension code	.X.	0704	0706	1004	1006	1510	2312	2314	2320
Set pressure range	bar	3.3-50.0	3.3-50.0	2.9-50.0	2.9-50.0	2.9-50.0	2.0-50.0	2.0-50.0	2.0-50.0
Outlet	GA	1	1	1	1	1-1/4	2	2	2
Height	H	175	175	175	175	194	270	270	268
Length	L_1	14	16	14	16	18	20	20	25
Length	L_2	36	36	36	36	42	56	56	54
Wrench size across flats	S_1	30	30	30	30	41	55	55	65
Wrench size across flats	S_2	41	41	41	41	50	70	70	70
Weight	ca. kg	1.00	1.02	0.98	1.01	1.52	3.80	3.85	4.28
Coefficient of discharge	α_w	0.82	0.82	0.58	0.58	0.5	0.62	0.62	0.62
Coefficient of discharge	rated slope	0.862	0.862	1.517	1.517	2.769	7.55	7.55	7.55

Dimensions in mm.

Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/2 & 3/4	1/2 & 3/4	1	1-1/4, 1-1/2 & 2
d ₀ (mm)	7.0	10.5	15.0	23.0	
A ₀ (mm ²)	38.48	86.59	176.71	415.48	
Medium	Air in m ³ /h				
2.0	-	-	-	564	
2.9	-	139	244	738	
3.0	-	143	251	758	
3.3	96	154	270	817	
4.0	112	179	314	952	
5.0	135	215	379	1148	
6.0	158	251	442	1342	
7.0	181	287	506	1535	
8.0	204	324	571	1735	
9.0	227	361	634	1929	
10.0	250	398	699	2128	
12.0	295	470	827	2517	
14.0	341	543	955	2907	
16.0	387	615	1082	3297	
18.0	432	688	1210	3686	
20.0	482	767	1350	4115	
22.0	528	841	1479	4508	
24.0	574	914	1608	4902	
26.0	620	987	1737	5295	
28.0	666	1060	1865	5688	
30.0	719	1144	2013	6139	
32.0	765	1218	2143	6536	
34.0	812	1292	2273	6933	
36.0	858	1366	2403	7330	
38.0	905	1440	2533	7727	
40.0	959	1527	2686	8194	
42.0	1006	1601	2817	8595	
44.0	1053	1676	2948	8995	
46.0	1100	1750	3079	9396	
48.0	1147	1825	3210	9796	
50.0	1204	1915	3370	10283	

Set pressure in psig	GW	1/2 & 3/4	1/2 & 3/4	1	1-1/4, 1-1/2 & 2
d ₀ (inch)	0.276	0.413	0.591	0.906	
A ₀ (in ²)	0.060	0.134	0.274	0.644	
Medium	Air in SCFM				
30	-	-	-	360	
40	-	-	-	443	
50	60	106	193	526	
60	70	122	223	609	
70	79	139	254	692	
80	89	156	284	775	
90	98	172	315	858	
100	107	189	345	941	
110	117	206	376	1025	
120	126	223	406	1108	
130	136	239	437	1191	
140	145	256	467	1274	
150	155	273	498	1357	
175	179	314	574	1564	
200	202	356	650	1772	
225	226	398	726	1980	
250	250	439	802	2187	
275	273	481	878	2395	
300	297	523	954	2602	
325	321	565	1031	2810	
350	345	606	1107	3018	
375	368	648	1183	3225	
400	392	690	1259	3433	
425	416	731	1335	3641	
450	439	773	1411	3848	
475	463	815	1488	4056	
500	487	857	1564	4263	
525	510	898	1640	4471	
550	534	940	1716	4679	
575	558	982	1792	4886	
600	582	1024	1868	5094	
625	605	1065	1944	5302	
650	629	1107	2021	5509	
675	653	1149	2097	5717	
700	676	1190	2173	5924	
725	700	1232	2249	6132	

Safety Valves

Type 06420



Cryogenic Safety Valves, angle type, bronze, PN40

d₀=7.0 & 10.5mm up to PN50

type tested TÜV-SV.1111. S/G

Standard safety valve,

with PCTFE valve seal, (except d₀7, which is metal to metal seated only

and d₀10.5, which is metal to metal seated below 3.0 bar only), closed bonnet

"cleaned and degreased for oxygen service"

Part No. 06420.X.0000

Inlet: male thread type G (BSPP) acc. to ISO 228/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06420.X.2000

Inlet: male thread type R (BSPT) acc. to ISO 7/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06420.X.5000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06420.X.6000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread NPT acc. to ANSI B 1.20.1



Applications:

Provided as safety device for protection against excessive pressure in stationary and moveable gas

cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.


Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K), with PCTFE-seal

up to +150°C / 302°F (423K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Outlet body	CC491K	SB62 UNS C83600
2 Inlet body	1.4301	SA 479 Grade 304
3 Valve seal	PCTFE	
	1.4571	A 313 Grade 316Ti (d ₀ 7)
	1.4541	A 276 Grade 321 (d ₀ 10.5)
4 Disc	CC493K	B 505 UNS C93200
5 Guide plate	CC493K	B 505 UNS C93200
6 Stem	CW453K	B 103 UNS C52100
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4301	A 276 Grade 304
9 Spring clamp	CW614N	B 455 UNS C38500
10 Thread ring	CW614N	B 455 UNS C38500
11 Cap	CW614N	B 455 UNS C38500

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED) and ASME Code Section VIII.

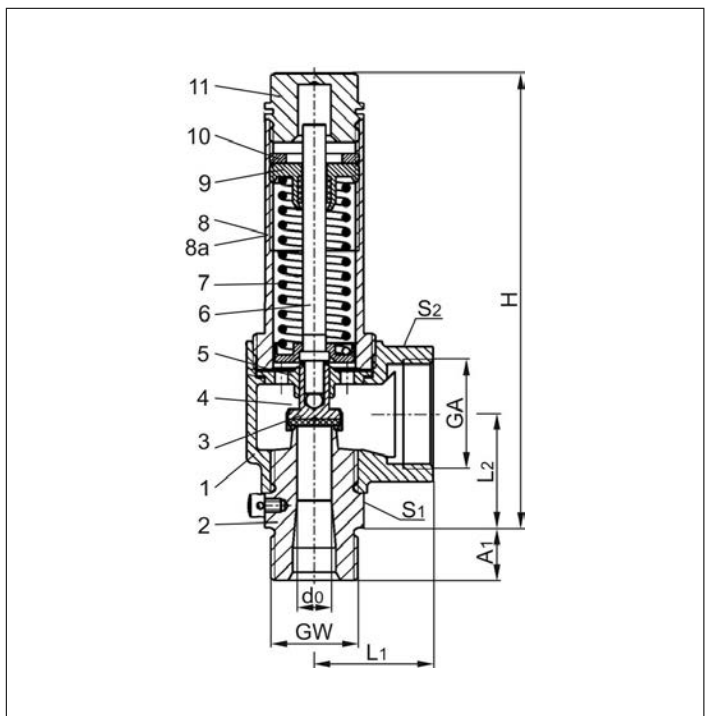

Type 06420	Technical data									
Nominal size	GW	1/2	3/4	1/2	3/4	3/4	1	1	1-1/4	1-1/4
Orifice	d ₀	7.0	7.0	10.5	10.5	14.0	14.0	18.0	18.0	23.0
Dimension code	.X.	0704	0706	1004	1006	1406	1410	1810	1812	2312
Set pressure range	bar	0.4-50.0	0.4-50.0	0.4-50.0	0.4-50.0	0.4-40.0	0.4-40.0	0.4-40.0	0.4-40.0	0.4-10.0
Outlet	GA	1	1	1	1	1-1/4	1-1/4	1-1/2	1-1/2	1-1/2
Height	H	140	140	140	140	159	159	186	187	187
Length	A ₁	14	16	14	16	16	18	18	20	20
Length	L ₁	36	36	36	36	50	50	48	48	48
Length	L ₂	36.5	36.5	36.5	34.5	44	44	50.5	51.5	52
Wrench size across flats	S ₁	30	30	30	30	41	41	50	50	50
Wrench size across flats	S ₂	41	41	41	41	50	50	58	58	58
Weight	ca. kg	0.78	0.80	0.76	0.79	1.25	1.31	1.87	1.99	1.90
Coeff. of disch. from 3.0 bar	α _w	0.78	0.78	0.69	0.69	0.66	0.66	0.66	0.66	0.54

Dimensions in mm.

Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/2 & 3/4	1/2 & 3/4	3/4 & 1	1 & 1-1/4	1-1/4	Set pressure in psig	GW	1/2 & 3/4	1/2 & 3/4	3/4 & 1	1 & 1-1/4	1-1/4
	d ₀ (mm)	7.0	10.5	14.0	18.0	23.0		d ₀ (inch)	0.276	0.413	0.551	0.709	0.906
	A ₀ (mm ²)	38.48	86.59	153.94	254.47	415.48		A ₀ (in ²)	0.060	0.134	0.239	0.394	0.644
Air in m ³ /h							Air in SCFM						
0.4	Medium	24	43	77	123	157	28	Medium	-	-	-	-	298
0.5		27	49	87	141	179	29		42	-	-	-	304
1.0		41	77	131	216	287	35		47	90	154	-	346
1.5		54	101	179	291	376	40		52	100	169	280	382
2.0		66	126	219	362	473	50		62	118	201	333	454
3.0		88	176	299	495	661	60		72	137	233	385	525
4.0		111	221	375	621	829	70		82	156	265	438	597
5.0		134	266	453	748	1000	80		92	174	296	490	669
6.0		156	311	529	875	1169	90		101	193	328	543	740
7.0		179	356	606	1001	1337	100		111	212	360	595	812
8.0		202	402	684	1131	1511	120		131	249	424	700	955
9.0		225	447	761	1258	1680	145		155	296	503	831	1134
10.0		248	494	839	1387	1853	160		170	324	551	910	-
12.0		293	584	993	1641	-	180		190	361	614	1015	-
14.0		339	674	1147	1895	-	220		229	436	741	1225	-
16.0		384	765	1300	2149	-	240		249	473	805	1330	-
18.0		430	855	1454	2403	-	250		258	492	836	1383	-
20.0		480	954	1623	2683	-	260		268	511	868	1435	-
22.0		525	1046	1778	2939	-	280		288	548	932	1540	-
24.0		571	1137	1933	3196	-	300		307	585	995	1645	-
26.0		617	1228	2088	3452	-	325		332	632	1075	1777	-
28.0		663	1319	2244	3709	-	350		357	679	1154	1908	-
30.0		715	1424	2421	4003	-	375		381	725	1233	2039	-
32.0		762	1516	2578	4262	-	400		406	772	1313	2170	-
34.0		808	1608	2735	4520	-	425		430	819	1392	2302	-
36.0		854	1700	2891	4779	-	450		455	865	1472	2433	-
38.0		900	1792	3048	5038	-	475		479	912	1551	2564	-
40.0		955	1901	3232	5343	-	500		504	959	1630	2695	-
42.0		1002	1994	-	-	-	525		528	1006	1710	2827	-
44.0		1048	2086	-	-	-	550		553	1052	1789	2958	-
46.0		1095	2179	-	-	-	575		577	1099	1868	3089	-
48.0		1142	2272	-	-	-	600		602	1146	-	-	-
50.0		1198	2385	-	-	-	625		626	1192	-	-	-
							650		651	1239	-	-	-
							675		675	1286	-	-	-
							700		700	1332	-	-	-
							725		724	1379	-	-	-



Cryogenic Safety Valves, angle type, bronze, PN40

$d_0=7.0$ & 10.5mm up to PN50, type tested TÜV-SV.1111. S/G

Standard safety valve,

with PCTFE valve seal (except $d_0 7$, which is metal to metal seated only

and $d_0 10.5$, which is metal to metal seated below 3.0 bar only), closed bonnet, with lifting device

"cleaned and degreased for oxygen service"

Part No. 06425.X.0000

Inlet: male thread type G (BSPP) acc. to ISO 228/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06425.X.2000

Inlet: male thread type R (BSPT) acc. to 7/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06425.X.5000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06425.X.6000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread NPT acc. to ANSI B 1.20.1



Applications:

Provided as safety device for protection against excessive pressure in stationary and moveable gas

cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.


Working temperature: -196°C / -321°F (77K) up to $+185^{\circ}\text{C}$ / $+365^{\circ}\text{F}$ (458K), with PCTFE-seal

up to $+150^{\circ}\text{C}$ / 302°F (423K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Outlet body	CC491K	SB 62 UNS C83600
2 Inlet body	1.4301	SA 479 Grade 304
3 Valve seal	PCTFE	
	1.4571	A 313 Grade 316Ti ($d_0 7$)
	1.4541	A 276 Grade 321 ($d_0 10.5$)
4 Disc	CC493K	B 505 UNS C93200
5 Guide plate	CC493K	B 505 UNS C93200
6 Stem	CW453K	B 103 UNS C52100
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4301	A 276 Grade 304
9 Spring clamp	CW614N	B 455 UNS C38500
10 Thread ring	CW614N	B 455 UNS C38500
11 Lifting cap	CW614N	B 455 UNS C38500
12 Lifting spring	1.4571	A 313 Grade 316Ti
13 Lifting stem	CW614N	B 455 UNS C38500
14 Lever	1.4408	SA351 CF8M

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED) and ASME Code Section VIII.

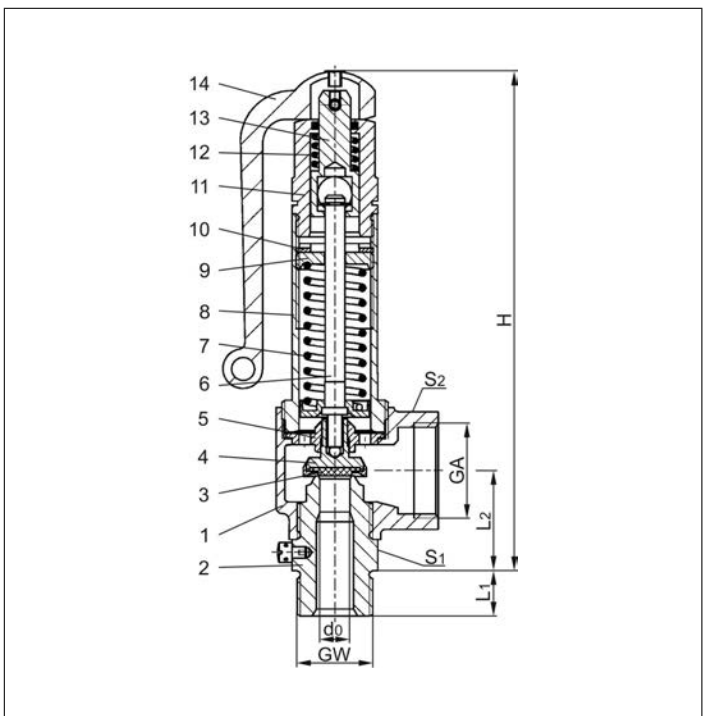

Type 06425	Technical data									
Nominal size	GW	1/2	3/4	1/2	3/4	3/4	1	1	1-1/4	1-1/4
Orifice	d_0	7.0	7.0	10.5	10.5	14.0	14.0	18.0	18.0	23.0
Dimension code	.X.	0704	0706	1004	1006	1406	1410	1810	1812	2312
Set pressure range	bar	0.4-50.0	0.4-50.0	0.4-50.0	0.4-50.0	0.4-40.0	0.4-40.0	0.4-40.0	0.4-40.0	0.4-10.0
Outlet	GA	1	1	1	1	1-1/4	1-1/4	1-1/2	1-1/2	1-1/2
Height	H	176	176	176	176	196	196	239	240	239
Length	A_1	14	16	14	16	16	18	18	20	20
Length	L_1	36	36	36	36	50	50	48	48	48
Length	L_2	36.5	36.5	36.5	34.5	44	44	50.5	51.5	52
Wrench size across flats	S_1	30	30	30	30	41	41	50	50	50
Wrench size across flats	S_2	41	41	41	41	50	50	58	58	58
Weight	ca. kg	1.00	1.02	0.98	1.01	1.50	1.56	2.51	2.63	2.52
Coeff. of disch. from 3.0 bar	α_w	0.78	0.78	0.69	0.69	0.66	0.66	0.66	0.66	0.54

Dimensions in mm.

Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/2 & 3/4	1/2 & 3/4	3/4 & 1	1 & 1-1/4	1-1/4	Set pressure in psig	GW	1/2 & 3/4	1/2 & 3/4	3/4 & 1	1 & 1-1/4	1-1/4
	d ₀ (mm)	7.0	10.5	14.0	18.0	23.0		d ₀ (inch)	0.276	0.413	0.551	0.709	0.906
	A ₀ (mm ²)	38.48	86.59	153.94	254.47	415.48		A ₀ (in ²)	0.060	0.134	0.239	0.394	0.644
Air in m ³ /h							Air in SCFM						
0.4	Medium	24	43	77	123	157	28	Medium	-	-	-	-	298
0.5		27	49	87	141	179	29		42	-	-	-	304
1.0		41	77	131	216	287	35		47	90	154	-	346
1.5		54	101	179	291	376	40		52	100	169	280	382
2.0		66	126	219	362	473	50		62	118	201	333	454
3.0		88	176	299	495	661	60		72	137	233	385	525
4.0		111	221	375	621	829	70		82	156	265	438	597
5.0		134	266	453	748	1000	80		92	174	296	490	669
6.0		156	311	529	875	1169	90		101	193	328	543	740
7.0		179	356	606	1001	1337	100		111	212	360	595	812
8.0		202	402	684	1131	1511	120		131	249	424	700	955
9.0		225	447	761	1258	1680	145		155	296	503	831	1134
10.0		248	494	839	1387	1853	160		170	324	551	910	-
12.0		293	584	993	1641	-	180		190	361	614	1015	-
14.0		339	674	1147	1895	-	220		229	436	741	1225	-
16.0		384	765	1300	2149	-	240		249	473	805	1330	-
18.0		430	855	1454	2403	-	250		258	492	836	1383	-
20.0		480	954	1623	2683	-	260		268	511	868	1435	-
22.0		525	1046	1778	2939	-	280		288	548	932	1540	-
24.0		571	1137	1933	3196	-	300		307	585	995	1645	-
26.0		617	1228	2088	3452	-	325		332	632	1075	1777	-
28.0		663	1319	2244	3709	-	350		357	679	1154	1908	-
30.0		715	1424	2421	4003	-	375		381	725	1233	2039	-
32.0		762	1516	2578	4262	-	400		406	772	1313	2170	-
34.0		808	1608	2735	4520	-	425		430	819	1392	2302	-
36.0		854	1700	2891	4779	-	450		455	865	1472	2433	-
38.0		900	1792	3048	5038	-	475		479	912	1551	2564	-
40.0		955	1901	3232	5343	-	500		504	959	1630	2695	-
42.0		1002	1994	-	-	-	525		528	1006	1710	2827	-
44.0		1048	2086	-	-	-	550		553	1052	1789	2958	-
46.0		1095	2179	-	-	-	575		577	1099	1868	3089	-
48.0		1142	2272	-	-	-	600		602	1146	-	-	-
50.0		1198	2385	-	-	-	625		626	1192	-	-	-
							650		651	1239	-	-	-
							675		675	1286	-	-	-
							700		700	1332	-	-	-
							725		724	1379	-	-	-

Safety Valves

Type 06421



Cryogenic Safety Valves, angle type, bronze, PN40

d₀=7,0 & 10,5mm up to PN50,

type tested TÜV-SV.1111. S/G

Standard safety valve,

with PCTFE valve seal (except d₀7, which is metal to metal seated only

and d₀10.5, which is metal to metal seated below 3.0 bar only), closed bonnet

"cleaned and degreased for oxygen service"

Part No. 06421.X.0000

Inlet: female thread type G (BSPP) acc. to ISO 228/1

Outlet: female thread type G (BSPP) acc. to ISO 228/1




Applications:

Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K), with PCTFE-seal up to +150°C / 302°F (423K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Outlet body	CC491K	SB 62 UNS C83600
2 Inlet body	1.4301	SA 479 Grade 304
3 Valve seal	PCTFE 1.4571 1.4541	A 313 Grade 316Ti (d ₀ 7) A 276 Grade 321 (d ₀ 10.5)
4 Disc	CC493K	B 505 UNS C93200
5 Guide plate	CW493K	B 505 UNS C93200
6 Stem	CW453K	B 103 UNS C52100
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4301	A 276 Grade 304
9 Spring clamp	CW614N	B 455 UNS C38500
10 Thread ring	CW614N	B 455 UNS C38500
11 Cap	CW614N	B 455 UNS C38500

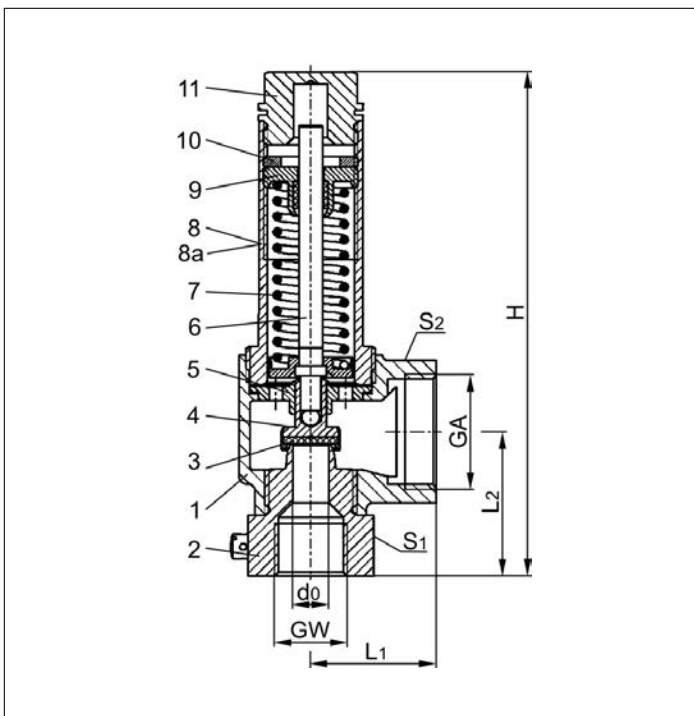

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED) and ASME Code Section VIII.



Type 06421	Technical data					
Nominal size	GW	1/2	1/2	3/4	1	1-1/4
Orifice	d ₀	7.0	10.5	14.0	18.0	23.0
Dimension Code	.X.	0704	1004	1406	1810	2312
Set pressure range	bar	0.4-50.0	0.4-50.0	0.4-40.0	0.4-40.0	0.4-10.0
Outlet	GA	1	1	1-1/4	1-1/2	1-1/2
Height	H	145	145	164	195	200
Length	L ₁	36	36	50	48	48
Length	L ₂	41.5	41.5	49	59.5	65
Wrench size across flats	S ₁	36	36	41	50	50
Wrench size across flats	S ₂	41	41	50	58	58
Weight	ca. kg	0.80	0.795	1.25	1.87	1.79
Coeff. of discharge from 3.0 bar	α _w	0.78	0.69	0.66	0.66	0.54

Dimensions in mm.

Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/2	1/2	3/4	1	1-1/4
	d ₀ (mm)	7.0	10.5	14.0	18.0	23.0
	A ₀ (mm ²)	38.48	86.59	153.94	254.47	415.48
	Medium	Air in m ³ /h				
0.4		24	43	77	123	157
0.5		27	49	87	141	179
1.0		41	77	131	216	287
1.5		54	101	179	291	376
2.0		66	126	219	362	473
3.0		88	176	299	495	661
4.0		111	221	375	621	829
5.0		134	266	453	748	1000
6.0		156	311	529	875	1169
7.0		179	356	606	1001	1337
8.0		202	402	684	1131	1511
9.0		225	447	761	1258	1680
10.0		248	494	839	1387	1853
12.0		293	584	993	1641	-
14.0		339	674	1147	1895	-
16.0		384	765	1300	2149	-
18.0		430	855	1454	2403	-
20.0		480	954	1623	2683	-
22.0		525	1046	1778	2939	-
24.0		571	1137	1933	3196	-
26.0		617	1228	2088	3452	-
28.0		663	1319	2244	3709	-
30.0		715	1424	2421	4003	-
32.0		762	1516	2578	4262	-
34.0		808	1608	2735	4520	-
36.0		854	1700	2891	4779	-
38.0		900	1792	3048	5038	-
40.0		955	1901	3232	5343	-
42.0		1002	1994	-	-	-
44.0		1048	2086	-	-	-
46.0		1095	2179	-	-	-
48.0		1142	2272	-	-	-
50.0		1198	2385	-	-	-

Set pressure in psig	GW	1/2	1/2	3/4	1	1-1/4
	d ₀ (inch)	0.276	0.413	0.551	0.709	0.906
	A ₀ (in ²)	0.060	0.134	0.239	0.394	0.644
	Medium	Air in SCFM				
28		-	-	-	-	298
29		42	-	-	-	304
35		47	90	154	-	346
40		52	100	169	280	382
50		62	118	201	333	454
60		72	137	233	385	525
70		82	156	265	438	597
80		92	174	296	490	669
90		101	193	328	543	740
100		111	212	360	595	812
120		131	249	424	700	955
145		155	296	503	831	1134
160		170	324	551	910	-
180		190	361	614	1015	-
220		229	436	741	1225	-
240		249	473	805	1330	-
250		258	492	836	1383	-
260		268	511	868	1435	-
280		288	548	932	1540	-
300		307	585	995	1645	-
325		332	632	1075	1777	-
350		357	679	1154	1908	-
375		381	725	1233	2039	-
400		406	772	1313	2170	-
425		430	819	1392	2302	-
450		455	865	1472	2433	-
475		479	912	1551	2564	-
500		504	959	1630	2695	-
525		528	1006	1710	2827	-
550		553	1052	1789	2958	-
575		577	1099	1868	3089	-
600		602	1146	-	-	-
625		626	1192	-	-	-
650		651	1239	-	-	-
675		675	1286	-	-	-
700		700	1332	-	-	-
725		724	1379	-	-	-

Safety Valves

Type 06426



Cryogenic Safety Valves, angle type, bronze, PN40

d₀=7,0 & 10,5mm up to PN50,

type tested TÜV-SV.1111. S/G

Standard safety valve,

with PCTFE valve seal (except d₀7, which is metal to metal seated only

and d₀10.5, which is metal to metal seated below 3.0 bar only), closed bonnet, with lifting device

"cleaned and degreased for oxygen service"

Part No. 06426.X.0000

Inlet: female thread type G (BSPP) acc. to ISO 228/1

Outlet: female thread type G (BSPP) acc. to ISO 228/1



Applications:

Provided as safety device for protection against excessive pressure in stationary and moveable gas


cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K), with PCTFE-seal up to +150°C / 302°F (423K),

suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Outlet body	CC491K	SB 62 UNS C83600
2 Inlet body	1.4301	SA 479 Grade 304
3 Valve seal	PCTFE	
	1.4571	A 313 Grade 316Ti (d ₀ 7)
	1.4541	A 276 Grade 321 (d ₀ 10.5)
4 Disc	CC493K	B 505 UNS C93200
5 Guide plate	CC493K	B 505 UNS C93200
6 Stem	CW453K	B 103 UNS C52100
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4301	A 276 Grade 304
9 Spring clamp	CW614N	B 455 UNS C38500
10 Thread ring	CW614N	B 455 UNS C38500
11 Lifting cap	CW614N	B 455 UNS C38500
12 Lifting spring	1.4571	A 313 Grade 316Ti
13 Lifting stem	CW614N	B 455 UNS C38500
14 Lever	1.4408	SA351 CF8M

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

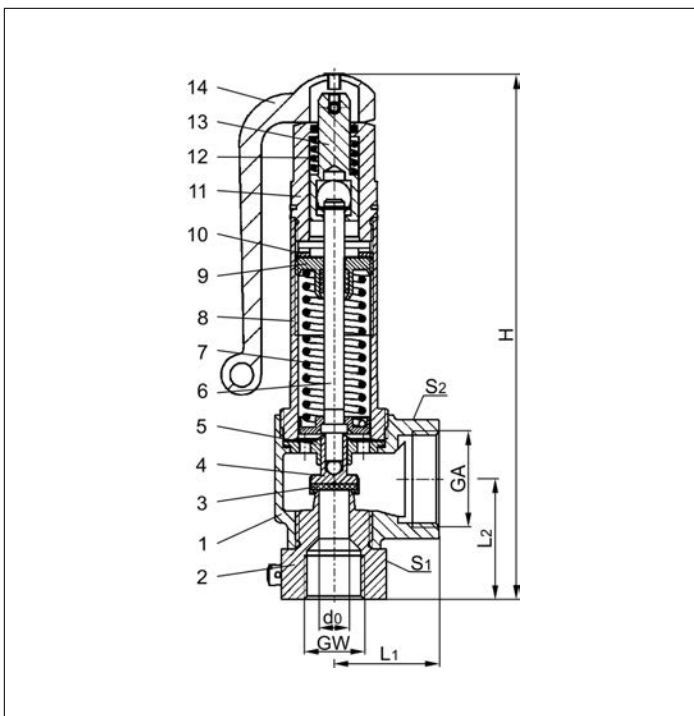

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED) and ASME Code Section VIII.



Type 06426	Technical Data					
Nominal size	GW	1/2	1/2	3/4	1	1-1/4
Orifice	d ₀	7.0	10.5	14.0	18.0	23.0
Dimension code	.X.	0704	1004	1406	1810	2312
Set pressure range	bar	0.4-50.0	0.4-50.0	0.4-40.0	0.4-40.0	0.4-10.0
Outlet	GA	1	1	1-1/4	1-1/2	1-1/2
Height	H	181	181	201	247	252
Length	L ₁	36	36	50	48	48
Length	L ₂	41.5	41.5	49	59.5	65
Wrench size across flats	S ₁	36	36	41	50	50
Wrench size across flats	S ₂	41	41	50	58	58
Weight	ca. kg	1.02	1.01	1.50	2.45	2.40
Coeff. of discharge from 3.0 bar	α _w	0.78	0.69	0.66	0.66	0.54

Dimensions in mm.

Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/2	1/2	3/4	1	1-1/4
	d ₀ (mm)	7.0	10.5	14.0	18.0	23.0
	A ₀ (mm ²)	38.48	86.59	153.94	254.47	415.48
	Medium	Air in m ³ /h				
0.4		24	43	77	123	157
0.5		27	49	87	141	179
1.0		41	77	131	216	287
1.5		54	101	179	291	376
2.0		66	126	219	362	473
3.0		88	176	299	495	661
4.0		111	221	375	621	829
5.0		134	266	453	748	1000
6.0		156	311	529	875	1169
7.0		179	356	606	1001	1337
8.0		202	402	684	1131	1511
9.0		225	447	761	1258	1680
10.0		248	494	839	1387	1853
12.0		293	584	993	1641	-
14.0		339	674	1147	1895	-
16.0		384	765	1300	2149	-
18.0		430	855	1454	2403	-
20.0		480	954	1623	2683	-
22.0		525	1046	1778	2939	-
24.0		571	1137	1933	3196	-
26.0		617	1228	2088	3452	-
28.0		663	1319	2244	3709	-
30.0		715	1424	2421	4003	-
32.0		762	1516	2578	4262	-
34.0		808	1608	2735	4520	-
36.0		854	1700	2891	4779	-
38.0		900	1792	3048	5038	-
40.0		955	1901	3232	5343	-
42.0		1002	1994	-	-	-
44.0		1048	2086	-	-	-
46.0		1095	2179	-	-	-
48.0		1142	2272	-	-	-
50.0		1198	2385	-	-	-

Set pressure in psig	GW	1/2	1/2	3/4	1	1-1/4
	d ₀ (inch)	0.276	0.413	0.551	0.709	0.906
	A ₀ (in ²)	0.060	0.134	0.239	0.394	0.644
	Medium	Air in SCFM				
28		-	-	-	-	298
29		42	-	-	-	304
35		47	90	154	-	346
40		52	100	169	280	382
50		62	118	201	333	454
60		72	137	233	385	525
70		82	156	265	438	597
80		92	174	296	490	669
90		101	193	328	543	740
100		111	212	360	595	812
120		131	249	424	700	955
145		155	296	503	831	1134
160		170	324	551	910	-
180		190	361	614	1015	-
220		229	436	741	1225	-
240		249	473	805	1330	-
250		258	492	836	1383	-
260		268	511	868	1435	-
280		288	548	932	1540	-
300		307	585	995	1645	-
325		332	632	1075	1777	-
350		357	679	1154	1908	-
375		381	725	1233	2039	-
400		406	772	1313	2170	-
425		430	819	1392	2302	-
450		455	865	1472	2433	-
475		479	912	1551	2564	-
500		504	959	1630	2695	-
525		528	1006	1710	2827	-
550		553	1052	1789	2958	-
575		577	1099	1868	3089	-
600		602	1146	-	-	-
625		626	1192	-	-	-
650		651	1239	-	-	-
675		675	1286	-	-	-
700		700	1332	-	-	-
725		724	1379	-	-	-

Safety Valves

Type 06440

HEROSE



Cryogenic Safety Valves, angle type, stainless steel, PN40

d₀=7.0 & 10.5mm up to PN50

type tested TÜV-SV.1111. S/G

Standard safety valve,

with PCTFE valve seal, (except d₀7, which is metal to metal seated only

and d₀10.5, which is metal to metal seated below 3.0 bar only), closed bonnet

"cleaned and degreased for oxygen service"

Part No. 06440.X.0000

Inlet: male thread type G (BSPP) acc. to ISO 228/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06440.X.2000

Inlet: male thread type R (BSPT) acc. to ISO 7/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06440.X.5000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06440.X.6000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread NPT acc. to ANSI B 1.20.1



Applications:

Provided as safety device for protection against excessive pressure in stationary and moveable gas


cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K), with PCTFE-seal up to +150°C / 302°F (423K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Outlet body	1.4308	SA351 CF8
2 Inlet body	1.4301	SA479 Grade 304
3 Valve seal	PCTFE	
	1.4571	A 313 Grade 316Ti (d ₀ 7)
	1.4541	A 276 Grade 321 (d ₀ 10.5)
4 Disc	1.4541	A276 Grade 321
5 Guide plate	1.4301	SA479 Grade 304
6 Stem	1.4301	SA479 Grade 304
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4301	A 276 Grade 304
9 Spring clamp	1.4301	SA479 Grade 304
10 Thread ring	1.4301	SA479 Grade 304
11 Cap	1.4301	SA479 Grade 304

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED) and ASME Code Section VIII.

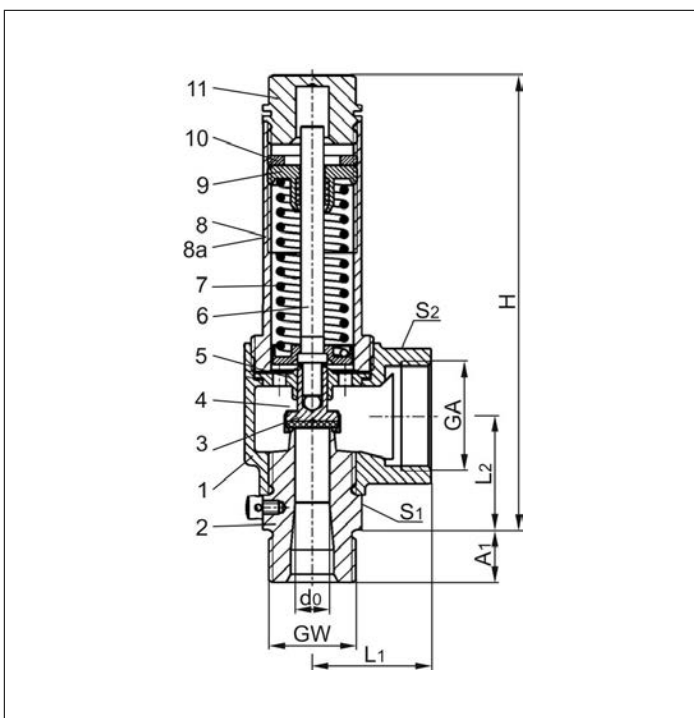

Type 06420	Technical data									
Nominal size	GW	1/2	3/4	1/2	3/4	3/4	1	1	1-1/4	1-1/4
Orifice	d ₀	7.0	7.0	10.5	10.5	14.0	14.0	18.0	18.0	23.0
Dimension code	.X.	0704	0706	1004	1006	1406	1410	1810	1812	2312
Set pressure range	bar	0.4-50.0	0.4-50.0	0.4-50.0	0.4-50.0	0.4-40.0	0.4-40.0	0.4-40.0	0.4-40.0	0.4-10.0
Outlet	GA	1	1	1	1	1-1/4	1-1/4	1-1/2	1-1/2	1-1/2
Height	H	140	140	140	140	159	159	186	187	187
Length	A ₁	14	16	14	16	16	18	18	20	20
Length	L ₁	36	36	36	36	50	50	48	48	48
Length	L ₂	36.5	36.5	36.5	34.5	44	44	50.5	51.5	52
Wrench size across flats	S ₁	30	30	30	30	41	41	50	50	50
Wrench size across flats	S ₂	41	41	41	41	50	50	58	58	58
Weight	ca. kg	0.78	0.80	0.76	0.79	1.25	1.31	1.87	1.99	1.90
Coeff. of disch. from 3.0 bar	α _w	0.78	0.78	0.69	0.69	0.66	0.66	0.66	0.66	0.54

Dimensions in mm.

Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/2 & 3/4	1/2 & 3/4	3/4 & 1	1 & 1-1/4	1-1/4
	d ₀ (mm)	7.0	10.5	14.0	18.0	23.0
	A ₀ (mm ²)	38.48	86.59	153.94	254.47	415.48
	Medium	Air in m ³ /h				
0.4		24	43	77	123	157
0.5		27	49	87	141	179
1.0		41	77	131	216	287
1.5		54	101	179	291	376
2.0		66	126	219	362	473
3.0		88	176	299	495	661
4.0		111	221	375	621	829
5.0		134	266	453	748	1000
6.0		156	311	529	875	1169
7.0		179	356	606	1001	1337
8.0		202	402	684	1131	1511
9.0		225	447	761	1258	1680
10.0		248	494	839	1387	1853
12.0		293	584	993	1641	-
14.0		339	674	1147	1895	-
16.0		384	765	1300	2149	-
18.0		430	855	1454	2403	-
20.0		480	954	1623	2683	-
22.0		525	1046	1778	2939	-
24.0		571	1137	1933	3196	-
26.0		617	1228	2088	3452	-
28.0		663	1319	2244	3709	-
30.0		715	1424	2421	4003	-
32.0		762	1516	2578	4262	-
34.0		808	1608	2735	4520	-
36.0		854	1700	2891	4779	-
38.0		900	1792	3048	5038	-
40.0		955	1901	3232	5343	-
42.0		1002	1994	-	-	-
44.0		1048	2086	-	-	-
46.0		1095	2179	-	-	-
48.0		1142	2272	-	-	-
50.0		1198	2385	-	-	-

Set pressure in psig	GW	1/2 & 3/4	1/2 & 3/4	3/4 & 1	1 & 1-1/4	1-1/4
	d ₀ (inch)	0.276	0.413	0.551	0.709	0.906
	A ₀ (in ²)	0.060	0.134	0.239	0.394	0.644
	Medium	Air in SCFM				
28		-	-	-	-	298
29		42	-	-	-	304
35		47	90	154	-	346
40		52	100	169	280	382
50		62	118	201	333	454
60		72	137	233	385	525
70		82	156	265	438	597
80		92	174	296	490	669
90		101	193	328	543	740
100		111	212	360	595	812
120		131	249	424	700	955
145		155	296	503	831	1134
160		170	324	551	910	-
180		190	361	614	1015	-
220		229	436	741	1225	-
240		249	473	805	1330	-
250		258	492	836	1383	-
260		268	511	868	1435	-
280		288	548	932	1540	-
300		307	585	995	1645	-
325		332	632	1075	1777	-
350		357	679	1154	1908	-
375		381	725	1233	2039	-
400		406	772	1313	2170	-
425		430	819	1392	2302	-
450		455	865	1472	2433	-
475		479	912	1551	2564	-
500		504	959	1630	2695	-
525		528	1006	1710	2827	-
550		553	1052	1789	2958	-
575		577	1099	1868	3089	-
600		602	1146	-	-	-
625		626	1192	-	-	-
650		651	1239	-	-	-
675		675	1286	-	-	-
700		700	1332	-	-	-
725		724	1379	-	-	-



Cryogenic Safety Valves, angle type, stainless steel, PN40
d₀=7.0 & 10.5mm up to PN50, type tested TÜV-SV.1111. S/G

Standard safety valve,

with PCTFE valve seal (except d₀7, which is metal to metal seated only

and d₀10.5, which is metal to metal seated below 3.0 bar only), closed bonnet, with lifting device

"cleaned and degreased for oxygen service"

Part No. 06445.X.0000

Inlet: male thread type G (BSPP) acc. to ISO 228/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06445.X.2000

Inlet: male thread type R (BSPT) acc. to 7/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06445.X.5000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06445.X.6000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread NPT acc. to ANSI B 1.20.1



Applications:


Provided as safety device for protection against excessive pressure in stationary and moveable gas

cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K), with PCTFE-seal

up to +150°C / 302°F (423K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Outlet body	1.4308	SA351 CF8
2 Inlet body	1.4301	A 479 Grade 304
3 Valve seal	PCTFE	
	1.4571	A 313 Grade 316Ti (d ₀ 7)
	1.4541	A 276 Grade 321 (d ₀ 10.5)
4 Disc	1.4541	A 276 Grade 321
5 Guide plate	1.4301	A 479 Grade 304
6 Stem	1.4301	A 479 Grade 304
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4301	A 276 Grade 304
9 Spring clamp	1.4301	A 479 Grade 304
10 Thread ring	1.4301	A 479 Grade 304
11 Lifting cap	1.4301	A 479 Grade 304
12 Lifting spring	1.4571	A 313 Grade 316Ti
13 Lifting stem	1.4301	A 479 Grade 304
14 Lever	1.4408	SA351 CF8M

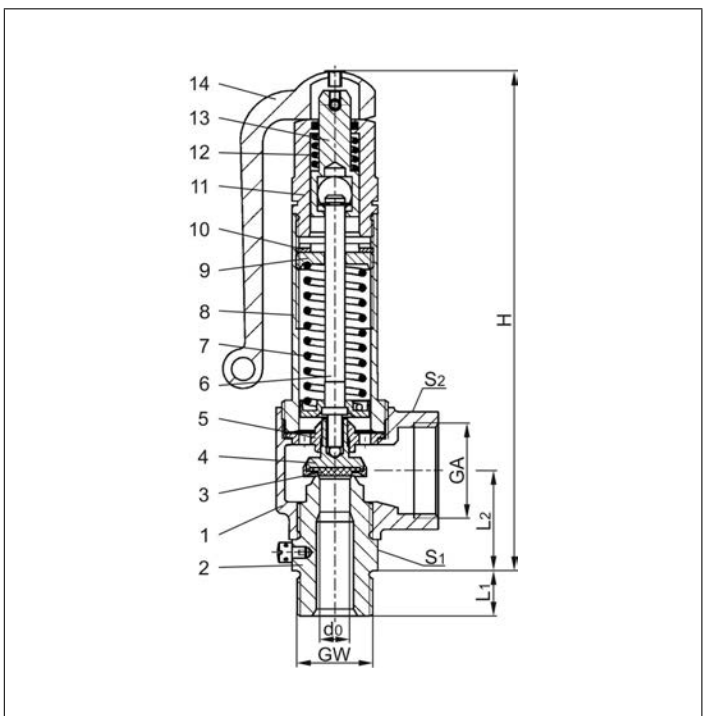

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED) and ASME Code Section VIII.



Type 06425	Technical data									
Nominal size	GW	1/2	3/4	1/2	3/4	3/4	1	1	1-1/4	1-1/4
Orifice	d ₀	7.0	7.0	10.5	10.5	14.0	14.0	18.0	18.0	23.0
Dimension code	.X.	0704	0706	1004	1006	1406	1410	1810	1812	2312
Set pressure range	bar	0.4-50.0	0.4-50.0	0.4-50.0	0.4-50.0	0.4-40.0	0.4-40.0	0.4-40.0	0.4-40.0	0.4-10.0
Outlet	GA	1	1	1	1	1-1/4	1-1/4	1-1/2	1-1/2	1-1/2
Height	H	176	176	176	176	196	196	239	240	239
Length	A ₁	14	16	14	16	16	18	18	20	20
Length	L ₁	36	36	36	36	50	50	48	48	48
Length	L ₂	36.5	36.5	36.5	34.5	44	44	50.5	51.5	52
Wrench size across flats	S ₁	30	30	30	30	41	41	50	50	50
Wrench size across flats	S ₂	41	41	41	41	50	50	58	58	58
Weight	ca. kg	1.00	1.02	0.98	1.01	1.50	1.56	2.51	2.63	2.52
Coeff. of disch. from 3.0 bar	α _w	0.78	0.78	0.69	0.69	0.66	0.66	0.66	0.66	0.54

Dimensions in mm.

Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/2 & 3/4	1/2 & 3/4	3/4 & 1	1 & 1-1/4	1-1/4
d ₀ (mm)		7.0	10.5	14.0	18.0	23.0
A ₀ (mm ²)		38.48	86.59	153.94	254.47	415.48
Medium	Air in m ³ /h					
0.4		24	43	77	123	157
0.5		27	49	87	141	179
1.0		41	77	131	216	287
1.5		54	101	179	291	376
2.0		66	126	219	362	473
3.0		88	176	299	495	661
4.0		111	221	375	621	829
5.0		134	266	453	748	1000
6.0		156	311	529	875	1169
7.0		179	356	606	1001	1337
8.0		202	402	684	1131	1511
9.0		225	447	761	1258	1680
10.0		248	494	839	1387	1853
12.0		293	584	993	1641	-
14.0		339	674	1147	1895	-
16.0		384	765	1300	2149	-
18.0		430	855	1454	2403	-
20.0		480	954	1623	2683	-
22.0		525	1046	1778	2939	-
24.0		571	1137	1933	3196	-
26.0		617	1228	2088	3452	-
28.0		663	1319	2244	3709	-
30.0		715	1424	2421	4003	-
32.0		762	1516	2578	4262	-
34.0		808	1608	2735	4520	-
36.0		854	1700	2891	4779	-
38.0		900	1792	3048	5038	-
40.0		955	1901	3232	5343	-
42.0		1002	1994	-	-	-
44.0		1048	2086	-	-	-
46.0		1095	2179	-	-	-
48.0		1142	2272	-	-	-
50.0		1198	2385	-	-	-

Set pressure in psig	GW	1/2 & 3/4	1/2 & 3/4	3/4 & 1	1 & 1-1/4	1-1/4
d ₀ (inch)		0.276	0.413	0.551	0.709	0.906
A ₀ (in ²)		0.060	0.134	0.239	0.394	0.644
Medium	Air in SCFM					
28		-	-	-	-	298
29		42	-	-	-	304
35		47	90	154	-	346
40		52	100	169	280	382
50		62	118	201	333	454
60		72	137	233	385	525
70		82	156	265	438	597
80		92	174	296	490	669
90		101	193	328	543	740
100		111	212	360	595	812
120		131	249	424	700	955
145		155	296	503	831	1134
160		170	324	551	910	-
180		190	361	614	1015	-
220		229	436	741	1225	-
240		249	473	805	1330	-
250		258	492	836	1383	-
260		268	511	868	1435	-
280		288	548	932	1540	-
300		307	585	995	1645	-
325		332	632	1075	1777	-
350		357	679	1154	1908	-
375		381	725	1233	2039	-
400		406	772	1313	2170	-
425		430	819	1392	2302	-
450		455	865	1472	2433	-
475		479	912	1551	2564	-
500		504	959	1630	2695	-
525		528	1006	1710	2827	-
550		553	1052	1789	2958	-
575		577	1099	1868	3089	-
600		602	1146	-	-	-
625		626	1192	-	-	-
650		651	1239	-	-	-
675		675	1286	-	-	-
700		700	1332	-	-	-
725		724	1379	-	-	-

Safety Valves

Type 06441



Cryogenic Safety Valves, angle type, stainless steel, PN40
d₀=7,0 & 10,5mm up to PN50,
type tested TÜV-SV.1111. S/G

Standard safety valve,
 with PCTFE valve seal (except d₀7, which is metal to metal seated only
 and d₀10.5, which is metal to metal seated below 3.0 bar only), closed bonnet
 "cleaned and degreased for oxygen service"

Part No. 06441.X.0000

Inlet: female thread type G (BSPP) acc. to ISO 228/1

Outlet: female thread type G (BSPP) acc. to ISO 228/1



Applications:


Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K), with PCTFE-seal
 up to +150°C / 302°F (423K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Outlet body	1.4308	SA351 CF8
2 Inlet body	1.4301	A 479 Grade 304
3 Valve seal	PCTFE	
	1.4571	A 313 Grade 316Ti (d ₀ 7)
	1.4541	A 276 Grade 321 (d ₀ 10.5)
4 Disc	1.4541	A 276 Grade 321
5 Guide plate	1.4301	A 479 Grade 304
6 Stem	1.4301	A 479 Grade 304
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4301	A 276 Grade 304
9 Spring clamp	1.4301	A 479 Grade 304
10 Thread ring	1.4301	A 479 Grade 304
11 Cap	1.4301	A 479 Grade 304

Essential: Valves are delivered at a set pressure,
 therefore when ordering please confirm set
 pressure, medium and temperature.

Standard marking acc. to Pressure Equipment
 Directive 2014/68/EU (PED) and ASME Code
 Section VIII.

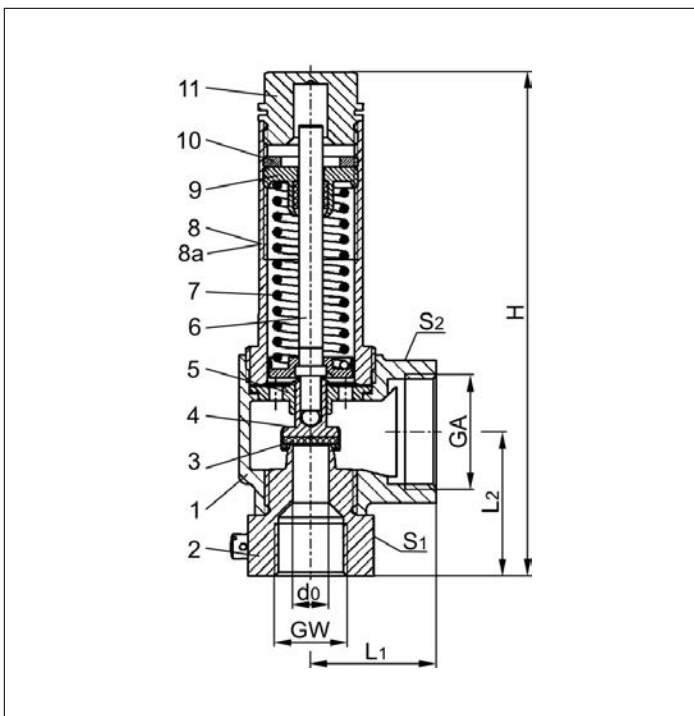

Type 06421	Technical data					
Nominal size	GW	1/2	1/2	3/4	1	1-1/4
Orifice	d ₀	7.0	10.5	14.0	18.0	23.0
Dimension Code	.X.	0704	1004	1406	1810	2312
Set pressure range	bar	0.4-50.0	0.4-50.0	0.4-40.0	0.4-40.0	0.4-10.0
Outlet	GA	1	1	1-1/4	1-1/2	1-1/2
Height	H	145	145	164	195	200
Length	L ₁	36	36	50	48	48
Length	L ₂	41.5	41.5	49	59.5	65
Wrench size across flats	S ₁	36	36	41	50	50
Wrench size across flats	S ₂	41	41	50	58	58
Weight	ca. kg	0.80	0.795	1.25	1.87	1.79
Coeff. of discharge from 3.0 bar	α _w	0.78	0.69	0.66	0.66	0.54

Dimensions in mm.

Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/2	1/2	3/4	1	1-1/4
	d ₀ (mm)	7.0	10.5	14.0	18.0	23.0
	A ₀ (mm ²)	38.48	86.59	153.94	254.47	415.48
	Medium	Air in m ³ /h				
0.4		24	43	77	123	157
0.5		27	49	87	141	179
1.0		41	77	131	216	287
1.5		54	101	179	291	376
2.0		66	126	219	362	473
3.0		88	176	299	495	661
4.0		111	221	375	621	829
5.0		134	266	453	748	1000
6.0		156	311	529	875	1169
7.0		179	356	606	1001	1337
8.0		202	402	684	1131	1511
9.0		225	447	761	1258	1680
10.0		248	494	839	1387	1853
12.0		293	584	993	1641	-
14.0		339	674	1147	1895	-
16.0		384	765	1300	2149	-
18.0		430	855	1454	2403	-
20.0		480	954	1623	2683	-
22.0		525	1046	1778	2939	-
24.0		571	1137	1933	3196	-
26.0		617	1228	2088	3452	-
28.0		663	1319	2244	3709	-
30.0		715	1424	2421	4003	-
32.0		762	1516	2578	4262	-
34.0		808	1608	2735	4520	-
36.0		854	1700	2891	4779	-
38.0		900	1792	3048	5038	-
40.0		955	1901	3232	5343	-
42.0		1002	1994	-	-	-
44.0		1048	2086	-	-	-
46.0		1095	2179	-	-	-
48.0		1142	2272	-	-	-
50.0		1198	2385	-	-	-

Set pressure in psig	GW	1/2	1/2	3/4	1	1-1/4
	d ₀ (inch)	0.276	0.413	0.551	0.709	0.906
	A ₀ (in ²)	0.060	0.134	0.239	0.394	0.644
	Medium	Air in SCFM				
28		-	-	-	-	298
29		42	-	-	-	304
35		47	90	154	-	346
40		52	100	169	280	382
50		62	118	201	333	454
60		72	137	233	385	525
70		82	156	265	438	597
80		92	174	296	490	669
90		101	193	328	543	740
100		111	212	360	595	812
120		131	249	424	700	955
145		155	296	503	831	1134
160		170	324	551	910	-
180		190	361	614	1015	-
220		229	436	741	1225	-
240		249	473	805	1330	-
250		258	492	836	1383	-
260		268	511	868	1435	-
280		288	548	932	1540	-
300		307	585	995	1645	-
325		332	632	1075	1777	-
350		357	679	1154	1908	-
375		381	725	1233	2039	-
400		406	772	1313	2170	-
425		430	819	1392	2302	-
450		455	865	1472	2433	-
475		479	912	1551	2564	-
500		504	959	1630	2695	-
525		528	1006	1710	2827	-
550		553	1052	1789	2958	-
575		577	1099	1868	3089	-
600		602	1146	-	-	-
625		626	1192	-	-	-
650		651	1239	-	-	-
675		675	1286	-	-	-
700		700	1332	-	-	-
725		724	1379	-	-	-

Safety Valves

Type 06446



Cryogenic Safety Valves, angle type, stainless steel, PN40
d₀=7,0 & 10,5mm up to PN50,
type tested TÜV-SV.1111. S/G

Standard safety valve,
 with PCTFE valve seal (except d₀7, which is metal to metal seated only
 and d₀10.5, which is metal to metal seated below 3.0 bar only), closed bonnet, with lifting device
 "cleaned and degreased for oxygen service"

Part No. 06446.X.0000

Inlet: female thread type G (BSPP) acc. to ISO 228/1

Outlet: female thread type G (BSPP) acc. to ISO 228/1




Applications:

Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
 Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K), with PCTFE-seal
 up to +150°C / 302°F (423K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Outlet body	1.4308	SA351 CF8
2 Inlet body	1.4301	A 479 Grade 304
3 Valve seal	PCTFE	
	1.4571	A 313 Grade 316Ti (d ₀ 7)
	1.4541	A 276 Grade 321 (d ₀ 10.5)
4 Disc	1.4541	A 276 Grade 321
5 Guide plate	1.4301	A 479 Grade 304
6 Stem	1.4301	A 479 Grade 304
7 Spring	1.4571	A 313 Grade 316Ti
8 Bonnet	1.4301	A 276 Grade 304
9 Spring clamp	1.4301	A 479 Grade 304
10 Thread ring	1.4301	A 479 Grade 304
11 Lifting cap	1.4301	A 479 Grade 304
12 Lifting spring	1.4571	A 313 Grade 316Ti
13 Lifting stem	1.4301	A 479 Grade 304
14 Lever	1.4408	SA351 CF8M

Essential: Valves are delivered at a set pressure,
 therefore when ordering please confirm set
 pressure, medium and temperature.

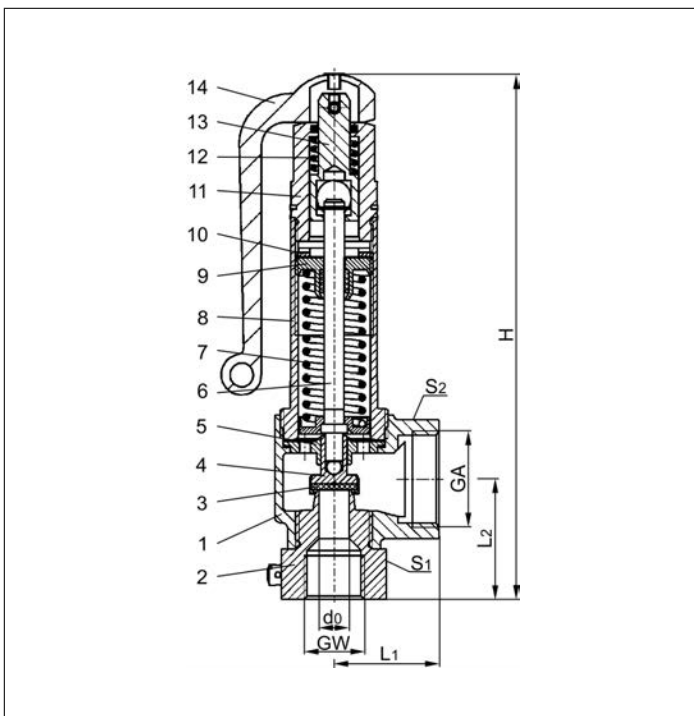

Standard marking acc. to Pressure Equipment
 Directive 2014/68/EU (PED) and ASME Code
 Section VIII.



Type 06426	Technical Data					
Nominal size	GW	1/2	1/2	3/4	1	1-1/4
Orifice	d ₀	7.0	10.5	14.0	18.0	23.0
Dimension code	.X.	0704	1004	1406	1810	2312
Set pressure range	bar	0.4-50.0	0.4-50.0	0.4-40.0	0.4-40.0	0.4-10.0
Outlet	GA	1	1	1-1/4	1-1/2	1-1/2
Height	H	181	181	201	247	252
Length	L ₁	36	36	50	48	48
Length	L ₂	41.5	41.5	49	59.5	65
Wrench size across flats	S ₁	36	36	41	50	50
Wrench size across flats	S ₂	41	41	50	58	58
Weight	ca. kg	1.02	1.01	1.50	2.45	2.40
Coeff. of discharge from 3.0 bar	α _w	0.78	0.69	0.66	0.66	0.54

Dimensions in mm.

Discharge capacities

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Air in SCFM at 60°F (15.6°C) and 14.7 psia (1013.25 mbar)

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Calculation of discharge capacity acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1 resp. ASME Code Sec. VIII.

Set pressure in bar (g)	GW	1/2	1/2	3/4	1	1-1/4
	d ₀ (mm)	7.0	10.5	14.0	18.0	23.0
	A ₀ (mm ²)	38.48	86.59	153.94	254.47	415.48
	Medium	Air in m ³ /h				
0.4		24	43	77	123	157
0.5		27	49	87	141	179
1.0		41	77	131	216	287
1.5		54	101	179	291	376
2.0		66	126	219	362	473
3.0		88	176	299	495	661
4.0		111	221	375	621	829
5.0		134	266	453	748	1000
6.0		156	311	529	875	1169
7.0		179	356	606	1001	1337
8.0		202	402	684	1131	1511
9.0		225	447	761	1258	1680
10.0		248	494	839	1387	1853
12.0		293	584	993	1641	-
14.0		339	674	1147	1895	-
16.0		384	765	1300	2149	-
18.0		430	855	1454	2403	-
20.0		480	954	1623	2683	-
22.0		525	1046	1778	2939	-
24.0		571	1137	1933	3196	-
26.0		617	1228	2088	3452	-
28.0		663	1319	2244	3709	-
30.0		715	1424	2421	4003	-
32.0		762	1516	2578	4262	-
34.0		808	1608	2735	4520	-
36.0		854	1700	2891	4779	-
38.0		900	1792	3048	5038	-
40.0		955	1901	3232	5343	-
42.0		1002	1994	-	-	-
44.0		1048	2086	-	-	-
46.0		1095	2179	-	-	-
48.0		1142	2272	-	-	-
50.0		1198	2385	-	-	-

Set pressure in psig	GW	1/2	1/2	3/4	1	1-1/4
	d ₀ (inch)	0.276	0.413	0.551	0.709	0.906
	A ₀ (in ²)	0.060	0.134	0.239	0.394	0.644
	Medium	Air in SCFM				
28		-	-	-	-	298
29		42	-	-	-	304
35		47	90	154	-	346
40		52	100	169	280	382
50		62	118	201	333	454
60		72	137	233	385	525
70		82	156	265	438	597
80		92	174	296	490	669
90		101	193	328	543	740
100		111	212	360	595	812
120		131	249	424	700	955
145		155	296	503	831	1134
160		170	324	551	910	-
180		190	361	614	1015	-
220		229	436	741	1225	-
240		249	473	805	1330	-
250		258	492	836	1383	-
260		268	511	868	1435	-
280		288	548	932	1540	-
300		307	585	995	1645	-
325		332	632	1075	1777	-
350		357	679	1154	1908	-
375		381	725	1233	2039	-
400		406	772	1313	2170	-
425		430	819	1392	2302	-
450		455	865	1472	2433	-
475		479	912	1551	2564	-
500		504	959	1630	2695	-
525		528	1006	1710	2827	-
550		553	1052	1789	2958	-
575		577	1099	1868	3089	-
600		602	1146	-	-	-
625		626	1192	-	-	-
650		651	1239	-	-	-
675		675	1286	-	-	-
700		700	1332	-	-	-
725		724	1379	-	-	-

Safety Valves

Type 06801 with bellow seal



Stainless steel bellow sealed Safety Valves, angle type, PN40, type tested TÜV-SV.1105. S/G/L orifice $d_0 = 12.5$ mm TÜV-SV.1105. only S/G

Standard safety valve,
metal to metal seated, closed bonnet
"cleaned and degreased for oxygen service"

Part No. 06801.X.0000

Inlet: male thread type G (BSPP) acc. to ISO 228/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06801.X.2000

Inlet: male thread type R (BSPT) acc. to ISO 7/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06801.X.5000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06801.X.6000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread NPT acc. to ANSI B 1.20.1

Applications:

Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for non-inflammable and inflammable vapours, gases and fluids.

Working temperature: -270°C / -454°F (3K) up to $+225^{\circ}\text{C}$ / $+437^{\circ}\text{F}$ (498K)

Maximum allowed back pressure: 15% of set pressure, pressure-temperature must be observed




Materials	DIN EN	ASME/ASTM
1 Inlet body	1.4571	A 276 Grade 316Ti
2 Outlet body	1.4308	A 351 CF8
3 Disc	1.4541	A 276 Grade 321
4 Bellow	1.4571	A 276 Grade 316Ti
5 Bellow stem	1.4571	A 276 Grade 316Ti
6 Stem	CW453K	B 103 UNS C52100
7 Bonnet	1.4301	A 276 Grade 304
8 Spring	1.4571	A 276 Grade 316Ti
9 Cap	1.4301	A 276 Grade 304

Important:

For nominal size GW 3/4, $d_0 = 15.0$ mm the back pressure reduces the blow off performance of the safety valve (see diagram 06801-3/4).

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

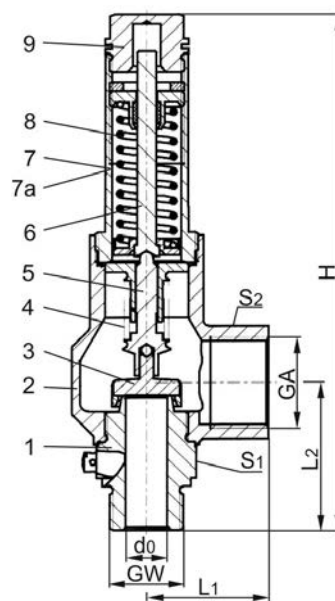

Type 06801	Technical data				
Nominal size	GW	1/2	3/4	1	1
Orifice	d_0	12.5	15	20	23
Dimension code	.X.	1204	1506	2010	2310
Set pressure range	bar	3.0-25.0	3.0-25.0	3.0-25.0	3.0-25.0
Outlet	GA	G 1	G 1	G 1-1/4	G 1-1/2
Height	H	186	190	205	255
Length	L_1	44	44	51	56
Length	L_2	52	54	63	65
Wrench size across flats	S_1	36	36	41	50
Wrench size across flats	S_2	41	41	50	55
Weight	ca. kg	1.03	1.05	1.70	2.45
Coeff. of discharge vapours, gases	α_w	0.60	0.50	0.60	0.66
Coeff. of discharge fluids	α_w	-	0.39	0.45	0.48

Dimensions in mm.

Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Water in kg/h

Saturated steam in kg/h

The capacity indicated below is for a fully opened valve.

Maximum allowed back pressure: 15% of set pressure.



For nominal size GW 3/4 the back pressure reduces the blow off performance of the safety valve (see diagram 06801-3/4).

d₀ - orifice

A₀ - flow area

Set pressure in bar (g)	GW	1/2	3/4	1	1	1/2	3/4	1	1	3/4	1	1
	d ₀ (mm)	12.5	15.0	20.0	23.0	12.5	15.0	20.0	23.0	15.0	20.0	23.0
	A ₀ (mm ²)	122.7	176.7	314.2	415.5	122.7	176.7	314.2	415.5	176.7	314.2	415.5
	Medium	Air				Saturated steam				Water		
3.0		216	260	555	807	169	203	433	630	6374	13075	18445
4.0		272	326	696	1013	211	253	540	786	7360	15098	21298
5.0		328	393	839	1221	252	303	647	942	8229	16880	23812
6.0		383	460	981	1428	294	353	753	1096	9014	18491	26085
7.0		438	526	1123	1634	335	402	859	1249	9736	19973	28175
8.0		495	594	1269	1846	376	452	964	1403	10409	21352	30120
9.0		551	661	1411	2053	417	501	1069	1555	11040	22647	31947
10.0		608	729	1556	2265	458	550	1174	1708	11637	23872	33676
12.0		719	863	1842	2679	540	648	1384	2013	12748	26150	36890
14.0		830	997	2127	3094	622	746	1592	2317	13770	28246	39846
16.0		942	1130	2412	3509	703	844	1802	2621	14720	30196	42597
18.0		1053	1264	2697	3924	785	942	2010	2924	15613	32028	45181
20.0		1176	1411	3011	4380	866	1040	2219	3228	16458	33760	47625
22.0		1288	1546	3298	4799	948	1137	2427	3531	17261	35408	49949
25.0		1457	1748	3730	5427	1070	1284	2739	3985	18401	37745	53246

Diagram 06801-3/4

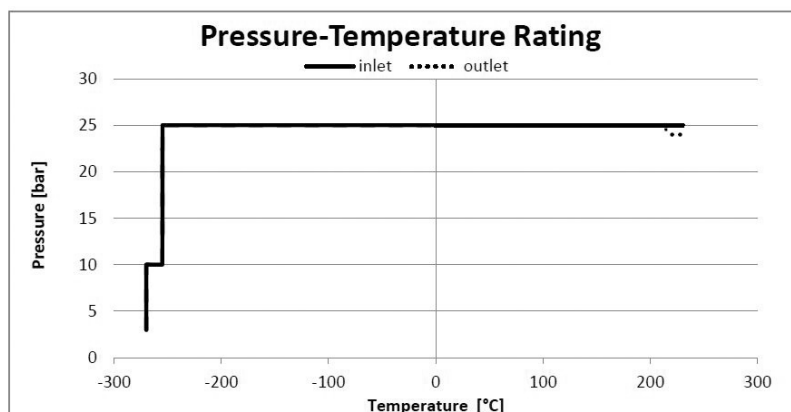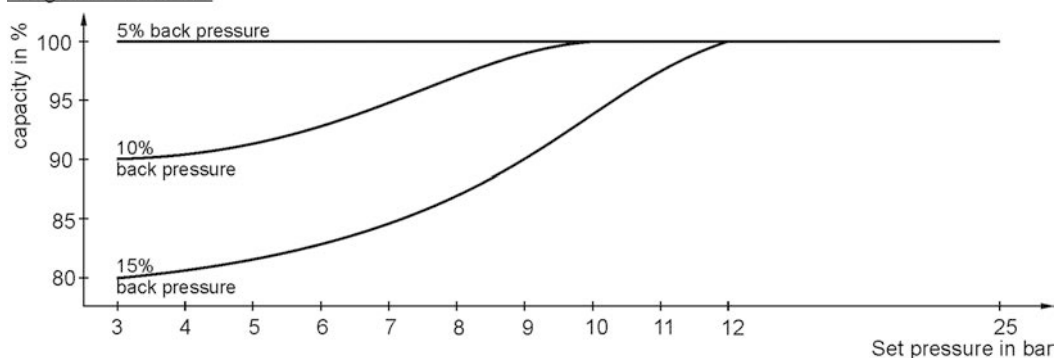

Safety Valves

Type 06806 with bellow seal



Stainless steel bellow sealed Safety Valves, angle type, PN40, type tested TÜV-SV.1105. S/G/L orifice $d_0 = 12.5$ mm TÜV-SV.1105. only S/G

Standard safety valve,
metal to metal seated, closed bonnet, with lifting device
"cleaned and degreased for oxygen service"

Part No. 06806.X.0000

Inlet: male thread type G (BSPP) acc. to ISO 228/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06806.X.2000

Inlet: male thread type R (BSPT) acc. to ISO 7/1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06806.X.5000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06806.X.6000

Inlet: male thread NPT acc. to ANSI B 1.20.1, Outlet: female thread NPT acc. to ANSI B 1.20.1

Applications:

Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for non-inflammable and inflammable vapours, gases and fluids.

Working temperature: -270°C / -454°F (3K) up to $+225^{\circ}\text{C}$ / $+437^{\circ}\text{F}$ (498K)

Maximum allowed back pressure: 15% of set pressure, pressure-temperature must be observed




Materials	DIN EN	ASME/ASTM
1 Inlet body	1.4571	A 276 Grade 316Ti
2 Outlet body	1.4308	A 351 CF8
3 Disc	1.4541	A 276 Grade 321
4 Bellow	1.4571	A 276 Grade 316Ti
5 Bellow stem	1.4571	A 276 Grade 316Ti
6 Stem	CW453K	B 103 UNS C52100
7 Bonnet	1.4301	A 276 Grade 304
8 Spring	1.4571	A 276 Grade 316Ti
9 Lifting cap	1.4301	A 276 Grade 304
10 Lever	1.4408	A 351 CF8M

Important:

For nominal size GW 3/4, $d_0 = 15.0$ mm the back pressure reduces the blow off performance of the safety valve (see diagram 06806-3/4).

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

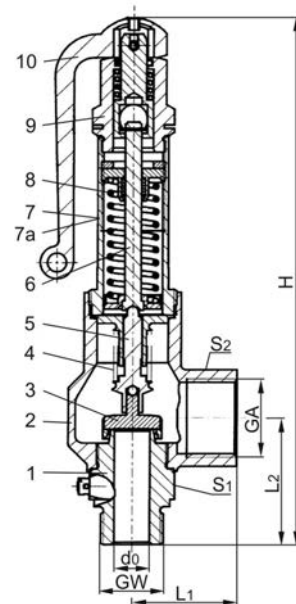

Type 06806	Technical data				
Nominal size	GW	1/2	3/4	1	1
Orifice	d_0	12.5	15	20	23
Dimension code	.X.	1204	1506	2010	2310
Set pressure range	bar	3.0-25.0	3.0-25.0	3.0-25.0	3.0-25.0
Outlet	GA	G 1	G 1	G 1-1/4	G 1-1/2
Height	H	221	225	250	305
Length	L_1	44	44	51	56
Length	L_2	52	54	63	65
Wrench size across flats	S_1	36	36	41	50
Wrench size across flats	S_2	41	41	50	55
Weight	ca. kg	1.23	1.25	1.95	3.10
Coeff. of discharge vapours, gases	α_w	0.60	0.50	0.60	0.66
Coeff. of discharge fluids	α_w	-	0.39	0.45	0.48

Dimensions in mm.

Safety Valves

Type 06806 with bellow seal



Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Water in kg/h

Saturated steam in kg/h

The capacity indicated below is for a fully opened valve.

Maximum allowed back pressure: 15% of set pressure.



For nominal size GW 3/4 the back pressure reduces the blow off performance of the safety valve (see diagram 06806-3/4).

d₀ - orifice

A₀ - flow area

Set pressure in bar (g)	GW	1/2	3/4	1	1	1/2	3/4	1	1	3/4	1	1
	d ₀ (mm)	12.5	15.0	20.0	23.0	12.5	15.0	20.0	23.0	15.0	20.0	23.0
	A ₀ (mm ²)	122.7	176.7	314.2	415.5	122.7	176.7	314.2	415.5	176.7	314.2	415.5
	Medium	Air				Saturated steam				Water		
3.0		216	260	555	807	169	203	433	630	6374	13075	18445
4.0		272	326	696	1013	211	253	540	786	7360	15098	21298
5.0		328	393	839	1221	252	303	647	942	8229	16880	23812
6.0		383	460	981	1428	294	353	753	1096	9014	18491	26085
7.0		438	526	1123	1634	335	402	859	1249	9736	19973	28175
8.0		495	594	1269	1846	376	452	964	1403	10409	21352	30120
9.0		551	661	1411	2053	417	501	1069	1555	11040	22647	31947
10.0		608	729	1556	2265	458	550	1174	1708	11637	23872	33676
12.0		719	863	1842	2679	540	648	1384	2013	12748	26150	36890
14.0		830	997	2127	3094	622	746	1592	2317	13770	28246	39846
16.0		942	1130	2412	3509	703	844	1802	2621	14720	30196	42597
18.0		1053	1264	2697	3924	785	942	2010	2924	15613	32028	45181
20.0		1176	1411	3011	4380	866	1040	2219	3228	16458	33760	47625
22.0		1288	1546	3298	4799	948	1137	2427	3531	17261	35408	49949
25.0		1457	1748	3730	5427	1070	1284	2739	3985	18401	37745	53246

Diagram 06806-3/4

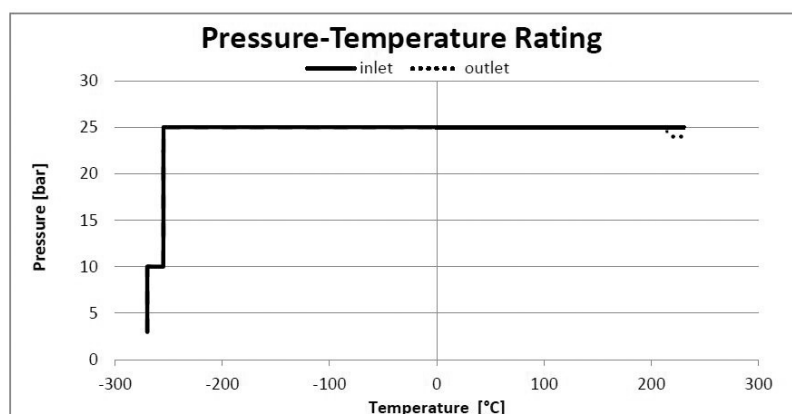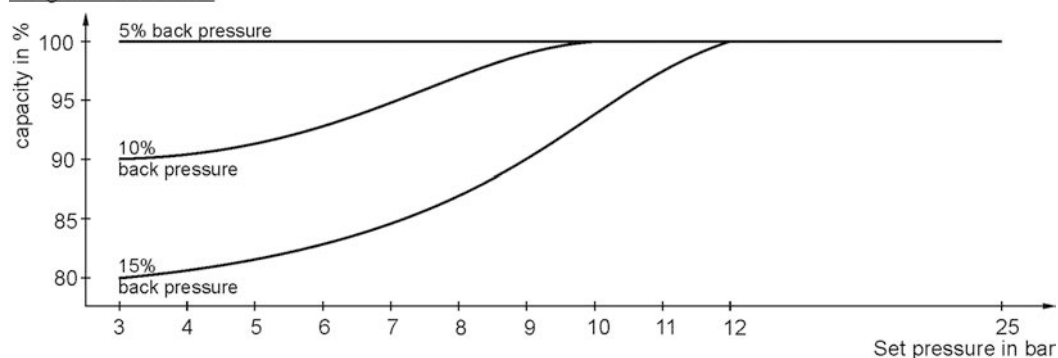

Safety Valves

Type 06800 with bellow seal



Stainless steel bellow sealed Safety Valves, angle type, PN40, type tested TÜV-SV.1105. S/G/L orifice $d_0 = 12.5$ mm TÜV-SV.1105. only S/G

Standard safety valve,
metal to metal seated, closed bonnet
"cleaned and degreased for oxygen service"

Part No. 06800.X.0000

Inlet: female thread type G (BSPP) acc. to ISO 228/1,
Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06800.X.5000

Inlet: female NPT acc. to ANSI B 1.20.1,
Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06800.X.6000

Inlet: female thread NPT acc. to ANSI B 1.20.1,
Outlet: female thread NPT acc. to ANSI B 1.20.1

Applications:

Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for non-inflammable and inflammable vapours, gases and fluids.

Working temperature: -270°C / -454°F (3K) up to $+225^{\circ}\text{C}$ / $+437^{\circ}\text{F}$ (498K)

Maximum allowed back pressure: 15% of set pressure, pressure-temperature must be observed




Materials	DIN EN	ASME/ASTM
1 Inlet body	1.4571	A 276 Grade 316Ti
2 Outlet body	1.4308	A 351 CF8
3 Disc	1.4541	A 276 Grade 321
4 Bellow	1.4571	A 276 Grade 316Ti
5 Bellow stem	1.4571	A 276 Grade 316Ti
6 Stem	CW453K	B 103 UNS C52100
7 Bonnet	1.4301	A 276 Grade 304
8 Spring	1.4571	A 276 Grade 316Ti
9 Cap	1.4301	A 276 Grade 304

Important:

For nominal size GW 1/2, $d_0 = 15.0$ mm the back pressure reduces the blow off performance of the safety valve (see diagram 06800-1/2, $d_0 = 15.0$).

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

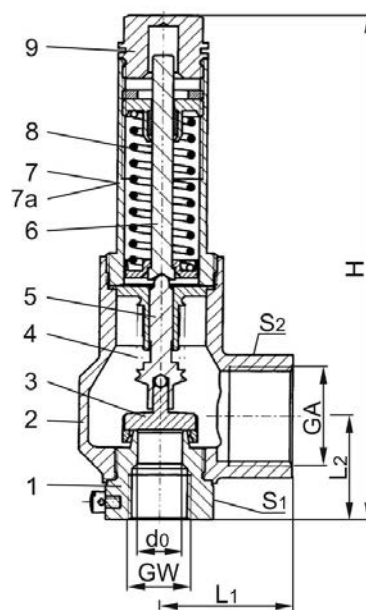

Type 06800	Technical data				
Nominal size	GW	1/2	1/2	3/4	1
Orifice	d_0	12.5	15	20	23
Dimension code	.X.	1204	1504	2006	2310
Set pressure range	bar	3.0-25.0	3.0-25.0	3.0-25.0	3.0-25.0
Outlet	GA	G 1	G 1	G 1-1/4	G 1-1/2
Height	H	170	170	198	245
Length	L_1	44	44	51	56
Length	L_2	35	35	48	58
Wrench size across flats	S_1	36	36	41	50
Wrench size across flats	S_2	41	41	50	55
Weight	ca. kg	1.0	0.97	1.65	2.50
Coeff. of discharge vapours, gases	α_w	0.60	0.50	0.60	0.66
Coeff. of discharge fluids	α_w	-	0.39	0.45	0.48

Dimensions in mm.

Safety Valves

Type 06800 with bellow seal



Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Water in kg/h

Saturated steam in kg/h

The capacity indicated below is for a fully opened valve.

Maximum allowed back pressure: 15% of set pressure.



For nominal size GW 1/2, d₀ = 15.0 mm the back pressure reduces the blow off performance of the safety valve (see diagram 06800-1/2, d₀ = 15.0)

d₀ - orifice

A₀ - flow area

Set pressure in bar (g)	GW	1/2	1/2	3/4	1	1/2	1/2	3/4	1	1/2	3/4	1
	d ₀ (mm)	12.5	15.0	20.0	23.0	12.5	15.0	20.0	23.0	15.0	20.0	23.0
	A ₀ (mm ²)	122.7	176.7	314.2	415.5	122.7	176.7	314.2	415.5	176.7	314.2	415.5
	Medium	Air				Saturated steam				Water		
3.0		216	260	555	807	169	203	433	630	6374	13075	18445
4.0		272	326	696	1013	211	253	540	786	7360	15098	21298
5.0		328	393	839	1221	252	303	647	942	8229	16880	23812
6.0		383	460	981	1428	294	353	753	1096	9014	18491	26085
7.0		438	526	1123	1634	335	402	859	1249	9736	19973	28175
8.0		495	594	1269	1846	376	452	964	1403	10409	21352	30120
9.0		551	661	1411	2053	417	501	1069	1555	11040	22647	31947
10.0		608	729	1556	2265	458	550	1174	1708	11637	23872	33676
12.0		719	863	1842	2679	540	648	1384	2013	12748	26150	36890
14.0		830	997	2127	3094	622	746	1592	2317	13770	28246	39846
16.0		942	1130	2412	3509	703	844	1802	2621	14720	30196	42597
18.0		1053	1264	2697	3924	785	942	2010	2924	15613	32028	45181
20.0		1176	1411	3011	4380	866	1040	2219	3228	16458	33760	47625
22.0		1288	1546	3298	4799	948	1137	2427	3531	17261	35408	49949
25.0		1457	1748	3730	5427	1070	1284	2739	3985	18401	37745	53246

Diagram 06800-1/2, d₀=15.0

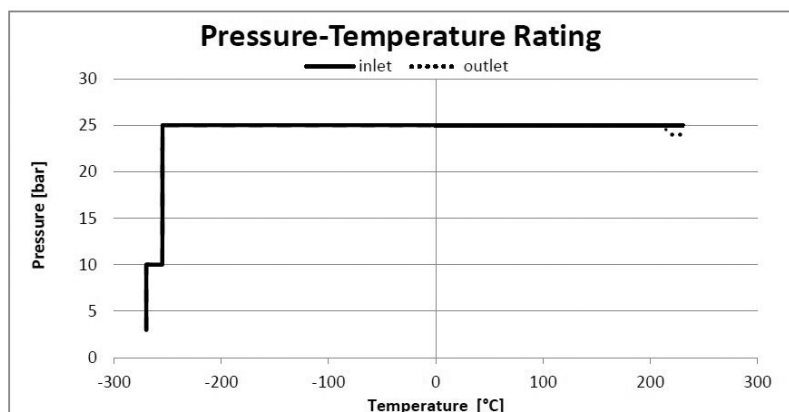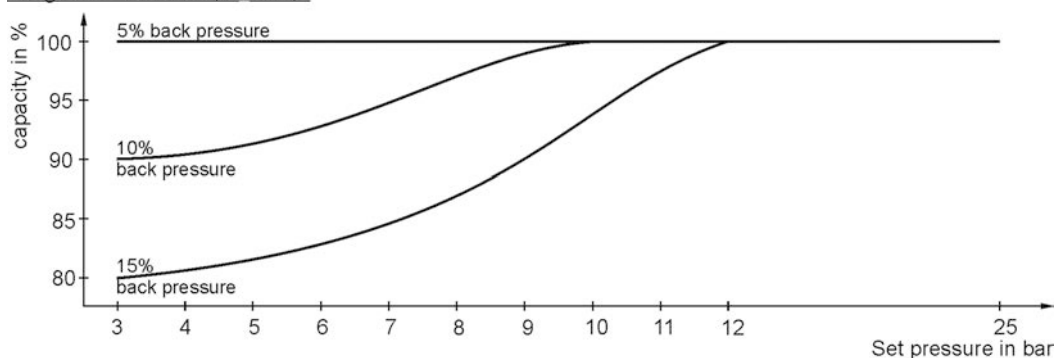

Safety Valves

Type 06805 with bellow seal



Stainless steel bellow sealed Safety Valves, angle type, PN40, type tested TÜV-SV.1105. S/G/L orifice $d_0 = 12.5$ mm TÜV-SV.1105. only S/G

Standard safety valve,
metal to metal seated, closed bonnet, with lifting device
"cleaned and degreased for oxygen service"

Part No. 06805.X.0000

Inlet: female thread type G (BSPP) acc. to ISO 228/1,
Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06805.X.5000

Inlet: female thread NPT acc. to ANSI B 1.20.1,
Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06805.X.6000

Inlet: female thread NPT acc. to ANSI B 1.20.1,
Outlet: female thread NPT acc. to ANSI B 1.20.1

Applications:

Provided as safety device for protection against excessive pressure in stationary and moveable gas cylinders and pressure vessels. Approved for non-inflammable and inflammable vapours, gases and fluids.

Working temperature: -270°C / -454°F (3K) up to $+225^{\circ}\text{C}$ / $+437^{\circ}\text{F}$ (498K)

Maximum allowed back pressure: 15% of set pressure, pressure-temperature must be observed




Materials	DIN EN	ASME/ASTM
1 Inlet body	1.4571	A 276 Grade 316Ti
2 Outlet body	1.4308	A 351 CF8
3 Disc	1.4541	A 276 Grade 321
4 Bellow	1.4571	A 276 Grade 316Ti
5 Bellow stem	1.4571	A 276 Grade 316Ti
6 Stem	CW453K	B 103 UNS C52100
7 Bonnet	1.4301	A 276 Grade 304
8 Spring	1.4571	A 276 Grade 316Ti
9 Lifting cap	1.4301	A 276 Grade 304
10 Lever	1.4408	A 351 CF8M

Important:

For nominal size GW 1/2, $d_0 = 15.0$ mm the back pressure reduces the blow off performance of the safety valve (see diagram 06805-1/2, $d_0 = 15.0$).

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

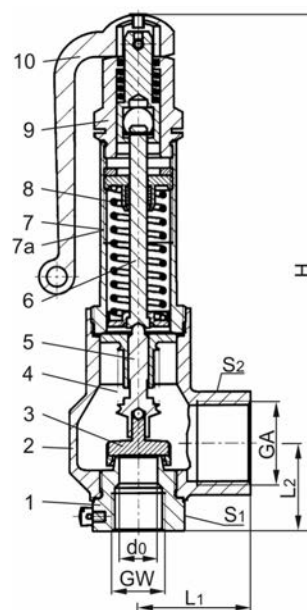

Type 6805	Technical data					
Nominal size	GW	1/2	1/2	3/4	3/4	1
Orifice	d_0	12.5	15	15	20	23
Dimension code	.X.	1204	1504	1506	2006	2310
Set pressure range	bar	3.0-25.0	3.0-25.0	3.0-25.0	3.0-25.0	3.0-25.0
Outlet	GA	G 1	G 1	G 1	G 1-1/4	G 1-1/2
Height	H	205	210	215	243	295
Length	L_1	44	44	44	51	56
Length	L_2	35	35	40	48	58
Wrench size across flats	S_1	36	36	41	41	50
Wrench size across flats	S_2	41	41	41	50	55
Weight	ca. kg	1.24	1.21	1.31	1.88	3.15
Coeff. of discharge vapours, gases	α_w	0.60	0.50	0.50	0.60	0.66
Coeff. of discharge fluids	α_w	-	0.39	0.39	0.45	0.48

Dimensions in mm.

Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

Air in m³/h at 0°C and 1013.25 mbar

Water in kg/h

Saturated steam in kg/h

The capacity indicated below is for a fully opened valve.

Maximum allowed back pressure: 15% of set pressure.



For nominal size GW 1/2, d₀ = 15.0 mm the back pressure reduces the blow off performance of the safety valve (see diagram 06805-1/2, d₀ = 15.0).

d₀ - orifice

A₀ - flow area

Set pressure in bar (g)	GW	1/2	1/2 & 3/4	3/4	1	1/2	1/2 & 3/4	3/4	1	1/2 & 3/4	3/4	1
	d ₀ (mm)	12.5	15.0	20.0	23.0	12.5	15.0	20.0	23.0	15.0	20.0	23.0
	A ₀ (mm ²)	122.7	176.7	314.2	415.5	122.7	176.7	314.2	415.5	176.7	314.2	415.5
	Medium	Air				Saturated steam				Water		
3.0		216	260	555	807	169	203	433	630	6374	13075	18445
4.0		272	326	696	1013	211	253	540	786	7360	15098	21298
5.0		328	393	839	1221	252	303	647	942	8229	16880	23812
6.0		383	460	981	1428	294	353	753	1096	9014	18491	26085
7.0		438	526	1123	1634	335	402	859	1249	9736	19973	28175
8.0		495	594	1269	1846	376	452	964	1403	10409	21352	30120
9.0		551	661	1411	2053	417	501	1069	1555	11040	22647	31947
10.0		608	729	1556	2265	458	550	1174	1708	11637	23872	33676
12.0		719	863	1842	2679	540	648	1384	2013	12748	26150	36890
14.0		830	997	2127	3094	622	746	1592	2317	13770	28246	39846
16.0		942	1130	2412	3509	703	844	1802	2621	14720	30196	42597
18.0		1053	1264	2697	3924	785	942	2010	2924	15613	32028	45181
20.0		1176	1411	3011	4380	866	1040	2219	3228	16458	33760	47625
22.0		1288	1546	3298	4799	948	1137	2427	3531	17261	35408	49949
25.0		1457	1748	3730	5427	1070	1284	2739	3985	18401	37745	53246

Diagram 06805-1/2, d₀=15.0

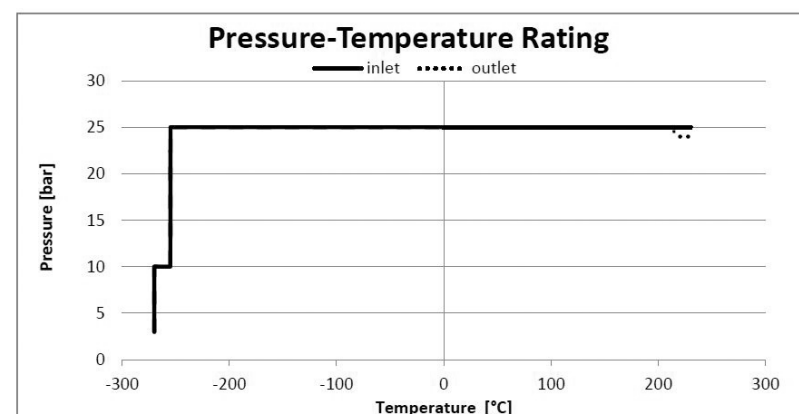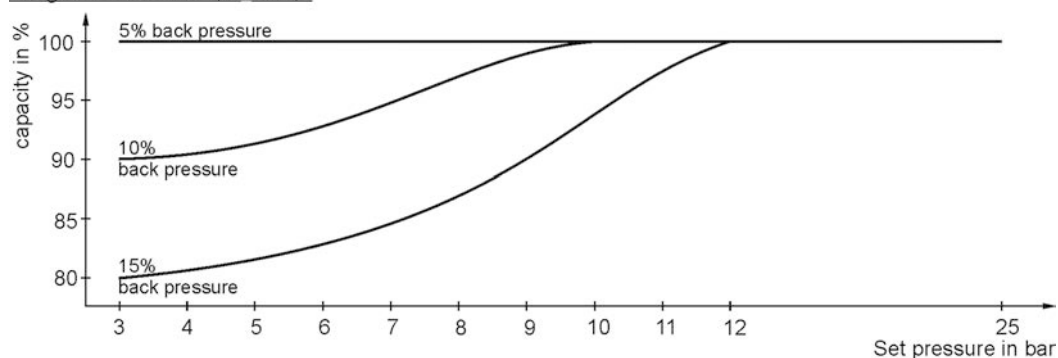

Safety Valves

Type 06810, Type 06815



Safety Valves, angle type, stainless steel, type tested, TÜV-SV.1130. S/G/L

Standard safety valve

metal to metal seated, "cleaned and degreased for oxygen service"

closed bonnet, gastight cap or lifting device

Inlet: male thread type G (BSPP) acc. to ISO 228/1

Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06810.X.000000M (Pmax 16.0 bar)

Part No. 06810.X.000000H (Pmax 550.0 bar) stellited version
with gastight cap

Part No. 06815.X.000000M (Pmax 16.0 bar)

Part No. 06815.X.000000H (Pmax 300.0 bar) stellited version
with lifting device

Available options - on request only:

· Flange-, NPT- or Tri-Clamp connection for in- and outlet



Applications:

Provided as safety device for protection against excessive pressure in gas cylinders and pressure vessels. Approved for gases, vapours and liquids. Working temperature: -270°C / -454°F (3K) up to +400°C / +752°F (673K)

Pressure-temperature must be observed, suitable for horizontal installation from 20 bar up to 300 bar

Materials	DIN EN	ASME/ASTM
1 Outlet body	1.4408	A 351 CF 8M
2 Inlet body	1.4571	A 276 Grade 316Ti
3 Disc	1.4571	A 276 Grade 316Ti
5 Stem	1.4404	A 276 Grade 316L
6 Bonnet	1.4408	A 351 CF8M
7 Spring	1.4571	A 313 Grade 316Ti
8 Cap	1.4408	A 351 CF8M
9 Lifting cap	1.4408	A 351 CF8M
10 Lever	1.4301	A 276 Grade 304
Spare Parts		
2 Inlet body	1.4571	316Ti
3 Disc	1.4571	316Ti
3.1 Split pin	1.4310	301
11 Gasket	Graphite	
12 Gasket	PTFE	
13 Gasket	PTFE	
14 O-ring	FPM (VITON)	


Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 06810, 06815	Technical data							
Nominal size	GW	1/2	1/2	3/4	3/4	1/2	1/2	3/4
Orifice	d ₀	6.0	6.0	6.0	6.0	10.0	10.0	10.0
Dimension code	.X.	0622	0623	0632	0633	1022	1023	1033
Set pressure range	bar	30-300	30-300	30-550	30-550	0.5-180	0.5-180	0.5-180
Outlet	GA	1/2	3/4	1/2	3/4	1/2	3/4	3/4
Height	H ₁	245	245	247	247	245	245	245
Length	L ₁	44	44	44	44	44	44	44
Length	L ₂	32	32	32	32	32	32	32
Length	A ₁	14	14	16	16	14	14	16
Weight 06810	ca. kg	1.8	1.8	1.8	1.8	1.8	1.8	1.8
Weight 06815	ca. kg	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Coeff. of discharge gases, vapours	α _w	0.52	0.52	0.52	0.52	0.5	0.5	0.5
Coeff. of discharge fluids	α _w	0.42	0.42	0.42	0.42	0.5	0.5	0.5

Dimensions in mm.

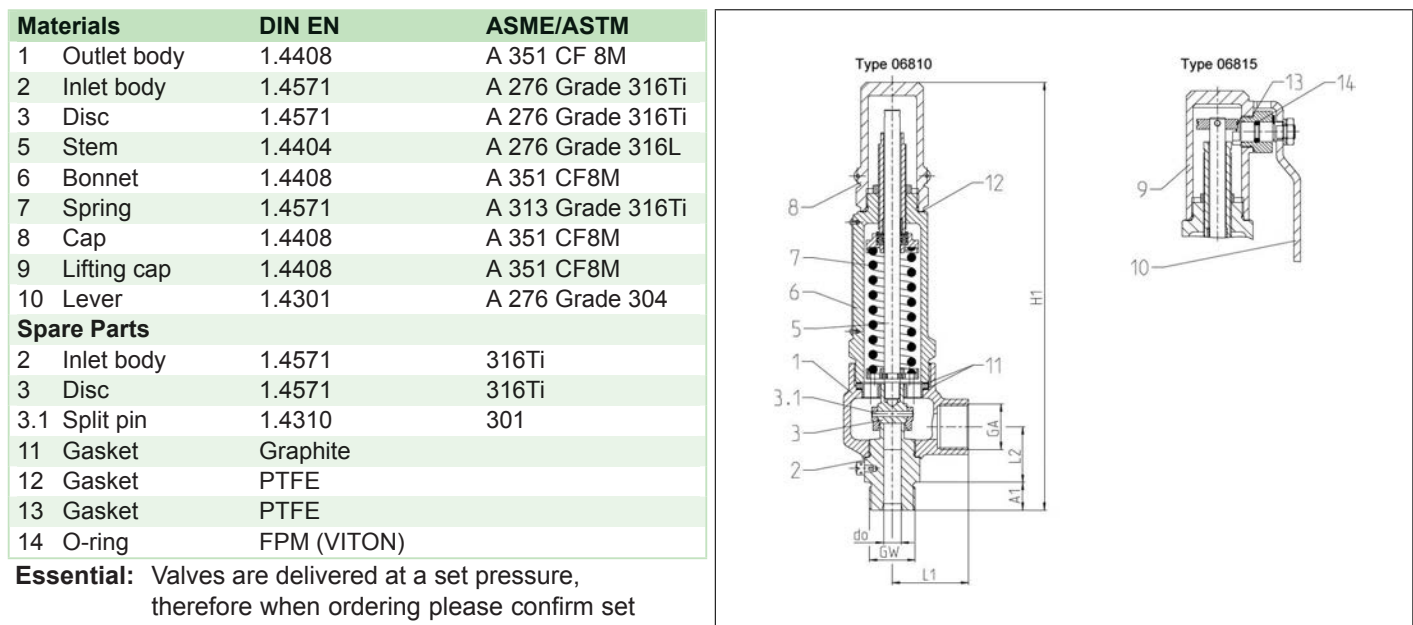

Safety Valves

Type 06810, Type 06815



Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

A = Saturated steam in kg/h

B = Air in m³/h at 0°C and 1013,25 mbar

C = Water in kg/h at 20°C

The capacity indicated below is for a fully opened valve.

d₀ - orifice


A₀ - flow area

Set pressure in bar (g)	GW	1/2			3/4		
	d ₀ (mm)	6.0			6.0		
	A ₀ (mm ²)	28.27			28.27		
	Medium	A	B	C	A	B	C
30.0		254	350	3473	254	350	3473
40.0		336	468	4011	336	468	4011
60.0		503	708	4912	503	708	4912
80.0		670	953	5672	670	953	5672
100.0		845	1203	6341	845	1203	6341
120.0		1032	1451	6947	1032	1451	6947
140.0		1230	1703	7503	1230	1703	7503
160.0		1437	1952	8021	1437	1952	8021
180.0		1688	2194	8508	1688	2194	8508
200.0		2215	2429	8968	2215	2429	8968
220.0		-	2659	9406	-	2659	9406
240.0		-	2893	9824	-	2893	9824
260.0		-	3133	10225	-	3133	10225
280.0		-	3374	10611	-	3374	10611
300.0		-	3614	10983	-	3614	10983
320.0		-	-	-	-	3854	11344
340.0		-	-	-	-	4094	11693
360.0		-	-	-	-	4334	12032
380.0		-	-	-	-	4575	12361
400.0		-	-	-	-	4815	12683
420.0		-	-	-	-	5055	12996
440.0		-	-	-	-	5295	13302
460.0		-	-	-	-	5535	13601
480.0		-	-	-	-	5776	13893
500.0		-	-	-	-	6016	14180
520.0		-	-	-	-	6256	14460
550.0		-	-	-	-	6616	14872

Pressure-Temperature Rating

Maximum allowable working pressure
Safety Valve Type 068XX.06

— all. pressure (inlet) - - all. pressure (outlet)

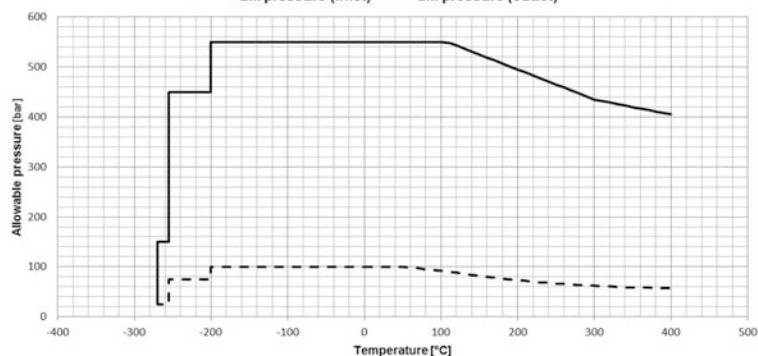

Safety Valves

Type 06810, Type 06815



Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

A = Saturated steam in kg/h

B = Air in m³/h at 0°C and 1013,25 mbar

C = Water in kg/h at 20°C

The capacity indicated below is for a fully opened valve.


d_0 - orifice

A_0 - flow area

Set pressure in bar (g)	GW	1/2 & 3/4		
	d_0 (mm)	10.0		
	A_0 (mm ²)	78.5		
	Medium	A	B	C
0.5		32	39	1548
1.0		44	55	2096
2.0		67	85	2965
3.0		90	115	3632
4.0		112	145	4193
5.0		134	174	4688
6.0		156	204	5136
7.0		178	234	5548
8.0		200	264	5931
9.0		222	294	6290
10.0		244	324	6631
12.0		288	383	7264
14.0		331	443	7846
16.0		375	502	8387
18.0		418	561	8896
20.0		462	627	9377
25.0		570	777	10484
30.0		680	935	11485
35.0		788	1087	12405
40.0		897	1249	13262
45.0		1008	1401	14066
50.0		1118	1567	14827
60.0		1341	1889	16243
70.0		1562	2216	17544
80.0		1788	2545	18755
90.0		2013	2878	19893
100.0		2244	3212	20969
120.0		2723	3876	22971
130.0		2972	4197	23909
140.0		-	4548	24811
160.0		-	5213	26524
180.0		-	5861	28133

Pressure-Temperature Rating

Allowable operating pressure at the valve inlet and outlet
Safety valve type 06810.10 and 06815.10

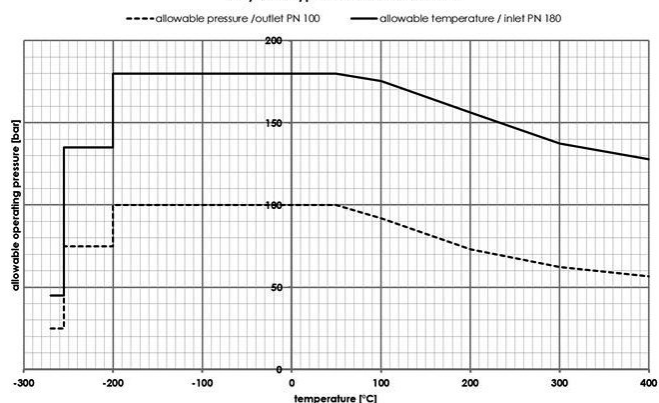

Safety Valves

Type 06810, Type 06815 - Sealing plate



Safety Valves, angle type, stainless steel, type tested, TÜV-SV.1130. S/G/L

Standard safety valve

with soft valve seal, "cleaned and degreased"

closed bonnet, gastight cap or lifting device

Inlet: male thread type G (BSPP) acc. to ISO 228/1

Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06810.X.000001L (Pmax 150.0 bar)

with gastight cap

Part No. 06815.X.000001L (Pmax 150.0 bar)

with lifting device

Available options - on request only:

· Flange-, NPT- or Tri-Clamp connection for in- and outlet




Applications:

Provided as safety device for protection against excessive pressure in gas cylinders and pressure vessels. Approved for gases, vapours and liquids. Working temperature: -270°C / -454°F (3K) up to +300°C / +572°F (573K)

Pressure-temperature must be observed, suitable for horizontal installation from 20 bar

Materials	DIN EN	ASME/ASTM
1 Outlet body	1.4408	A 351 CF8M
2 Inlet body	1.4571	A 276 Grade 316Ti
3 Disc	1.4571	A 276 Grade 316Ti
4 Sealing plate	VESPEL	
5 Stem	1.4404	A 276 Grade 316L
6 Bonnet	1.4408	A 351 CF8M
7 Spring	1.4571	A 313 Grade 316Ti
8 Cap	1.4408	A 351 CF8M
9 Lifting cap	1.4408	A 351 CF8M
10 Lever	1.4301	A 276 Grade 304
Spare Parts		
2 Inlet body	1.4571	316Ti
3.1 Split pin	1.4571	316Ti
4 Sealing plate	VESPEL	
11 Gasket	1.4404 Graphite	316L Graphite
12 Gasket	PTFE	
13 Gasket	PTFE	
14 O-ring	FPM (VITON)	

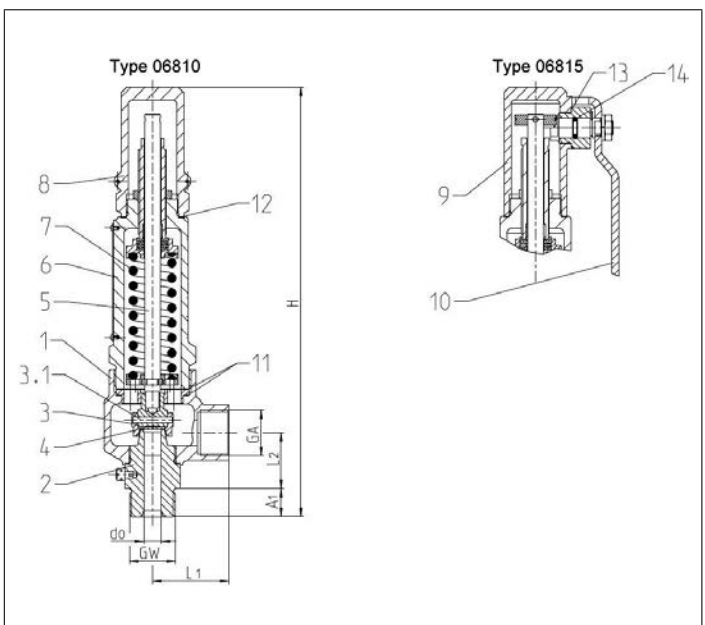

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).




Type 06810, 06815 Technical Data				
D ₀	[mm]	10		
Inlet	GW	1/2	1/2	3/4
Outlet	GW	1/2	3/4	3/4
Dimension code	.X.	1022	1023	1033
Height	H	245.0	245.0	245.0
Length	L1	44.0	44.0	44.0
Length	L2	32.0	32.0	32.0
Length	A1	14.0	14.0	16.0
Weight 06810	ca. kg	1.8	1.8	1.8
Weight 06815	ca. kg	2.0	2.0	2.0
Coeff. of discharge	α _w S/G/L	0.50	0.50	0.50
Min. set pressure	bar-g	1.5	1.5	1.5
Max. set pressure	bar-g	150.0	150.0	150.0
Min. temperature	°C	-270	-270	-270
Max. temperature	°C	+300	+300	+300

Dimensions in mm.

Pressure-Temperature Rating

Maximum allowable set pressure safety valve Type 0681X

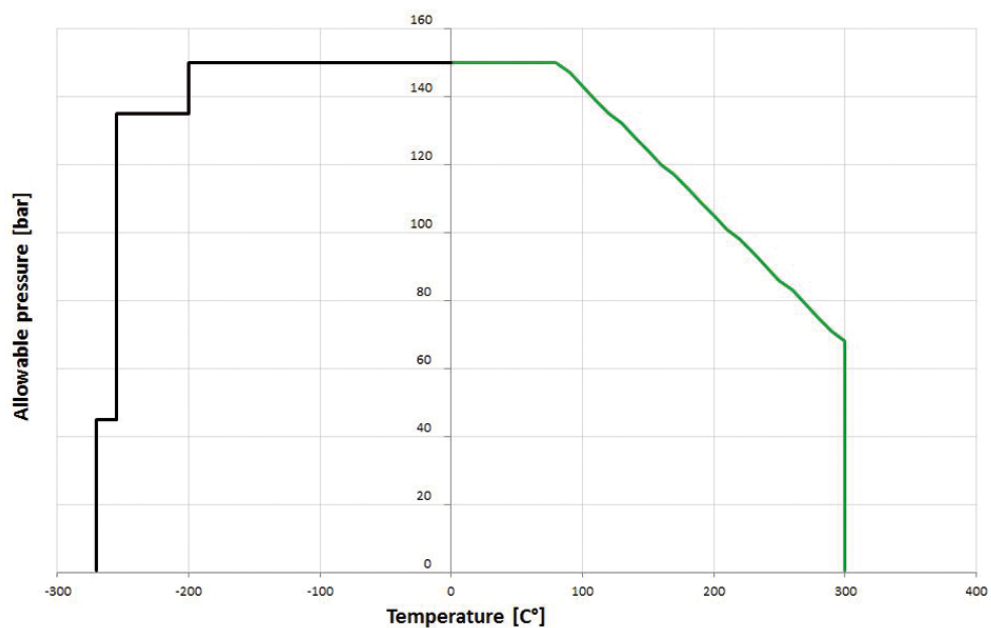

Safety Valves

Type 06810, Type 06815 - Sealing plate



Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

A = Saturated steam in kg/h

B = Air in m³/h at 0°C and 1013,25 mbar

C = Water in kg/h at 20°C

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Set pressure in bar (g)	GW	1/2, 3/4 & 1		
	d ₀ (mm)	10.0		
	A ₀ (mm ²)	78.5		
	Medium	A	B	C
0.2		-	-	-
0.5		-	39	1548
1.0		-	55	2096
2.0		-	85	2965
3.0		-	115	3632
4.0		-	145	4193
5.0		-	174	4688
6.0		-	204	5136
7.0		-	234	5548
8.0		-	264	5931
9.0		-	294	6290
10.0		-	324	6631
15.0		-	472	6947
20.0		-	627	9377
30.0		-	935	11485
40.0		-	1249	13262
50.0		-	1567	14827
60.0		-	1889	16243
65.0		-	2045	16906
70.0		-	2216	-
80.0		-	2545	-
90.0		-	2878	-
100.0		-	3212	-
110.0		-	3544	-
120.0		-	3876	-
140.0		-	4548	-
150.0		-	4871	-

Safety Valves

Type 06810, Type 06815 - O-ring



Safety Valves, angle type, stainless steel, type tested, TÜV-SV.1130. S/G/L

Standard safety valve

with O-ring valve seal, "cleaned and degreased"

closed bonnet, gastight cap or lifting device

Inlet: male thread type G (BSPP) acc. to ISO 228/1

Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06810.X.000002N (P_{max} 15.99 bar)

with NBR O-ring valve seal

Part No. 06810.X.000002F (P_{min} 16.00 bar, P_{max} 180.0 bar)

with FKM O-ring valve seal

Available options - on request only:


· Flange-, NPT- or Tri-Clamp connection for in- and outlet



Applications:

Provided as safety device for protection against excessive pressure in gas cylinders and pressure vessels. Approved for gases and liquids. Working temperature: 0°C / 32°F (273K) up to 70°C / 158°F (343K), suitable for horizontal installation from 20 bar.

Materials	DIN EN	ASME/ASTM
1 Outlet body	1.4408	A 351 CF8M
2 Inlet body	1.4571	A 276 Grade 316Ti
3 Disc	1.4571	A 276 Grade 316Ti
4 O-ring	NBR or FKM	
5 Stem	1.4404	A 276 Grade 316L
6 Bonnet	1.4408	A 351 CF8M
7 Spring	1.4571	A 313 Grade 316Ti
8 Cap	1.4408	A 351 CF8M
9 Lifting cap	1.4408	A 351 CF8M
10 Lever	1.4301	A 276 Grade 304
Spare Parts		
3 Complete disc	1.4571+NBR or FKM	316Ti + NBR or FKM
4 O-ring + screw	NBR or FKM	
11 Gasket	1.4404 Graphite	316L Graphite
12 Gasket	PTFE	
13 Gasket	PTFE	
14 O-ring	FPM (VITON)	

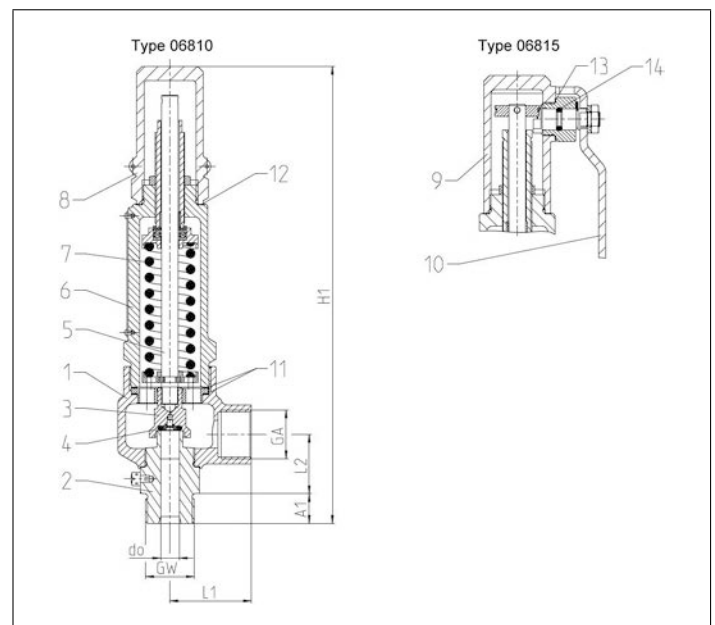

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 06810, 06815	Technical Data			
D ₀	[mm]	10		
Inlet	GW	1/2	1/2	3/4
Outlet	GW	1/2	3/4	3/4
Dimension code	.X.	1022	1023	1033
Height	H1	245.0	245.0	245.0
Length	L1	44.0	44.0	44.0
Length	L2	32.0	32.0	32.0
Length	A1	14.0	14.0	16.0
Weight 06810	ca. kg	1.8	1.8	1.8
Weight 06815	ca. kg	2.0	2.0	2.0
Coeff. of discharge	α _w S/G/L	0.50	0.50	0.50
Min. set pressure	bar-g	3.0	3.0	3.0
Max. set pressure	bar-g	180.0	180.0	180.0

Dimensions in mm.

Safety Valves

Type 06810, Type 06815 - O-ring



Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

A = Saturated steam in kg/h

B = Air in m³/h at 0°C and 1013,25 mbar

C = Water in kg/h at 20°C

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Set pressure in bar (g)	GW	1/2, 3/4 & 1		
	d ₀ (mm)	10.0		
	A ₀ (mm ²)	78.5		
	Medium	A	B	C
3.0	-	116	3632	
4.0	-	145	4194	
5.0	-	175	4689	
6.0	-	205	5137	
7.0	-	234	5548	
8.0	-	264	5931	
9.0	-	294	6291	
10.0	-	324	6631	
12.0	-	384	7264	
14.0	-	443	7846	
16.0	-	503	8388	
18.0	-	562	8897	
20.0	-	627	9378	
25.0	-	777	10485	
30.0	-	936	11486	
35.0	-	1087	12406	
40.0	-	1249	13262	
45.0	-	1402	14067	
50.0	-	1568	14828	
60.0	-	1890	16243	
70.0	-	2216	17545	
80.0	-	2546	18756	
90.0	-	2878	19894	
100.0	-	3212	20970	
110.0	-	3531	21993	
120.0	-	3877	22971	
130.0	-	4197	23909	
140.0	-	4549	24812	
150.0	-	4872	25683	
160.0	-	5213	26525	
170.0	-	5537	27341	
180.0	-	5861	28134	

Safety Valves

Type 06820



Safety Valves, angle type, stainless steel, type tested, TÜV-SV.1130. S/G/L

Standard safety valve

metal to metal seated, "cleaned and degreased for oxygen service"

closed bonnet, gastight cap

Inlet: male thread type G (BSPP) acc. to ISO 228/1

Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06820.X.000000H (Pmax 550.0 bar) stellited version

with gastight cap

Available options - on request only:

- Flange- or NPT- connection for in- and outlet
- Special materials such as Monel, Hastelloy or Duplex for medium wetted parts




Applications:

Provided as safety device for protection against excessive pressure in gas cylinders and pressure vessels. Approved for gases, vapours and liquids. Working temperature: -270°C / -454°F (3K) up to +400°C / +752°F (673K)

Pressure-temperature must be observed, suitable for horizontal installation up to 300 bar

Materials	DIN EN	ASME/ASTM
1 Outlet body	1.4404	A 276 Grade 316L
2 Inlet body	1.4571	A 276 Grade 316Ti
3 Disc	1.4571	A 276 Grade 316Ti
5 Stem	1.4404	A 276 Grade 316L
6 Bonnet	1.4404	A 276 Grade 316L
7 Spring	1.4571	A 313 Grade 316Ti
8 Cap	1.4404	A 276 Grade 316L
Spare Parts		
2 Inlet body	1.4571	316Ti
3 Disc	1.4571	316Ti
3.1 Split pin	1.4310	301
11 Gasket	Graphite	
12 Gasket	Graphite	

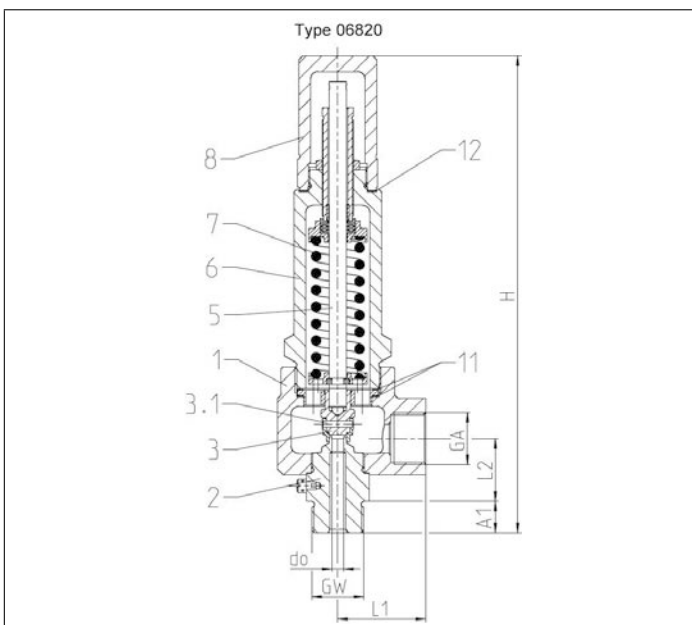

Essential: Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 06820	Technical data	
Nominal size	GW	3/4
Orifice	d ₀	6.0
Dimension code	.X.	0633
Set pressure range	bar	30-550
Outlet	GA	3/4
Height	H ₁	247
Length	L ₁	45
Length	L ₂	29
Length	A ₁	16
Weight 06820	ca. kg	2.9
Coeff. of discharge gases, vapours	α _w	0.52
Coeff. of discharge fluids	α _w	0.42

Dimensions in mm.

Safety Valves

Type 06820



Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

A = Saturated steam in kg/h

B = Air in m³/h at 0°C and 1013,25 mbar

C = Water in kg/h at 20°C

The capacity indicated below is for a fully opened valve.


d₀ - orifice

A₀ - flow area

Set pressure in bar (g)	GW	3/4		
	d ₀ (mm)	6.0		
	A ₀ (mm ²)	28.27		
	Medium	A	B	C
30.0		254	350	3473
40.0		336	468	4011
60.0		503	708	4912
80.0		670	953	5672
100.0		845	1203	6341
120.0		1032	1451	6947
140.0		1230	1703	7503
160.0		1437	1952	8021
180.0		1688	2194	8508
200.0		2215	2429	8968
220.0		-	2659	9406
240.0		-	2893	9824
260.0		-	3133	10225
280.0		-	3374	10611
300.0		-	3614	10983
320.0		-	3854	11344
340.0		-	4094	11693
360.0		-	4334	12032
380.0		-	4575	12361
400.0		-	4815	12683
420.0		-	5055	12996
440.0		-	5295	13302
460.0		-	5535	13601
480.0		-	5776	13893
500.0		-	6016	14180
520.0		-	6256	14460
550.0		-	6616	14872

Pressure-Temperature Rating

Maximum allowable set pressure safety valve type 06820

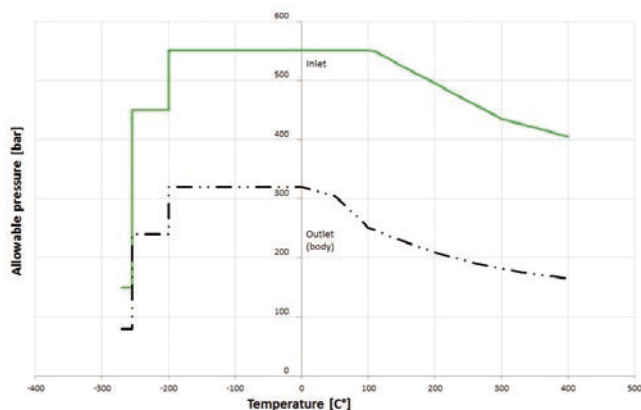

Safety Valves

Type 06850, Type 06855



Safety Valves, angle type, stainless steel, type tested, TÜV-SV.1130. S/G/L

Standard safety valve

metal to metal seated, "cleaned and degreased for oxygen service"

closed bonnet, gastight cap or lifting device

Inlet: male thread type G (BSPP) acc. to ISO 228/1

Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06850.X.000000M (Pmax 20.0 bar)

Part No. 06850.X.000000H (Pmax 250.0 bar) stellited version
with gastight cap

Part No. 06855.X.000000M (Pmax 20.0 bar)

Part No. 06855.X.000000H (Pmax 250.0 bar) stellited version
with lifting device

Available options - on request only:

· Flange-, NPT- or Tri-Clamp connection for in- and outlet




Applications:

Provided as safety device for protection against excessive pressure in gas cylinders and pressure vessels. Approved for gases, vapours and liquids. Working temperature: -270°C / -454°F (3K) up to +400°C / +752°F (673K)

Pressure-temperature must be observed, suitable for horizontal installation from 20 bar

Materials	DIN EN	ASME/ASTM
1 Outlet body	1.4408	A 351 CF8M
2 Inlet body	1.4571	A 276 Grade 316Ti
3 Disc	1.4571	A 276 Grade 316Ti
5 Stem	1.4404	A 276 Grade 316L
6 Bonnet	1.4408	A 351 CF8M
7 Spring	1.4571	A 313 Grade 316Ti
8 Cap	1.4408	A 351 CF8M
9 Lifting cap	1.4408	A 351 CF8M
10 Lever	1.4301	A 276 Grade 304
Spare Parts		
2 Inlet body	1.4571	316Ti
3 Disc	1.4571	316Ti
3.1 Split pin	1.4310	301
11 Gasket	1.4404 Graphite	316L Graphite
12 Gasket	PTFE	
13 Gasket	PTFE	
14 O-ring	FPM (VITON)	

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

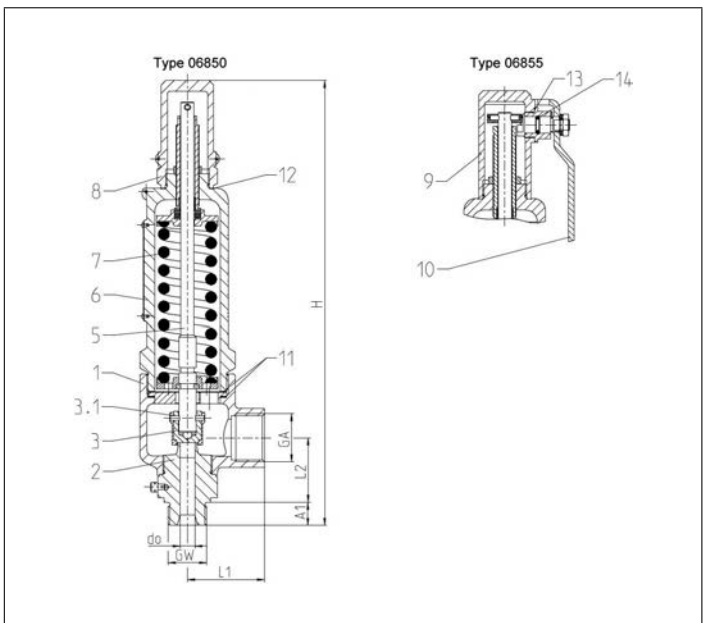

Type 06850, 06855	Technical data									
Orifice	[mm]	10			14					
Inlet	GW	1/2	3/4	1	3/4	3/4	3/4	1	1	1
Outlet	GW	1	1	1	1	1-1/4	1-1/2	1	1-1/4	1-1/2
Dimension code	.X.	1024	1034	1044	1434	1435	1436	1444	1445	1446
Height	H	305.0	307.0	309.0	310.5	310.5	310.5	312.5	312.5	312.5
Length	L1	53.0	53.0	53.0	55.0	55.0	55.0	55.0	55.0	55.0
Length	L2	44.5	44.5	44.5	48.2	48.2	48.2	48.2	48.2	48.2
Length	A1	14.0	16.0	18.0	16.0	16.0	16.0	18.0	18.0	18.0
Weight 06850	ca. kg	3.2	3.2	3.2	3.4	3.4	3.4	3.4	3.4	3.4
Weight 06855	ca. kg	3.4	3.4	3.4	3.6	3.6	3.6	3.6	3.6	3.6
coefficient of discharge	α_w S/G	0.84	0.84	0.84	0.70	0.70	0.70	0.70	0.70	0.70
coefficient of discharge	α_w L	0.68	0.68	0.68	*	*	*	*	*	*
Min. set pressure	bar-g	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Max. set pressure	bar-g	250.0	250.0	250.0	200.0	200.0	200.0	200.0	200.0	200.0
Min. temperature	°C	-270	-270	-270	-270	-270	-270	-270	-270	-270
Max. temperature	°C	+400	+400	+400	+400	+400	+400	+400	+400	+400


Dimensions in mm. * 0.20-11.50 bar=0.50 / 11.51-74.99 bar=0.49 / 75.00-200.00 bar=0.46

Type 06850, 06855		Technical data					
Orifice	[mm]	18					
Inlet	GW	1	1	1-1/4	1-1/4	1-1/2	1-1/2
Outlet	GW	1-1/2	2	1-1/2	2	1-1/2	2
Dimension code	.X.	1846	1847	1856	1857	1866	1867
Height	H	304.0	304.0	304.0	304.0	306.0	306.0
Length	L1	60.0	63.0	60.0	63.0	60.0	63.0
Length	L2	49.0	53.0	49.0	53.0	49.0	53.0
Length	A1	18.0	18.0	20.0	20.0	22.0	22.0
Weight 06850	ca. kg	3.9	4.1	3.9	4.1	4.0	4.2
Weight 06855	ca. kg	4.1	4.3	4.1	4.3	4.2	4.4
coefficient of discharge	$\alpha_w S/G$	0.76	0.76	0.76	0.76	0.76	0.76
coefficient of discharge	$\alpha_w L$	0.50	0.50	0.50	0.50	0.50	0.50
Min. set pressure	bar-g	0.5	0.5	0.5	0.5	0.5	0.5
Max. set pressure	bar-g	110.0	110.0	110.0	110.0	110.0	110.0
Min. temperature	°C	-270	-270	-270	-270	-270	-270
Max. temperature	°C	+400	+400	+400	+400	+400	+400

Dimensions in mm.

Pressure-Temperature Rating

Maximum allowable set pressure safety valve Type 0685X

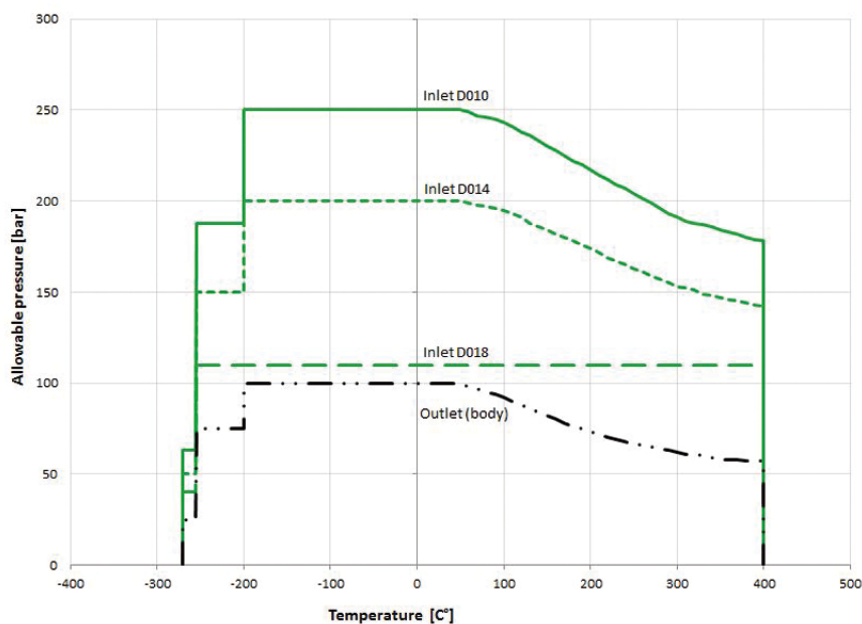

Safety Valves

Type 06850, Type 06855



Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

A = Saturated steam in kg/h

B = Air in m³/h at 0°C and 1013,25 mbar

C = Water in kg/h at 20°C

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Set pressure in bar (g)	GW	1/2, 3/4 & 1			3/4 & 1			1, 1-1/4 & 1-1/2		
	d ₀ (mm)	10.0			14.0			18.0		
	A ₀ (mm ²)	78.5			153.9			254.0		
	Medium	A	B	C	A	B	C	A	B	C
0.5		47	56	2075	81	96	3035	127	152	5018
1.0		70	88	2852	116	146	4110	191	242	6794
2.0		112	143	4033	185	236	5813	320	407	9608
3.0		152	194	4940	248	317	7119	444	570	11768
4.0		189	244	5704	309	398	8220	555	715	13588
5.0		227	294	6377	370	480	9190	665	862	15192
6.0		264	344	6986	431	561	10068	774	1007	16642
7.0		301	393	7545	492	642	10874	882	1153	17976
8.0		338	444	8066	552	726	11625	990	1302	19217
9.0		375	494	8556	612	807	12330	1098	1448	20383
10.0		411	545	9018	671	890	12997	1205	1598	21485
15.0		593	794	11045	968	1298	15600	1738	2329	26314
20.0		774	1054	12754	1264	1721	18013	2269	3089	30385
30.0		1140	1572	15620	1861	2568	22062	3341	4609	37213
40.0		1510	2099	18037	2466	3428	25475	4425	6152	42970
50.0		1882	2634	20166	3075	4302	28481	5518	7720	48042
60.0		2256	3175	22091	3685	5186	31200	6614	9308	52628
70.0		2631	3723	23861	4297	6081	33700	7712	10914	56845
80.0		3009	4277	25508	4914	6985	33821	8819	12537	60769
90.0		3394	4835	27055	5543	7898	35872	9949	14174	64456
100.0		3791	5397	28519	6191	8814	37813	11112	15820	67942
110.0		4202	5931	29911	6864	9688	39658	12319	17387	71258
120.0		4629	6513	31241	7561	10637	41422	-	-	-
140.0		5520	7642	33744	9016	12482	44741	-	-	-
160.0		6448	8758	36074	-	14305	47830	-	-	-
180.0		7575	9847	38262	-	16083	50731	-	-	-
200.0		-	10898	40332	-	17801	53475	-	-	-
220.0		-	11931	42300	-	-	-	-	-	-
240.0		-	12983	44181	-	-	-	-	-	-
250.0		-	13522	45092	-	-	-	-	-	-

Safety Valves

Type 06850, Type 06855 - Sealing plate



Safety Valves, angle type, stainless steel, type tested, TÜV-SV.1130. G/L

standard safety valve

with soft valve seal, "cleaned and degreased"

closed bonnet, gastight cap or lifting device

Inlet: male thread type G (BSPP) acc. to ISO 228/1

Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06850.X.000001L (Pmax 150.0 bar)

with gastight cap

Part No. 06855.X.000001L (Pmax 150.0 bar)

with lifting device

Available options - on request only:

· Flange-, NPT- or Tri-Clamp connection for in- and outlet




Applications:

Provided as safety device for protection against excessive pressure in gas cylinders and pressure vessels. Approved for gases and liquids. Working temperature: -270°C / -454°F (3K) up to +300°C / +572°F (573K)

Pressure-temperature must be observed, suitable for horizontal installation from 20 bar

Materials	DIN EN	ASME/ASTM
1 Outlet body	1.4408	A 351 CF8M
2 Inlet body	1.4571	A 276 Grade 316Ti
3 Disc	1.4571	A 276 Grade 316Ti
4 Sealing plate	VESPEL	
5 Stem	1.4404	A 276 Grade 316L
6 Bonnet	1.4408	A 351 CF8M
7 Spring	1.4571	A 313 Grade 316Ti
8 Cap	1.4408	A 351 CF8M
9 Lifting cap	1.4408	A 351 CF8M
10 Lever	1.4301	A 276 Grade 304
Spare Parts		
2 Inlet body	1.4571	316Ti
3.1 Split pin	1.4571	316Ti
4 Sealing plate	VESPEL	
11 Gasket	1.4404 Graphite	316L Graphite
12 Gasket	PTFE	
13 Gasket	PTFE	
14 O-ring	FPM (VITON)	

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

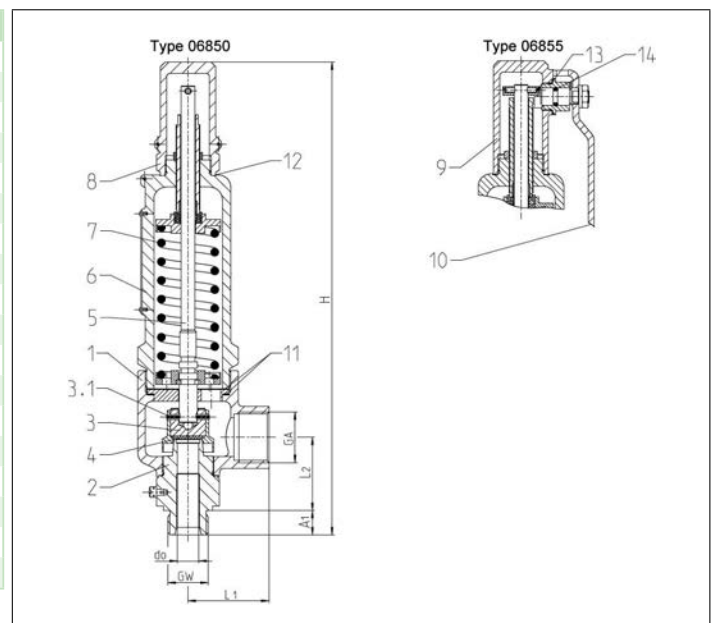

Typ 06850, 06855		Technical data								
Orifice	[mm]	10			14					
Inlet	GW	1/2	3/4	1	3/4	3/4	3/4	1	1	1
Outlet	GW	1	1	1	1	1-1/4	1-1/2	1	1-1/4	1-1/2
Dimension code	.X.	1024	1034	1044	1434	1435	1436	1444	1445	1446
Height	H	305.0	307.0	309.0	310.5	310.5	310.5	312.5	312.5	312.5
Length	L1	53.0	53.0	53.0	55.0	55.0	55.0	55.0	55.0	55.0
Length	L2	44.5	44.5	44.5	48.2	48.2	48.2	48.2	48.2	48.2
Length	A1	14.0	16.0	18.0	16.0	16.0	16.0	18.0	18.0	18.0
Weight 06850	ca. kg	3.2	3.2	3.2	3.4	3.4	3.4	3.4	3.4	3.4
Weight 06855	ca. kg	3.4	3.4	3.4	3.6	3.6	3.6	3.6	3.6	3.6
Coefficient of discharge	$\alpha_w S/G$	0.84	0.84	0.84	0.70	0.70	0.70	0.70	0.70	0.70
Coefficient of discharge	$\alpha_w L$	0.68	0.68	0.68	*	*	*	*	*	*
Min. set pressure	bar-g	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Max. set pressure	bar-g	150.0	150.0	150.0	120.0	120.0	120.0	120.0	120.0	120.0
Min. temperature	°C	-270	-270	-270	-270	-270	-270	-270	-270	-270
Max. temperature	°C	+300	+300	+300	+300	+300	+300	+300	+300	+300

Dimensions in mm. * 0.20-11.50 bar=0.50 / 11.51-74.99 bar=0.49 / 75.00-120.00 bar=0.46


Edition 2020-02

Type 06850, 06855		Technical data					
Orifice	[mm]	18					
Inlet	GW	1	1	1-1/4	1-1/4	1-1/2	1-1/2
Outlet	GW	1-1/2	2	1-1/2	2	1-1/2	2
Dimension code	.X.	1846	1847	1856	1857	1866	1867
Height	H	304.0	304.0	304.0	304.0	306.0	306.0
Length	L1	60.0	63.0	60.0	63.0	60.0	63.0
Length	L2	49.0	53.0	49.0	53.0	49.0	53.0
Length	A1	18.0	18.0	20.0	20.0	22.0	22.0
Weight 06850	ca. kg	3.9	4.1	3.9	4.1	4.0	4.2
Weight 06855	ca. kg	4.1	4.3	4.1	4.3	4.2	4.4
Coefficient of discharge	$\alpha_{wS/G}$	0.76	0.76	0.76	0.76	0.76	0.76
Coefficient of discharge	α_{wL}	0.50	0.50	0.50	0.50	0.50	0.50
Min. set pressure	bar-g	0.5	0.5	0.5	0.5	0.5	0.5
Max. set pressure	bar-g	110.0	110.0	110.0	110.0	110.0	110.0
Min. temperature	°C	-270	-270	-270	-270	-270	-270
Max. temperature	°C	+300	+300	+300	+300	+300	+300

Dimensions in mm.

Pressure-Temperature Rating

Maximum allowable set pressure safety valve Type 0685X

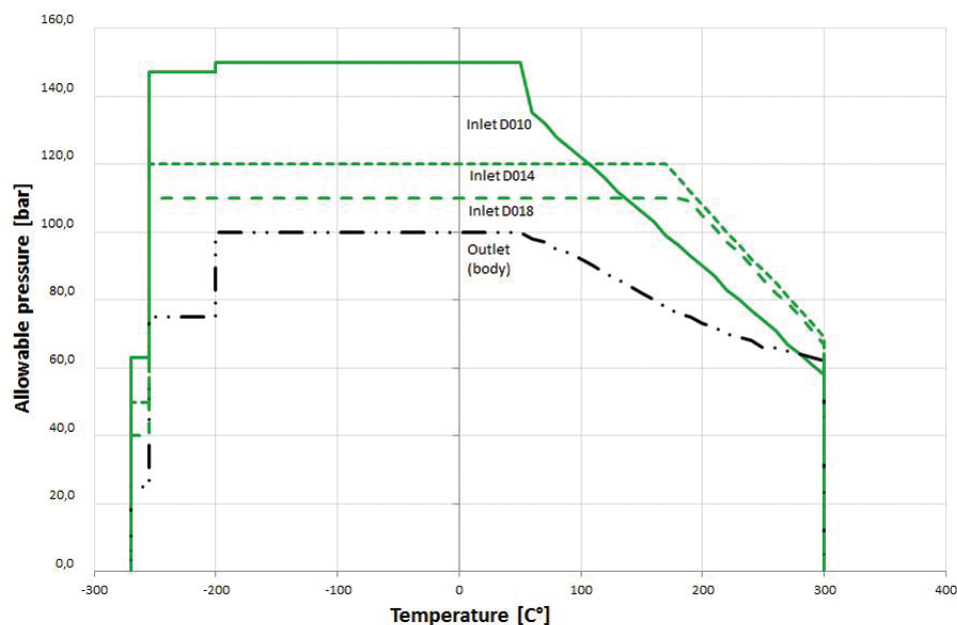

Safety Valves

Type 06850, Type 06855 - Sealing plate



Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

A = Saturated steam in kg/h*

B = Air in m³/h at 0°C and 1013,25 mbar

C = Water in kg/h at 20°C

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Set pressure in bar (g)	GW	1/2, 3/4 & 1			3/4 & 1			1, 1-1/4 & 1-1/2		
	d ₀ (mm)	10.0			14.0			18.0		
	A ₀ (mm ²)	78.5			153.94			254.0		
	Medium	A	B	C	A	B	C	A	B	C
0.5	-	56	2075	-	96	3035	-	152	5017	-
1.0	-	88	2851	-	146	4110	-	241	6794	-
2.0	-	142	4033	-	235	5812	-	406	9608	-
3.0	-	194	4939	-	317	7118	-	569	11767	-
4.0	-	243	5703	-	398	8220	-	714	13588	-
5.0	-	293	6377	-	480	9190	-	861	15192	-
6.0	-	343	6985	-	561	10067	-	1007	16642	-
7.0	-	393	7545	-	642	10874	-	1152	17975	-
8.0	-	444	8066	-	725	11625	-	1302	19216	-
9.0	-	494	8555	-	806	12330	-	1448	20382	-
10.0	-	544	9018	-	890	12997	-	1597	21485	-
15.0	-	794	11045	-	1297	15590	-	2328	26298	-
20.0	-	1053	12754	-	1721	18013	-	3089	30384	-
30.0	-	1572	15620	-	2568	22061	-	4609	37213	-
40.0	-	2098	18036	-	3427	25747	-	6152	42970	-
45.0	-	2355	19131	-	3846	27019	-	6903	45577	-
50.0	-	2633	20165	-	4301	28481	-	7720	-	-
60.0	-	3175	22090	-	5186	-	-	9307	-	-
65.0	-	3435	22992	-	5611	-	-	10071	-	-
70.0	-	3723	-	-	6081	-	-	10913	-	-
80.0	-	4276	-	-	6985	-	-	12536	-	-
90.0	-	4835	-	-	7897	-	-	14174	-	-
100.0	-	5396	-	-	8814	-	-	15819	-	-
110.0	-	5931	-	-	9687	-	-	17387	-	-
120.0	-	6512	-	-	10637	-	-	-	-	-
140.0	-	7642	-	-	-	-	-	-	-	-
150.0	-	8184	-	-	-	-	-	-	-	-

*not suitable for water steam!

Safety Valves

Type 06850, Type 06855 - O-ring



Safety Valves, angle type, stainless steel, type tested, TÜV-SV.1130. S/G/L

standard safety valve

with O-ring valve seal, "cleaned and degreased"

closed bonnet, gastight cap or lifting device

Inlet: male thread type G (BSPP) acc. to ISO 228/1

Outlet: female thread type G (BSPP) acc. to ISO 228/1

Part No. 06850.X.000002N with NBR O-ring valve seal	Orifice	10	14	18
	P_{min}	3.0 bar	3.0 bar	3.0 bar
	P_{max}	15.9 bar	14.9 bar	19.9 bar
Part No. 06850.X.000002F with FKM O-ring valve seal	Orifice	10	14	18
	P_{min}	16.0 bar	15.0 bar	20.0 bar
	P_{max}	250.0 bar	200.0 bar	110.0 bar

Available options - on request only:


· Flange-, NPT- or Tri-Clamp connection for in- and outlet



Applications:

Provided as safety device for protection against excessive pressure in gas cylinders and pressure vessels. Approved for gases and liquids. Working temperature: 0°C / 32°F (273K) up to 70°C / 158°F (343K), suitable for horizontal installation from 20 bar.

Materials	DIN EN	ASME/ASTM
1 Outlet body	1.4408	A 351 CF8M
2 Inlet body	1.4571	A 276 Grade 316Ti
3 Disc	1.4571	A 276 Grade 316Ti
4 O-ring	NBR or FKM	
5 Stem	1.4404	A 276 Grade 316L
6 Bonnet	1.4408	A 351 CF8M
7 Spring	1.4571	A 313 Grade 316Ti
8 Cap	1.4408	A 351 CF8M
9 Lifting cap	1.4408	A 351 CF8M
10 Lever	1.4301	A 276 Grade 304
Spare Parts		
3 Complete disc	1.4571+NBR or FKM	316Ti + NBR or FKM
4 O-ring + screw	NBR or FKM	
11 Gasket	1.4404 Graphite	316L Graphite
12 Gasket	PTFE	
13 Gasket	PTFE	
14 O-ring	FPM (VITON)	

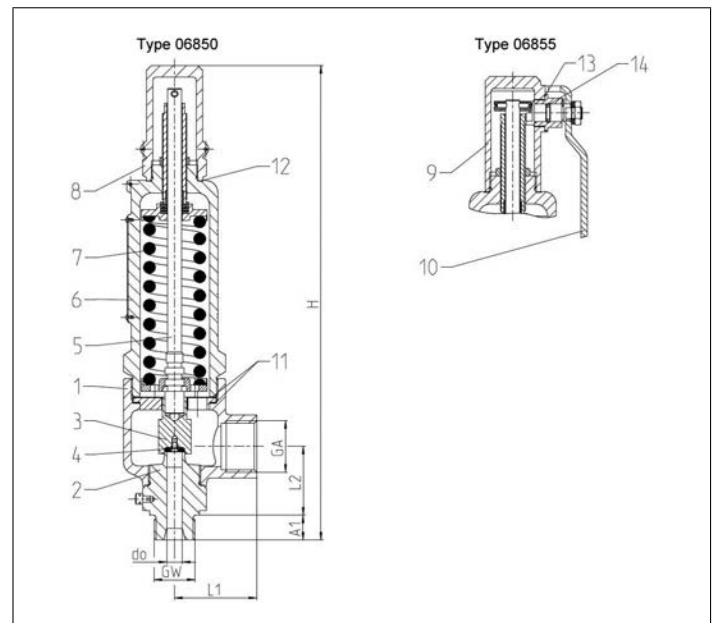

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Typ 06850, 06855		Technical data									
Orifice	[mm]	10			14						
Inlet	GW	1/2	3/4	1	3/4	3/4	3/4	1	1	1	1
Outlet	GW	1	1	1	1	1-1/4	1-1/2	1	1-1/4	1-1/2	1-1/2
Dimension code	.X.	1024	1034	1044	1434	1435	1436	1444	1445	1446	1446
Height	H	305.0	307.0	309.0	310.5	310.5	310.5	312.5	312.5	312.5	312.5
Length	L1	53.0	53.0	53.0	55.0	55.0	55.0	55.0	55.0	55.0	55.0
Length	L2	44.5	44.5	44.5	48.2	48.2	48.2	48.2	48.2	48.2	48.2
Length	A1	14.0	16.0	18.0	16.0	16.0	16.0	18.0	18.0	18.0	18.0
Weight 06850	ca. kg	3.2	3.2	3.2	3.4	3.4	3.4	3.4	3.4	3.4	3.4
Weight 06855	ca. kg	3.4	3.4	3.4	3.6	3.6	3.6	3.6	3.6	3.6	3.6
Coefficient of discharge	$\alpha_{wS/G}$	0.84	0.84	0.84	0.70	0.70	0.70	0.70	0.70	0.70	0.70
Coefficient of discharge	α_{wL}	0.61	0.61	0.61	0.54	0.54	0.54	0.54	0.54	0.54	0.54
Min. set pressure	bar-g	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Max. set pressure	bar-g	250.0	250.0	250.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0

Dimensions in mm.

Safety Valves

Type 06850, Type 06855 - O-ring



Type 06850, 06855		Technical data					
Orifice	[mm]	18					
Inlet	GW	1	1	1-1/4	1-1/4	1-1/2	1-1/2
Outlet	GW	1-1/2	2	1-1/2	2	1-1/2	2
Dimension code	.X.	1846	1847	1856	1857	1866	1867
Height	H	304.0	304.0	304.0	304.0	306.0	306.0
Length	L1	60.0	63.0	60.0	63.0	60.0	63.0
Length	L2	49.0	53.0	49.0	53.0	49.0	53.0
Length	A1	18.0	18.0	20.0	20.0	22.0	22.0
Weight 06850	ca. kg	3.9	4.1	3.9	4.1	4.0	4.2
Weight 06855	ca. kg	4.1	4.3	4.1	4.3	4.2	4.4
Coefficient of discharge	$\alpha_w S/G$	0.76	0.76	0.76	0.76	0.76	0.76
Coefficient of discharge	$\alpha_w L$	0.51	0.51	0.51	0.51	0.51	0.51
Min. set pressure	bar-g	3.0	3.0	3.0	3.0	3.0	3.0
Max. set pressure	bar-g	110.0	110.0	110.0	110.0	110.0	110.0

Dimensions in mm.

Safety Valves

Type 06850, Type 06855 - O-ring



Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

A = Saturated steam in kg/h

B = Air in m³/h at 0°C and 1013,25 mbar

C = Water in kg/h at 20°C

The capacity indicated below is for a fully opened valve.

d₀ - orifice

A₀ - flow area

Set pressure in bar (g)	GW	1/2, 3/4 & 1			3/4 & 1			1, 1-1/4 & 1-1/2		
	d ₀ (mm)	10.0			14.0			18.0		
	A ₀ (mm ²)	78.5			153.94			254.0		
	Medium	A	B	C	A	B	C	A	B	C
3.0	-	194	4431	-	317	7688	-	570	12003	-
4.0	-	244	5117	-	398	8878	-	715	13860	-
5.0	-	294	5721	-	480	9926	-	862	15496	-
6.0	-	344	6267	-	561	10873	-	1007	16975	-
7.0	-	393	6769	-	642	11744	-	1153	18335	-
8.0	-	444	7236	-	726	12555	-	1302	19601	-
9.0	-	494	7675	-	807	13317	-	1448	20790	-
10.0	-	545	8090	-	890	14037	-	1598	21915	-
15.0	-	794	9908	-	1298	17192	-	2329	26840	-
20.0	-	1054	11441	-	1721	19851	-	3089	30992	-
30.0	-	1572	14012	-	2568	24313	-	4609	37958	-
40.0	-	2099	16180	-	3428	28074	-	6152	43830	-
50.0	-	2634	18090	-	4302	31388	-	7720	49003	-
60.0	-	3175	19817	-	5186	34384	-	9308	53680	-
70.0	-	3723	21404	-	6081	37138	-	10914	57981	-
80.0	-	4277	22882	-	6985	39703	-	12537	61985	-
90.0	-	4835	24270	-	7898	42111	-	14174	65745	-
100.0	-	5397	25583	-	8814	44389	-	15820	69301	-
110.0	-	5931	26832	-	9688	46555	-	17387	72684	-
120.0	-	6513	28025	-	10637	48626	-	-	-	-
140.0	-	7642	30270	-	12482	52522	-	-	-	-
150.0	-	8184	31333	-	13368	54365	-	-	-	-
160.0	-	8758	32360	-	14305	56148	-	-	-	-
180.0	-	9847	34323	-	16083	59554	-	-	-	-
200.0	-	10898	36180	-	17801	62775	-	-	-	-
220.0	-	11931	37946	-	-	-	-	-	-	-
240.0	-	12983	39633	-	-	-	-	-	-	-
250.0	-	13522	40451	-	-	-	-	-	-	-

Safety Valves

Type 55335 - Insect protection screen




Insect protection screen for safety valves

to protect the outlet from insects etc.

wire gauge 0.56mm, mesh size 2.0mm,

"cleaned and degreased for oxygen service"


Part No. 55335.X.0765

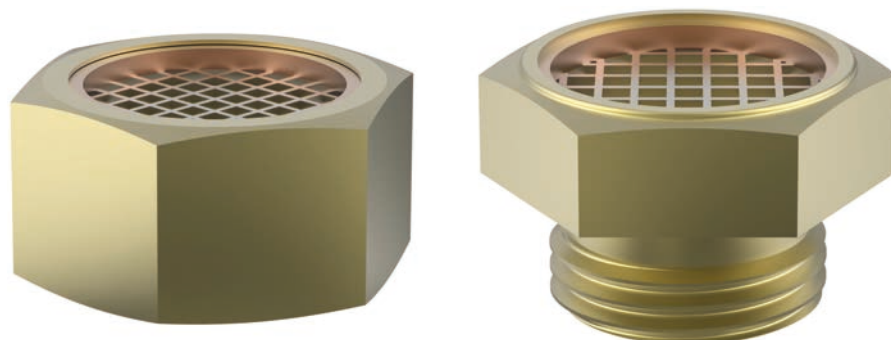

Applications:

Provided as safety device in the outlet of the safety valve against unauthorized ingress by insects, small animals or equivalent, which run a potential threat to the proper response characteristics of the valve.

Materials	DIN EN	ASME/ASTM
1 Copper ring	CW024A	C 106 C12200
2 Screen	1.4301	A 276 Grade 304
3 Union type	CW614N	B 283 UNS C38500

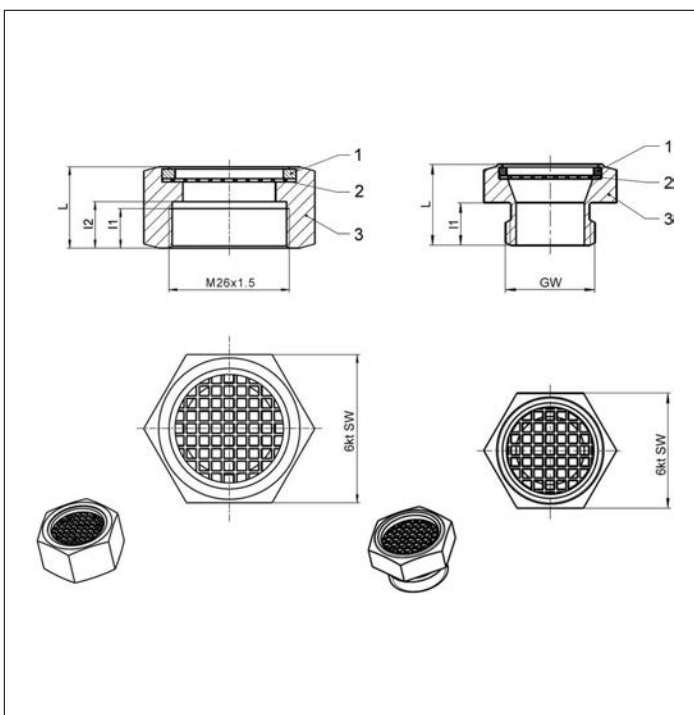

Type 55335	Technical Data							
Nominal size	GW	3/8	3/8	1/2	1/2	1/2	1	26x1.5
Thread type	BSPT (R)		NPT	BSPT (R)	NPT	BSPP (G)	BSPP (G)	M
Thread type		male	male	male	male	male	male	female
Dimension code	.X.	0140	0149	0150	0147	0141	0102	0148
Height	L	19.0	27.0	27.0	27.0	19.0	21.5	17.5
Length	l ₁	10.0	17.0	17.0	17.0	10.0	12.0	8.5
Length	l ₂	-	-	-	-	-	-	10.0
Wrench size across flats	SW	27	27	27	27	27	41	32

Abmessungen in mm.

Overflow Valves

Type 06386



Cryogenic Overflow Valves, angle type, bronze, PN40, not type tested

with adjusting device, metal to metal seated, closed bonnet

Inlet: male thread type G (BSPP) acc. to ISO 228/1

Outlet: female thread type G (BSPP) acc. to ISO 228/1

"cleaned and degreased for oxygen service"

Part No. 06386.X.9005 (0.5 up to 1.5 bar)

Part No. 06386.X.9003 (1.0 up to 4.0 bar)

Part No. 06386.X.9001 (3.0 up to 8.0 bar)

Part No. 06386.X.9002 (7.0 up to 17.0 bar)

Part No. 06386.X.9004 (16.0 up to 20.0 bar)

Part No. 06386.X.9007 (21.0 up to 28.0 bar)

Part No. 06386.X.9006 (28.0 up to 36.0 bar)

Available options - on request only:

· other spring ranges acc. to customer specification



Applications:


Provided as overflow valve for protection against excessive pressure in pipe systems and pressure vessels, which are not subject to approval.

Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K)

Materials	DIN EN	ASTM
1 Outlet body	CC491K	B 62 UNS C83600
2 Inlet body	1.4301	A 276 Grade 304
3 Disc	1.4541	A 276 Grade 321
4 Guide plate	CW453K	B 103 UNS C52100
5 Stem	CW453K	B 103 UNS C52100
6 Spring	1.4571	A 313 Grade 316Ti
7 Bonnet	1.4305	A 314 Grade 303
8 Spring clamp	CW614N	B 283 UNS C38500
9 Adjusting screw	CW614N	B 283 UNS C38500
10 Plug	CW614N	B 283 UNS C38500
11 Nut	CW614N	B 283 UNS C38500
12 Closing cap	CW614N	B 283 UNS C38500

Important: Adjusting ranges of springs are marked with a label on the bonnet.

Not to use as equipment with safety function acc. to Pressure Equipment Directive 2014/68/EU (PED) (No CE marking).

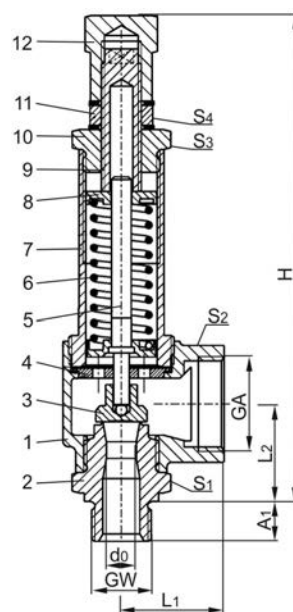

Type 06386	Technical data		
Nominal size	GW	1/2	3/4
Orifice	d ₀	10.5	10.5
Dimension code	.X.	1004	1006
Outlet	GA	1	1
Height	H	171	171
Length	L ₁	36	36
Length	L ₂	34	34
Length	A ₁	14	16
Wrench size across flats	S ₁	30	32
Wrench size across flats	S ₂	41	41
Wrench size across flats	S ₃	30	30
Wrench size across flats	S ₄	22	22
Weight	ca. kg	0.78	0.81

Dimensions in mm.

Overflow Valves

Type 06386



Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

Air in m³/h at 0°C and 1013.25 mbar

The capacity indicated below is for 10% pressure increase.

d₀ - orifice

A₀ - flow area

Set pressure in bar (g)	GW	1/2 & 3/4						
	d ₀ (mm)	10.5						
	A ₀ (mm ²)	86.6						
	Medium	Air						
Pressure range in bar		0.5 - 1.5	1.0 - 4.0	3.0 - 8.0	7.0 - 17.0	16.0 - 20.0	21.0 - 28.0	28.0 - 36.0
0.5	8	-	-	-	-	-	-	-
1.0	11	6	-	-	-	-	-	-
1.5	14	9	-	-	-	-	-	-
2.0	-	12	-	-	-	-	-	-
3.0	-	21	10	-	-	-	-	-
4.0	-	32	25	-	-	-	-	-
5.0	-	-	48	-	-	-	-	-
6.0	-	-	76	-	-	-	-	-
7.0	-	-	107	82	-	-	-	-
8.0	-	-	144	104	-	-	-	-
9.0	-	-	-	128	-	-	-	-
10.0	-	-	-	155	-	-	-	-
11.0	-	-	-	177	-	-	-	-
12.0	-	-	-	217	-	-	-	-
13.0	-	-	-	248	-	-	-	-
14.0	-	-	-	280	-	-	-	-
15.0	-	-	-	319	-	-	-	-
16.0	-	-	-	361	186	-	-	-
17.0	-	-	-	409	220	-	-	-
18.0	-	-	-	-	263	-	-	-
19.0	-	-	-	-	304	-	-	-
20.0	-	-	-	-	339	-	-	-
21.0	-	-	-	-	-	227	-	-
22.0	-	-	-	-	-	244	-	-
24.0	-	-	-	-	-	278	-	-
25.0	-	-	-	-	-	296	-	-
26.0	-	-	-	-	-	314	-	-
28.0	-	-	-	-	-	353	431	-
30.0	-	-	-	-	-	-	461	-
32.0	-	-	-	-	-	-	491	-
34.0	-	-	-	-	-	-	521	-
35.0	-	-	-	-	-	-	536	-
36.0	-	-	-	-	-	-	583	-

GW	1/2 & 3/4
Part No. spring	Pressure range of springs in bar
55345.0114.1767	0.5 - 1.5
55345.0263.0767	1.0 - 4.0
55345.0118.1767	3.0 - 8.0
55345.0119.1767	7.0 - 17.0
55345.0120.1767	16.0 - 20.0
55345.0233.0767	21.0 - 28.0
55345.0237.0767	28.0 - 36.0

Overflow Valves

Type 06381



Cryogenic Safety Valves, angle type, stainless steel, PN40, not type tested

metal to metal seated, closed bonnet,

Inlet: male thread type G (BSPP) acc. to ISO 228/1

Outlet: female thread type G (BSPP) acc. to ISO 228/1

"cleaned and degreased for oxygen service"

Part No. 06381.X.9005 (0.5 up to 1.5 bar)

Part No. 06381.X.9003 (1.0 up to 4.0 bar)

Part No. 06381.X.9001 (3.0 up to 8.0 bar)

Part No. 06381.X.9002 (7.0 up to 17.0 bar)

Part No. 06381.X.9004 (16.0 up to 21.0 bar)

Part No. 06381.X.9007 (21.0 up to 28.0 bar)

Part No. 06381.X.9006 (28.0 up to 36.0 bar)

Available options - on request only:

· other spring ranges acc. to customer specification



Applications:


Provided as overflow valve for protection against excessive pressure in pipe systems and pressure vessels, which are not subject to approval.

Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K)

Materials	DIN EN	ASTM
1 Outlet body	1.4308	A 351 CF8
2 Inlet body	1.4301	A 276 Grade 304
3 Disc	1.4541	A 276 Grade 321
4 Guide plate	1.4301	A 276 Grade 304
5 Stem	1.4571	A 276 Grade 316Ti
6 Spring	1.4571	A 313 Grade 316Ti
7 Bonnet	1.4308	A 351 CF 8
8 Spring Clamp	1.4301	A 276 Grade 304
9 Adjusting screw	1.4571	A 276 Grade 316Ti
10 Cap	1.4301	A 276 Grade 304

Important: Adjusting ranges of springs are marked with a label on the bonnet.

Not to use as equipment with safety function acc. to Pressure Equipment Directive 2014/68/EU (PED) (No CE marking).

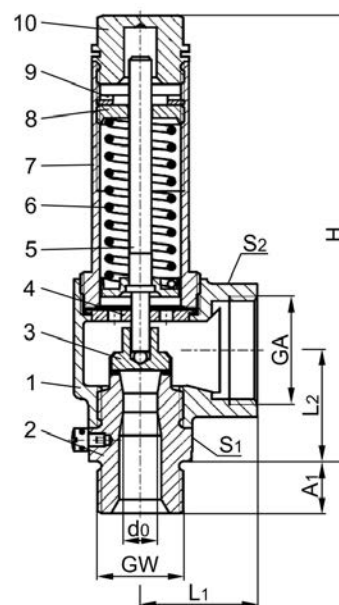

Type 06381	Technical data		
Nominal size	GW	1/2	3/4
Orifice	d ₀	10.5	10.5
Dimension code	.X.	1004	1006
Outlet	GA	1	1
Height	H	139	139
Length	L ₁	36	36
Length	L ₂	34	34
Length	A ₁	14	16
Wrench size across flats	S ₁	30	32
Wrench size across flats	S ₂	41	41
Weight	ca. kg	0.77	0.79

Overflow Valves

Type 06381



Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

Air in m³/h at 0°C and 1013.25 mbar

The capacity indicated below is for 10% pressure increase.

d₀ - orifice

A₀ - flow area

Set pressure in bar (g)	GW	1/2 & 3/4						
	d ₀ (mm)	10.5						
	A ₀ (mm ²)	86.6						
	Medium	Air						
Pressure range in bar		0.5 - 1.5	1.0 - 4.0	3.0 - 8.0	7.0 - 17.0	16.0 - 21.0	21.0 - 28.0	28.0 - 36.0
0.5	8	-	-	-	-	-	-	-
1.0	11	6	-	-	-	-	-	-
1.5	14	9	-	-	-	-	-	-
2.0	-	12	-	-	-	-	-	-
3.0	-	21	10	-	-	-	-	-
4.0	-	32	25	-	-	-	-	-
5.0	-	-	48	-	-	-	-	-
6.0	-	-	76	-	-	-	-	-
7.0	-	-	107	82	-	-	-	-
8.0	-	-	144	104	-	-	-	-
9.0	-	-	-	128	-	-	-	-
10.0	-	-	-	155	-	-	-	-
11.0	-	-	-	177	-	-	-	-
12.0	-	-	-	217	-	-	-	-
13.0	-	-	-	248	-	-	-	-
14.0	-	-	-	280	-	-	-	-
15.0	-	-	-	319	-	-	-	-
16.0	-	-	-	361	186	-	-	-
17.0	-	-	-	409	220	-	-	-
18.0	-	-	-	-	263	-	-	-
19.0	-	-	-	-	304	-	-	-
20.0	-	-	-	-	339	-	-	-
21.0	-	-	-	-	383	227	-	-
22.0	-	-	-	-	-	244	-	-
24.0	-	-	-	-	-	278	-	-
25.0	-	-	-	-	-	296	-	-
26.0	-	-	-	-	-	314	-	-
28.0	-	-	-	-	-	353	431	-
30.0	-	-	-	-	-	-	461	-
32.0	-	-	-	-	-	-	491	-
34.0	-	-	-	-	-	-	521	-
35.0	-	-	-	-	-	-	536	-
36.0	-	-	-	-	-	-	583	-

GW	1/2 & 3/4
Part No. spring	Pressure range of springs in bar
55345.0114.1767	0.5 - 1.5
55345.0263.0767	1.0 - 4.0
55345.0118.1767	3.0 - 8.0
55345.0119.1767	7.0 - 17.0
55345.0120.1767	16.0 - 21.0
55345.0233.0767	21.0 - 28.0
55345.0237.0767	28.0 - 36.0

Overflow Valves

Type 06001



Cryogenic Overflow Valves, angle type, bronze with elbow and silencer for noise reduction, PN40, not type tested

with adjusting device,
with carbon filled PTFE valve seal
Inlet: male thread type G (BSPP) acc. to ISO 228/1
"cleaned and degreased for oxygen service"

Part No. 06001.0400.9001 (11.0 up to 16.0 bar)

Part No. 06001.0400.9002 (16.0 up to 21.0 bar)

Part No. 06001.0400.9003 (22.0 up to 28.0 bar)

Part No. 06001.0400.9004 (28.0 up to 36.0 bar)

Available options - on request only:

· other spring ranges acc. to customer specification




Applications:

Provided as overflow valve for protection against excessive pressure in pipe systems and pressure vessels, which are not subject to approval.

Working temperature: -196°C / -321°F (77K) up to +65°C / +149°F (338K)

Materials	DIN EN	ASTM
1 Body	CW610N	B 283 UNS C36500
2 Disc	PTFE / Carbon filled (25%)	
3 Guide plate	CW614N	B 283 UNS C38500
4 Copper ring	Copper	Copper
5 Stem	CW614N	B 283 UNS C38500
6 Bonnet	CW614N	B 283 UNS C38500
7 Spring	1.4571	A 313 Grade 316Ti
8 Cap	CW614N	B 283 UNS C38500
9 Ring	FKM/V4A	
10 Nut	CW614N	B 283 UNS C38500
11 Adjusting screw	CW614N	B 283 UNS C38500
12 Closing cap	CW614N	B 283 UNS C38500
13 Elbow	CW614N	B 283 UNS C38500
14 Silencer	CC483K	B 30 UNS C90800

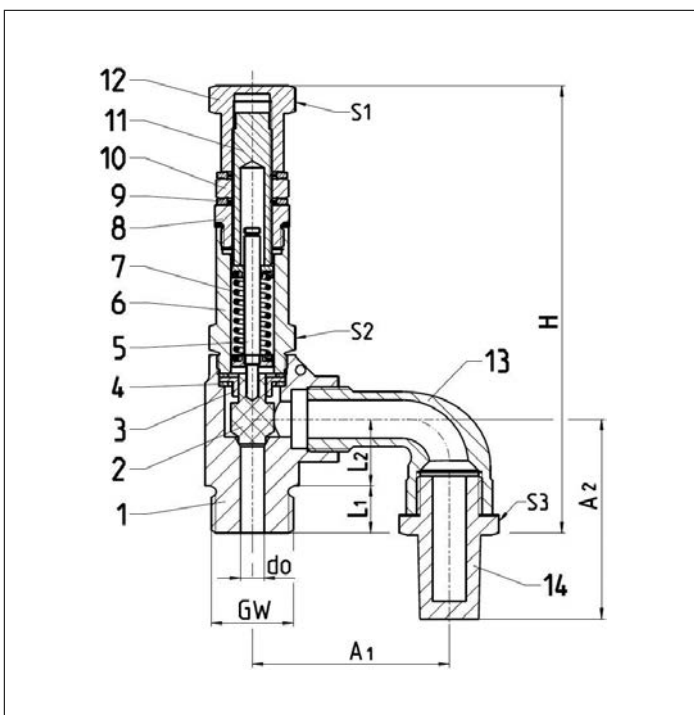

Important: Adjusting ranges of springs are marked with a label on the bonnet.

Not to use as equipment with safety function acc. to Pressure Equipment Directive 2014/68/EU (PED) (No CE marking).

Type 06001	Technical data	
Nominal size	GW	1/2
Orifice	d ₀	6.0
Dimension code	.X.	0400
Height	H	103
Length	L ₁	12
Length	L ₂	17
Length	A ₁	51
Wrench size across flats	S ₁	19
Wrench size across flats	S ₂	19
Wrench size across flats	S ₃	22
Weight	ca. kg	0.39

Dimensions in mm.

Overflow Valves

Type 06001



Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

Air in m³/h at 0°C and 1013.25 mbar

The capacity indicated below is for 10% pressure increase.

d₀ - orifice

A₀ - flow area

Set pressure in bar (g)	GW	1/2			
	d ₀ (mm)	6.0			
	A ₀ (mm ²)	28.3			
	Medium	Air			
Pressure range in bar		11.0 - 16.0	16.0 - 21.0	21.0 - 28.0	28.0 - 36.0
11.0		23	-	-	-
12.0		25	-	-	-
13.0		27	-	-	-
14.0		32	-	-	-
15.0		30	-	-	-
16.0		26	20	-	-
17.0		-	34	-	-
18.0		-	29	-	-
19.0		-	24	-	-
20.0		-	32	-	-
21.0		-	30	30	-
22.0		-	-	47	-
23.0		-	-	40	-
24.0		-	-	41	-
25.0		-	-	50	-
26.0		-	-	45	-
27.0		-	-	66	-
28.0		-	-	44	52
29.0		-	-	-	46
30.0		-	-	-	43
31.0		-	-	-	49
32.0		-	-	-	60
33.0		-	-	-	57
34.0		-	-	-	54
35.0		-	-	-	74
36.0		-	-	-	62

Changeover Valves

Type 06510 - Diverter Valve



Cryogenic Diverter Valves, bronze, PN50

for the installation of two safety valves,
provided for bursting disc connections,
"cleaned and degreased for oxygen service"

Part No. 06510.X.0000


Female thread connection (G) acc. to ISO 228/1

Part No. 06510.X.6***

Female thread connection NPT acc. to ANSI B 1.20.1

Available Options - on request only:

- Two extra test connections 1/4" edgeways
- Inlet: female thread (GW) 3/4"
- Outlet GA₁ with installed locking sleeve for easy positioning of safety valves
- Combination of different outlet threads GA₁ - GA₂
- **Safety lock (Part No. 55394.0043.0765)**

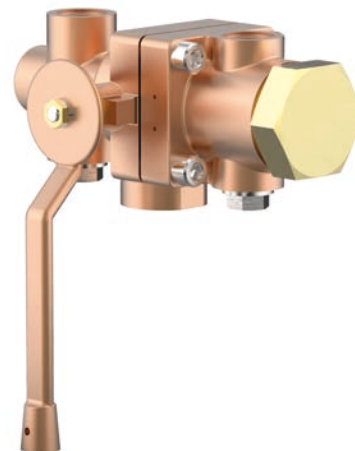


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body I	CC491K	B 62 UNS C83600
2 Body II	CC491K	B 62 UNS C83600
3 Ball	1.4571	A 276 Grade 316Ti
4 Seat rings	PCTFE	
5 Bush	CW614N	B 283 UNS C38500
6 Spring plates	1.4571	A 313 Grade 316Ti
7 Spring clamp	CW614N	B 283 UNS C38500
8 Thread ring	CW614N	B 283 UNS C38500
9 Plug	CW614N	B 283 UNS C38500
10 Stem	1.4301	A 276 Grade 304
11 Gland packing	Graphite / PTFE	
12 Lever	CC491K	B 62 UNS C83600

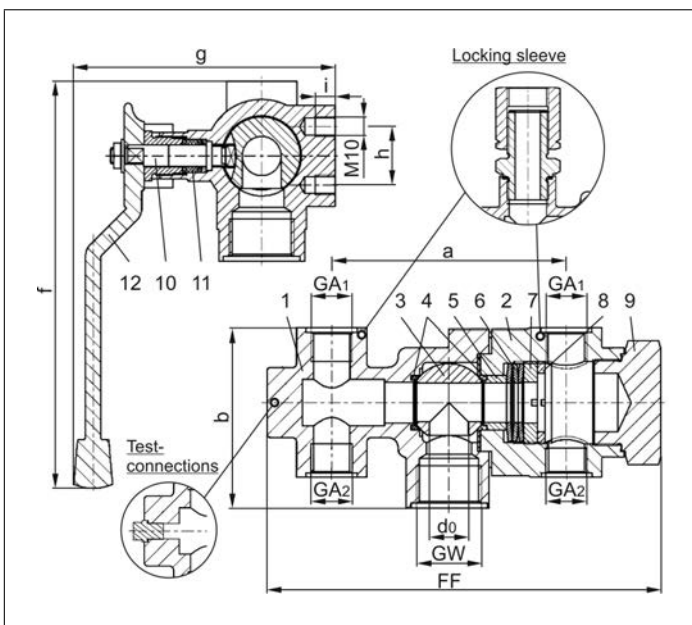

Type 06510 - Standard design	Technical Data		
Nominal Size	DN	20	20
Dimension code	.X.	2004	2006
Flow diameter	d ₀	20	20
Inlet	GW	1	1
Outlet	GA ₁	1/2	3/4
Outlet	GA ₂	1/2	1/2
Face-to-face dimension	FF	201	201
Length	a	120	120
Height	b	92	92
Length	f	208	208
Length	g	134	134
Length	h	30	30
Thread depth	i	10	10
Weight	ca. kg	4.8	4.7
Kvs - Value, one side open	m ³ /h	7.7	7.7
Cv - Value, one side open	gal /min	9.2	9.2

Dimensions in mm.

Important:

The valves must be fixed at the provided threads M10.

Changeover Valves

Type 06510 - Diverter Valve

HEROSE



Cryogenic Diverter Valves, bronze, PN50

for the installation of two safety valves,
provided for bursting disc connections,
"cleaned and degreased for oxygen service"

Part No. 06510.X.0008

Inlet: union type braze fitting for pipe outside diameter 26.9mm

Outlet: female thread connection (G) acc. to ISO 228/1

Part No. 06510.X.000*

Inlet: union type butt weld fitting, when order please indicate pipe diameter

Outlet: female thread connection (G) acc. to ISO 228/1

Part No. 06510.X.6026

Inlet: union type butt weld fitting for pipe 33.4mm S10

Outlet: female thread connection NPT acc. to ANSI B 1.20.1


Available options - on request only:

- Two extra test connections 1/4" edgeways
- Inlet: union type braze or butt weld fitting for other pipe diameter
- Outlet GA₁ with installed locking sleeve for easy positioning of safety valves
- Combination of different outlet threads GA₁ - GA₂
- **Safety lock (Part No. 55394.0043.0765)**


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

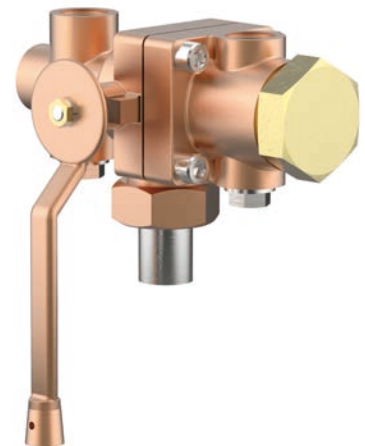

Materials	DIN EN	ASTM
1 Body I	CC491K	B 62 UNS C83600
2 Body II	CC491K	B 62 UNS C83600
3 Ball	1.4571	A 276 Grade 316Ti
4 Seat rings	PCTFE	
5 Bush	CW614N	B 283 UNS C38500
6 Spring plates	1.4571	A 313 Grade 316Ti
7 Spring clamp	CW614N	B 283 UNS C38500
8 Thread ring	CW614N	B 283 UNS C38500
9 Plug	CW614N	B 283 UNS C38500
10 Stem	1.4301	A 276 Grade 304
11 Gland packing	Graphit / PTFE	
12 Lever	CC491K	B 62 UNS C83600
13 Braze fitting	CC493K	B 505 UNS C93200
13a Weld fitting	1.4301	A 276 Grade 304
14 Union nut	CC493K	B 505 UNS C93200

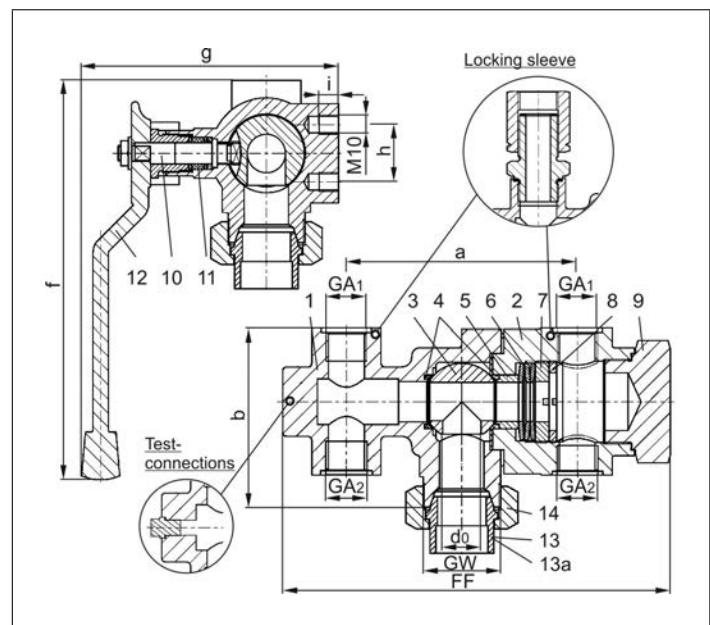

Type 06510 - Standard design		Technical data	
Nominal size	DN	20	20
Dimension code	.X.	2040	2060
Flow diameter	d ₀	20	20
Inlet	GW	M40x2	M40x2
Outlet	GA ₁	1/2	3/4
Outlet	GA ₂	1/2	1/2
Face-to-face dimension	FF	201	201
Length	a	120	120
Height	b	92	92
Length	f	208	208
Length	g	134	134
Length	h	30	30
Thread depth	i	10	10
Wrench size across flats	S ₁	50	50
Weight	ca. kg	5.1	5.0
Kvs - Value, one side open	m ³ /h	7.7	7.7
Cv - Value, one side open	gal /min	9.2	9.2

Dimensions in mm.

Edition 2020-02

Important:

The valves must be fixed at the provided threads M10.



Changeover Valves

Type 06510 - Diverter Valve



Cryogenic Diverter Valves, bronze, PN50

for the installation of two safety valves,
provided for bursting disc connections,
"cleaned and degreased for oxygen service"

Part No. 06510.X.0120

Female thread connection (G) acc. to ISO 228/1

Part No. 06510.X.6000

Female thread connection NPT acc. to ANSI B 1.20.1

3212/3214

3210



Available Options - on request only:


- Inlet with union type braze or butt weld fitting
- Two extra test connections 1/4" edgeways
- Outlet GA₁ with installed locking sleeve for easy positioning of safety valves
- Combination of different outlet threads GA₁ - GA₂
- **Safety lock (Part No. 55394.0049.0765)**

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body I	CC491K	B 62 UNS C83600
2 Body II	CC491K	B 62 UNS C83600
3 Ball	1.4571	A 276 Grade 316Ti
4 Seat rings	PCTFE	
5 Bush	CW614N	B 283 UNS C38500
6 Spring plates	1.4571	A 313 Grade 316Ti
7 Spring clamp	CW614N	B 283 UNS C38500
8 Thread ring	CW614N	B 283 UNS C38500
10 Stem	1.4301	A 276 Grade 304
11 Gland packing	Graphit / PTFE	
12 Lever	CC491K	B 62 UNS C83600

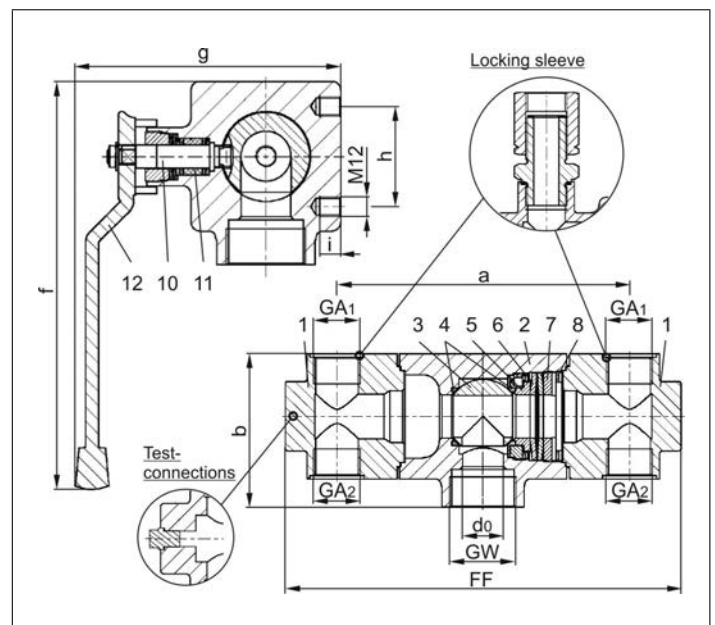

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 06510 - Standard design	Technical data			
Nominal size	DN	32	32	32
Dimension code	.X.	3210	3212	3214
Flow diameter	d ₀	30	30	30
Inlet	GW	1-1/2	1-1/2	1-1/2
Outlet	GA ₁	1	1-1/4	1-1/2
Outlet	GA ₂	1	1-1/4	1-1/2
Face-to-face dimension	FF	300	284	284
Length	a	210	210	210
Height	b	110	145	145
Length	f	245	245	245
Length	g	160	160	160
Length	h	60	60	60
Thread depth	i	12.5	12.5	12.5
Weight	ca. kg	12.2	13.5	13.5
Kvs - Value, one side open	m ³ /h	16.7	16.7	16.7
Cv - Value, one side open	gal /min	19.4	19.4	19.4

Dimensions in mm.

Important:

The valves must be fixed at the provided threads M12.

Changeover Valves

Type 06512 - Diverter Valve



Cryogenic Diverter Valves, bronze, PN50

for the installation of four safety valves,
provided for bursting disc connections,
"cleaned and degreased for oxygen service"

Part No. 06512.X.0000


Female thread connection (G) acc. to ISO 228/1

Part No. 06512.X.6000

Female thread connection NPT acc. to ANSI B 1.20.1

Available Options - on request only:

- Inlet with union type braze or butt weld fitting
- Two extra test connections 1/4" edgeways
- Inlet: female thread (GW) 1/2" or 3/4"
- Outlet GA₁ with installed locking sleeve for easy positioning of safety valves
- Combination of different outlet threads GA₁ - GA₂
- **Safety lock (Part No. 55394.0043.0765)**

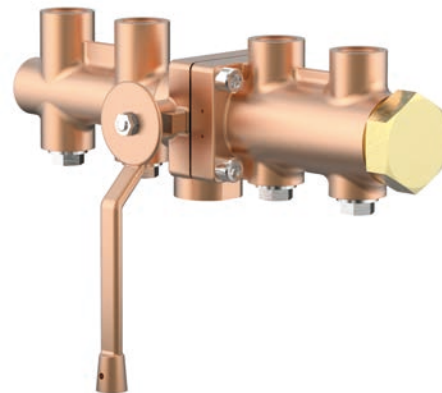


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body I	CC491K	B 62 UNS C83600
2 Body II	CC491K	B 62 UNS C83600
3 Ball	1.4571	A 276 Grade 316Ti
4 Seat rings	PCTFE	
5 Bush	CW614N	B 283 UNS C38500
6 Spring plates	1.4571	A 313 Grade 316Ti
7 Spring clamp	CW614N	B 283 UNS C38500
8 Thread ring	CW614N	B 283 UNS C38500
9 Plug	CW614N	B 283 UNS C38500
10 Stem	1.4301	A 276 Grade 304
11 Gland packing	Graphit / PTFE	
12 Lever	CC491K	B 62 UNS C83600

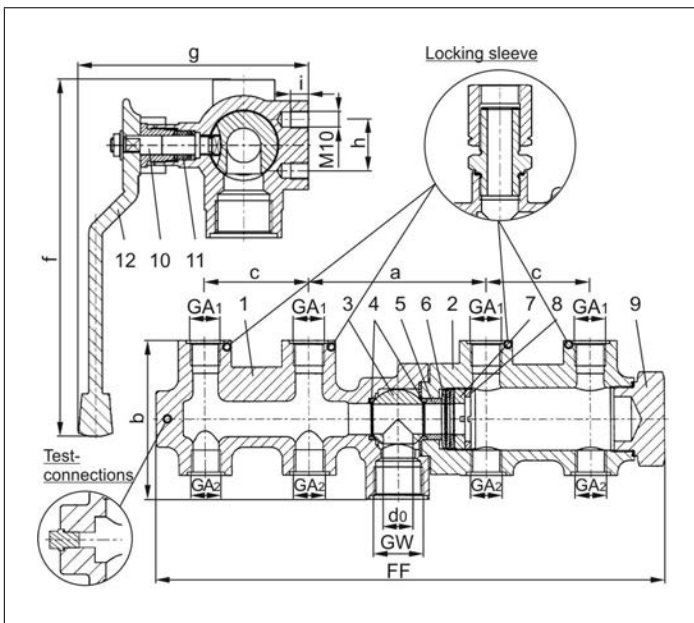

Type 06512 - Standard design	Technical data		
Nominal size	DN	20	20
Dimension code	.X.	2004	2006
Flow diameter	d ₀	20	20
Inlet	GW	1	1
Outlet	GA ₁	1/2	3/4
Outlet	GA ₂	1/2	1/2
Face-to-face dimension	FF	345	345
Length	a	120	120
Height	b	107	107
Length	c	70	70
Length	f	223	223
Length	g	134	134
Length	h	30	30
Thread depth	i	10	10
Weight	ca. kg	7.2	7.1
Kvs - Value, one side open	m ³ /h	7.7	7.7
Cv - Value, one side open	gal /min	9.2	9.2

Dimensions in mm.

Edition 2020-02

Important:

The valves must be fixed at the provided threads M10.



Changeover Valves

Type 06520 - Diverter Valve



Cryogenic Diverter Valves, stainless steel, inner parts made of brass, PN50

for the installation of two safety valves,
provided for bursting disc connections,
"cleaned and degreased for oxygen service"

Part No. 06520.X.0000

Female thread connection (G) acc. to ISO 228/1

Part No. 06520.X.6***

Female thread connection NPT acc. to ANSI B 1.20.1



Available Options - on request only:


- Two extra test connections 1/4" edgeways
- Inlet: female thread (GW) 3/4"
- Outlet GA₁ with installed locking sleeve for easy positioning of safety valves
- Combination of different outlet threads GA₁ - GA₂
- **Safety lock (Part No. 55394.0043.0765)**

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body I	1.4308	A 351 CF8
2 Body II	1.4308	A 351 CF8
3 Ball	1.4571	A 276 Grade 316Ti
4 Seat rings	PCTFE	
5 Bush	CW614N	B 283 UNS C38500
6 Spring plates	1.4571	A 313 Grade 316Ti
7 Spring clamp	CW614N	B 283 UNS C38500
8 Thread ring	CW614N	B 283 UNS C38500
9 Plug	1.4408	A 351 CF8M
10 Stem	1.4301	A 276 Grade 304
11 Gland packing	Graphite / PTFE	
12 Lever	1.4308	A 351 CF8

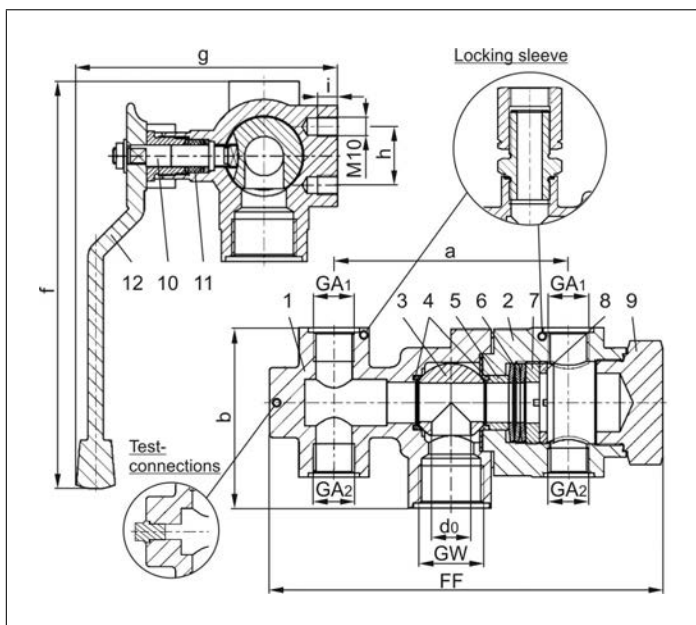

Type 06520 - Standard design		Technical Data	
Nominal Size	DN	20	20
Dimension code	.X.	2004	2006
Flow diameter	d ₀	20	20
Inlet	GW	1	1
Outlet	GA ₁	1/2	3/4
Outlet	GA ₂	1/2	1/2
Face-to-face dimension	FF	201	201
Length	a	120	120
Height	b	92	92
Length	f	208	208
Length	g	134	134
Length	h	30	30
Thread depth	i	10	10
Weight	ca. kg	4.8	4.7
Kvs - Value, one side open	m ³ /h	7.7	7.7
Cv - Value, one side open	gal /min	9.2	9.2

Dimensions in mm.

Important:

The valves must be fixed at the provided threads M10.

Changeover Valves

Type 06530 - Diverter Valve



Cryogenic Diverter Valves, stainless steel, PN50

for the installation of two safety valves,
provided for bursting disc connections,
"cleaned and degreased for oxygen service"

Part No. 06530.X.0000

Female thread connection (G) acc. to ISO 228/1

Part No. 06530.X.6***

Female thread connection NPT acc. to ANSI B 1.20.1



Available Options - on request only:


- Two extra test connections 1/4" edgeways
- Inlet: female thread (GW) 3/4"
- Outlet GA₁ with installed locking sleeve for easy positioning of safety valves
- Combination of different outlet threads GA₁ - GA₂
- **Safety lock (Part No. 55394.0043.0765)**

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body I	1.4308	A 351 CF8
2 Body II	1.4308	A 351 CF8
3 Ball	1.4571	A 276 Grade 316Ti
4 Seat rings	PCTFE	
5 Bush	1.4301	A 276 Grade 304
6 Spring plates	1.4571	A 313 Grade 316Ti
7 Spring clamp	1.4571	A 276 Grade 316Ti
8 Thread ring	1.4571	A 276 Grade 316Ti
9 Plug	1.4408	A 351 CF8M
10 Stem	1.4301	A 276 Grade 304
11 Gland packing	Graphite / PTFE	
12 Lever	1.4308	A 351 CF8

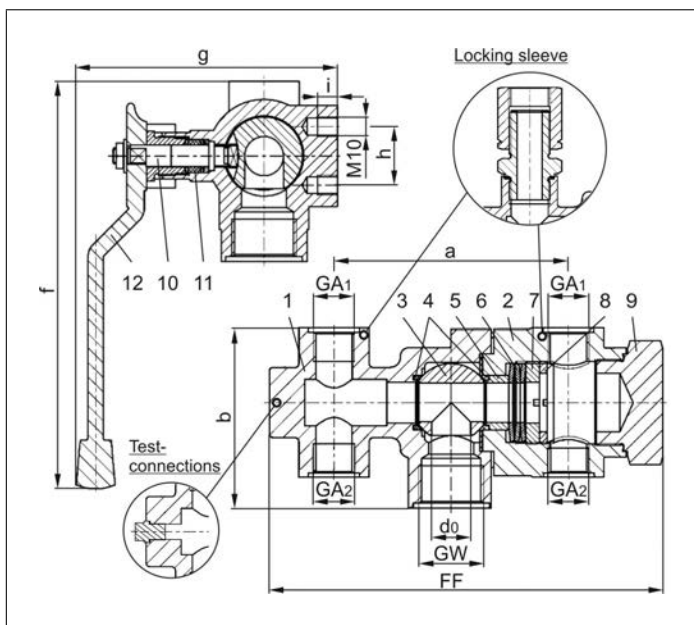

Type 06530 - Standard design		Technical Data	
Nominal Size	DN	20	20
Dimension code	.X.	2004	2006
Flow diameter	d ₀	20	20
Inlet	GW	1	1
Outlet	GA ₁	1/2	3/4
Outlet	GA ₂	1/2	1/2
Face-to-face dimension	FF	201	201
Length	a	120	120
Height	b	92	92
Length	f	208	208
Length	g	134	134
Length	h	30	30
Thread depth	i	10	10
Weight	ca. kg	4.8	4.7
Kvs - Value, one side open	m ³ /h	7.7	7.7
Cv - Value, one side open	gal /min	9.2	9.2

Dimensions in mm.

Edition 2020-02

Important:

The valves must be fixed at the provided threads M10.



Changeover Valves

Type 7111 - Diverter-Plug-Valve



Cryogenic Diverter Plug Valves, bronze, PN50


for the installation of two safety valves,
provided for bursting disc connections,
"cleaned and degreased for oxygen service"

Part No. 7111.X

Female thread connection (G) acc. to ISO 228/1 or
Female thread connection NPT acc. to ANSI B 1.20.1

Available Options - on request only:

- Inlet with union type braze or butt weld fitting
- Combination of different outlet threads GA₁ - GA₂ - GA₃

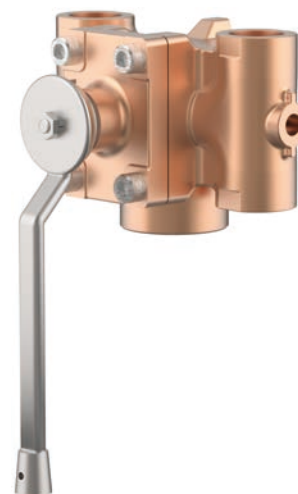

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

For O₂-applications: Up to 60°C / 140°F (333K): maximum oxygen pressure up to 40 bar

From 60°C / 140°F (333K): maximum oxygen pressure up to 25 bar

Materials	DIN EN	ASTM
1 Body	CC491K	C83600
2 Seal	PTFE	
3 Pin	1.4301	304
4 Cock plug	CW614N	C38500
5 Upper part	CC491K	C83600
6 Stem	1.4301	304
7 Seal	PTFE	
8 Gland packing	Graphite / PTFE	
9 Disc spring	1.4310	301
10 STB screw	CW614N	C38500
11 Screw	1.4301	304
12 Lever	1.4308	CF8
13 Disc spring	1.4568	631
14 Spring	Cu	C11000

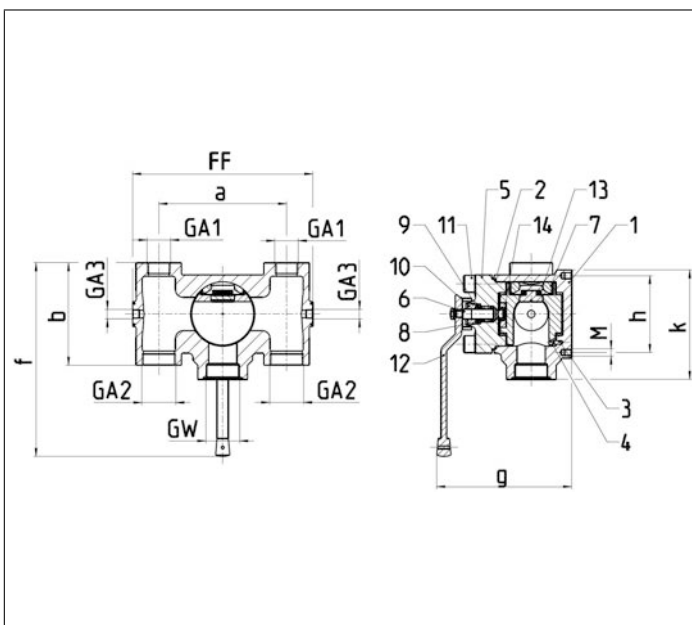

Type 7111 - Standard design		Technical Data					
Nominal Size	DN	32	32	32	32	32	32
Dimension code	.X.	FN14000. D3001	FN12000. D3002	FN10000. D3003	FG14000. D3005	FG12000. D3006	FG10000. D3007
Inlet	GW	1-1/2 NPT	1-1/4 NPT	1 NPT	1-1/2 G	1-1/4 G	1 G
Outlet	GA ₁	1	3/4	1/2	1	3/4	1/2
Outlet	GA ₂	1	3/4	1/2	1	3/4	1/2
Test connection	GA ₃	1/4	1/4	1/4	1/4	1/4	1/4
Face-to-face dimension	FF	180	180	180	180	180	180
Length	a	125	125	125	125	125	125
Height	b	94	94	94	94	94	94
Length	f	247	247	247	247	247	247
Length	g	154	154	154	154	154	154
Length	h	82	82	82	82	82	82
Length	k	113	113	113	113	113	113
Weight	ca. kg	5.6	5.6	5.6	5.6	5.6	5.6
Kvs - Value, one side open	m ³ /h	22.8	16.0	10.0	22.8	16.0	10.0
Cv - Value, one side open	gal /min	26.5	18.6	11.6	26.5	18.6	11.6
Kvs - Value, both sides open	m ³ /h	43.7	33.0	20.0	43.7	33.0	20.0
Cv - Value, both sides open	gal /min	50.8	38.4	23.3	50.8	38.4	23.3

Dimensions in mm.

Edition 2020-02

Changeover Valves

Type 7111 - Diverter-Plug-Valve



Type 7111 - Standard design		Technical Data			
Nominal Size	DN	50	50	50	50
Dimension code	.X.	FN14000. D5001	FN20000. D5004	FG14000. D5005	FG20000. D5008
Inlet	GW	1-1/2 NPT	2 NPT	1-1/2 G	2 G
Outlet	GA ₁	1	1-1/2	1	1-1/2
Outlet	GA ₂	1	1-1/2	1	1-1/2
Test connection	GA ₃	1/4	1/4	1/4	1/4
Face-to-face dimension	FF	254	254	254	254
Length	a	180	180	180	180
Height	b	144	144	144	144
Length	f	272	272	272	272
Length	g	190	190	190	190
Length	h	108	108	108	108
Length	k	124	124	124	124
Weight	ca. kg	16.9	16.9	16.9	16.9
Kvs - Value, one side open	m ³ /h	25.3	49.5	25.3	49.5
Cv - Value, one side open	gal /min	29.3	57.4	29.3	57.4
Kvs - Value, both sides open	m ³ /h	47.0	114.0	47.0	114.0
Cv - Value, both sides open	gal /min	54.5	132.2	54.5	132.2

Dimensions in mm.



Changeover Valves

Type 06405 - Changeover Valve



Cryogenic Changeover Valves, brass

for the installation of two safety valves,
with indicator and two test connections G 1/4,
"cleaned and degreased for oxygen service"

Part No. 06405.0150.0000, DN15, PN40, metal to metal seated

Female thread connection (G) acc. to ISO 228/1

Part No. 06405.0150.6000, DN15, PN40, metal to metal seated


Female thread connection NPT acc. to ANSI B 1.20.1

Part No. 06405.0250.0000, DN25, PN45, PTFE valve seal

Female thread connection (G) acc. to ISO 228/1

Part No. 06405.0250.6000, DN25, PN45, PTFE valve seal

Female thread connection NPT acc. to ANSI B 1.20.1

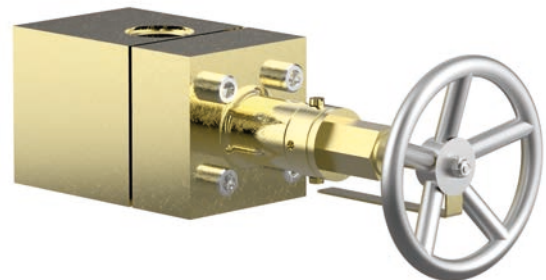

Available options - on request only:


- Valve with bursting disc connections
- Outlet: GA with installed locking sleeve for easy positioning of safety valves
- Outlet: GA with thread 3/4"

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K)

Materials	DIN EN	ASTM
1 Body I	CW614N	B 283 UNS C38500
2 Body II	CW614N	B 283 UNS C38500
3 Disc	1.4301	A 276 Grade 304
4 Valve seal DN25	PTFE	
5 Stem	1.4301	A 276 Grade 304
6 Gland packing	Graphite / PTFE	
7 Top ring	CW614N	B 283 UNS C38500
8 Gland nut DN15	CW710R	no reference
8 Gland nut DN25	CW614N	B 283 UNS C38500
9 Handwheel	Aluminium alloy	

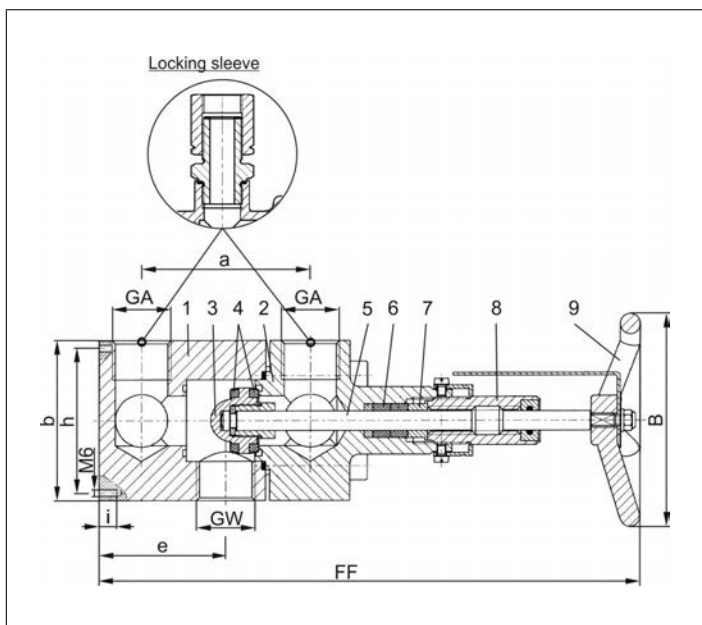

Important:

The valves must be fixed at the provided threads M6.

Type 06405 - Standard design	Technical data		
Nominal size	DN	15	25
Dimension code	.X.	0150	0250
Inlet	GW	3/4	1
Outlet	GA	1/2	1
Face-to-face dimension	FF	240	310
Length	a	80	96
Length	b	65	90
Length	e	50	72
Length	h	55	80
Thread depth	i	12	12
Handwheel-Ø	B	100	120
Weight	ca. kg	4.1	9.5
Kvs - Value, one side open	m ³ /h	6.0	14.0
Cv - Value, one side open	gal /min	6.9	16.1
Kvs - Value, central position	m ³ /h	13.0	25.0
Cv - Value, central position	gal /min	15.0	28.9

Dimensions in mm.

Changeover Valves

Type 06401 - Changeover Valve DN15



Cryogenic Changeover Valves, stainless steel, PN125

for the installation of two safety valves,
with two test connections G 1/4,
"cleaned and degreased for oxygen service"

Part No. 06401.0150.0000


In- and Outlet: locking sleeve G 3/4

Part No. 06401.0150.9***

*** Changeover valves with other threads for
vessel or safety valve connection on request

Available options - on request only:

- Changeover valves with pneumatic or electric actuator
- Inlet GW and/or outlet GA with female thread (G) acc. to ISO 228/1
- Inlet GW and/or outlet GA with female thread NPT acc. to ANSI B 1.20.1
- Combination of different thread connections GW - GA

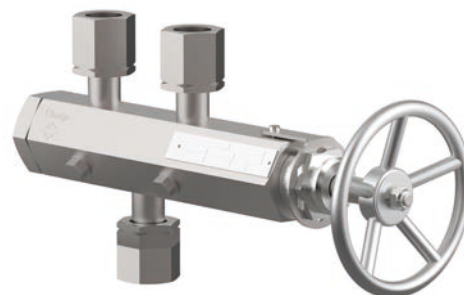


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K)

Materials	DIN EN	ASTM
1 Body	1.4571	A 276 Grade 316Ti
2 Plug	1.4571	A 276 Grade 316Ti
3 Disc stem	1.4571	A 276 Grade 316Ti
4 Valve seal	PTFE / Carbon filled (25%)	
5 Disc	1.4571	A 276 Grade 316Ti
6 Disc nut	1.4301/A2	A 194 B8
7 Gland packing	PTFE / Carbon filled (25%)	
8 Head piece	CW452K nickel plated	B 159 UNS C51900 nickel plated
9 Stem	1.4571	A 276 Grade 316Ti
10 Handwheel	Aluminium alloy	
11 Welding piece	1.4571	A 276 Grade 316Ti
12 Locking sleeve	1.4571	A 276 Grade 316Ti
13 Thread connection	1.4571	A 276 Grade 316Ti

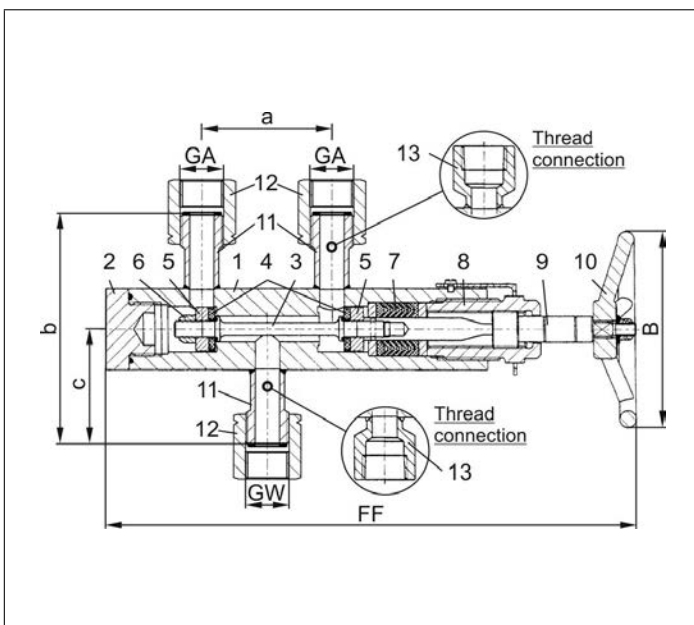

Typ 06401 - Standard design	Technical data	
Nominal size	DN	15
Inlet	GW	G 3/4
Outlet	GA	G 3/4
Face-to-face dimension	FF	325
Handwheel-Ø	B	120
Length	a	80
Height	b	140
Length	c	70
Weight	ca. kg	5.0
Kvs - Value, one side open	m³/h	4.0
Cv - Value, one side open	gal /min	4.6
Kvs - Value, central position	m³/h	5.8
Cv - Value, central position	gal /min	6.7

Dimensions in mm.

Changeover Valves

Type 06401 - Changeover Valve DN15



Cryogenic Changeover Valves, stainless steel, PN160

for the installation of two safety valves,
with two test connections G 1/4,
"cleaned and degreased for oxygen service"

Part No. 06401.0150.9029

Inlet: Flange, DN15, PN 160

Outlet: locking sleeve G 3/4

Part No. 06401.0150.9***

*** Changeover valves with other flanges for vessel connection
and threaded connection for safety valves on request

Available options - on request only:



- Changeover valves with pneumatic or electric actuator
- Outlet GA with female thread (G) acc. to ISO 228/1
- Outlet GA with female thread NPT acc. to ANSI B 1.20.1
- Outlet GA with flanged connections

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K)

Materials	DIN EN	ASTM
1 Body	1.4571	A 276 Grade 316Ti
2 Plug	1.4571	A 276 Grade 316Ti
3 Disc stem	1.4571	A 276 Grade 316Ti
4 Valve seal	PTFE / Carbon filled (25%)	
5 Disc	1.4571	A 276 Grade 316Ti
6 Disc nut	1.4301/A2	A 194 B8
7 Gland packing	PTFE / Carbon filled (25%)	
8 Head piece	CW452K nickel plated	B 159 UNS C51900 nickel plated
9 Stem	1.4571	A 276 Grade 316Ti
10 Handwheel	Aluminium alloy	
11 Welding piece	1.4571	A 276 Grade 316Ti
12 Locking sleeve	1.4571	A 276 Grade 316Ti
13 Thread connection	1.4571	A 276 Grade 316Ti
14 Adapter	1.4571	A 276 Grade 316Ti
15 Flange	1.4571	A 276 Grade 316Ti

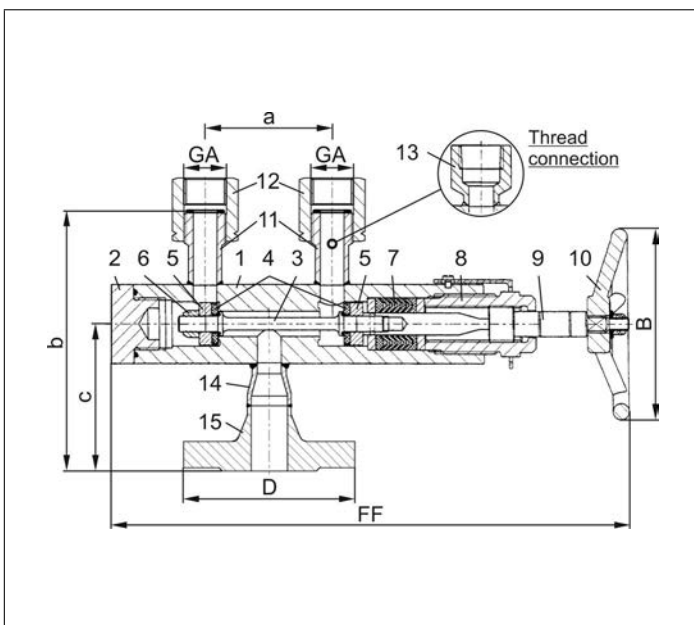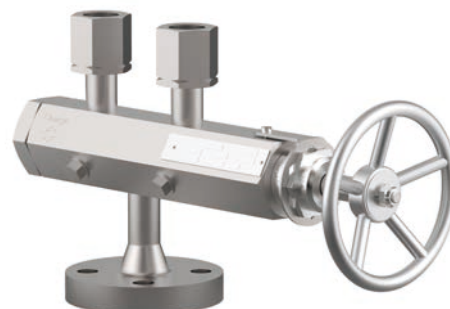

Type 06401 - Standard design	Technical data	
Nominal size	DN	15
Flange diameter	D	105
Outlet	GA	G 3/4
Face-to-face dimension	FF	325
Handwheel-Ø	B	120
Length	a	80
Height	b	170
Length	c	100
Weight	ca. kg	6.0
Kvs - Value, one side open	m³/h	4.0
Cv - Value, one side open	gal /min	4.6
Kvs - Valve, central position	m³/h	5.8
Cv - Valve, central position	gal /min	6.7

Dimensions in mm.

Changeover Valves

Type 06401 - Changeover Valve DN25



Cryogenic Changeover Valves, stainless steel, PN125


for the installation of two safety valves,
with two test connections G 1/4,
"cleaned and degreased for oxygen service"

Part No. 06401.0250.9045

In- and Outlet: locking sleeve G 1

Part No. 06401.0250.9***

*** Changeover valves with other threads for
vessel or safety valve connection on request

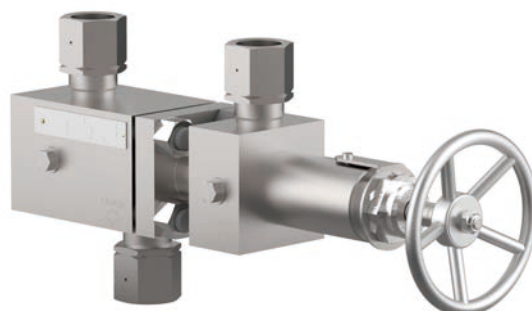

Available options - on request only:


- Changeover valves with pneumatic or electric actuator
- Inlet GW and/or outlet GA with female thread (G) acc. to ISO 228/1
- Inlet GW and/or outlet GA with female thread NPT acc. to ANSI B 1.20.1
- Combination of different thread connections GW - GA

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K)

Materials	DIN EN	ASTM
1 Body	1.4571	A 276 Grade 316Ti
2 Plug	1.4571	A 276 Grade 316Ti
3 Disc stem	1.4571	A 276 Grade 316Ti
4 Valve seal	PCTFE	
5 Disc	1.4571	A 276 Grade 316Ti
6 Disc stem	1.4571	A 276 Grade 316Ti
7 Gland packing	PTFE / Carbon filled (25%)	
8 Head piece	CW452K nickel plated	B 159 UNS C51900 nickel plated
9 Stem	1.4571	A 276 Grade 316Ti
10 Handwheel	Aluminium alloy	
11 Welding piece	1.4571	A 276 Grade 316Ti
12 Locking sleeve	1.4571	A 276 Grade 316Ti
13 Thread connection	1.4571	A 276 Grade 316Ti

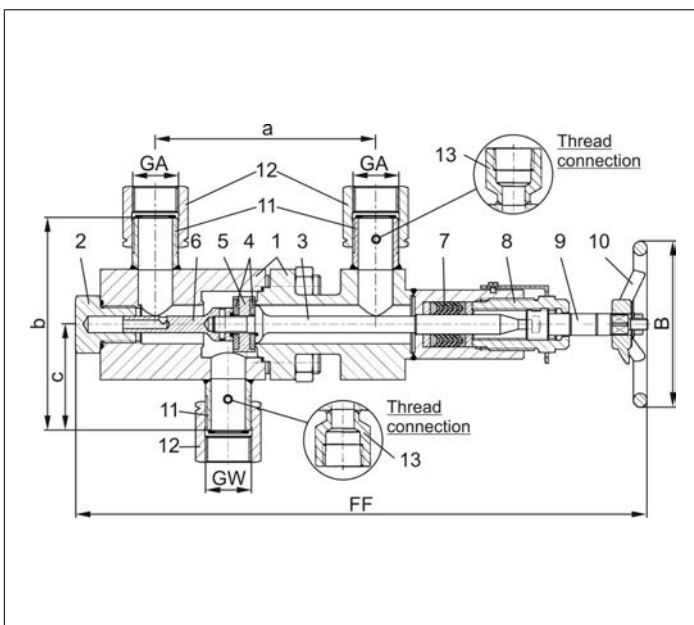

Typ 06401 - Standard design	Technical data	
Nominal size	DN	25
Inlet	GW	G 1
Outlet	GA	G 1
Face-to-face dimension	FF	415
Handwheel-Ø	B	120
Length	a	160
Height	b	160
Length	c	80
Weight	ca. kg	11.7
Kvs - Value, one side open	m³/h	13.0
Cv - Value, one side open	gal /min	15.0
Kvs - Value, central position	m³/h	15.5
Cv - Value, central position	gal /min	17.9

Dimensions in mm.

Changeover Valves

Type 06401 - Changeover Valve DN25



Cryogenic Changeover Valves, stainless steel, PN160

for the installation of two safety valves,
with two test connections G 1/4,
"cleaned and degreased for oxygen service"


Part No. 06401.0250.9018

Inlet Flange, DN 25, PN 160

Outlet: locking sleeve G1

Part No. 06401.0250.9***

*** Changeover valves with other flanges for vessel connection
and connection for safety valves on request

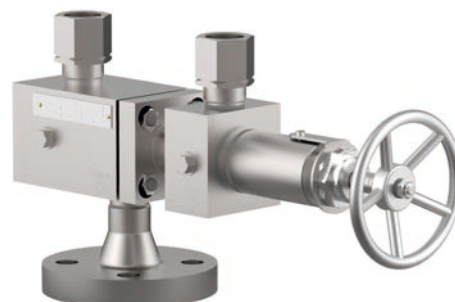

Available options - on request only:


- Changeover valves with pneumatic or electric actuator
- Outlet GA with female thread (G) acc. to ISO 228/1
- Outlet GA with female thread NPT acc. to ANSI B 1.20.1
- Outlet GA with flanged connections

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K)

Materials	DIN EN	ASTM
1 Body	1.4571	A 276 Grade 316Ti
2 Plug	1.4571	A 276 Grade 316Ti
3 Disc stem	1.4571	A 276 Grade 316Ti
4 Valve seal	PCTFE	
5 Disc	1.4571	A 276 Grade 316Ti
6 Disc stem	1.4571	A 276 Grade 316Ti
7 Gland packing	PTFE / Carbon filled (25%)	
8 Head piece	CW452K nickel plated	B 159 UNS C51900 nickel plated
9 Stem	1.4571	A 276 Grade 316Ti
10 Handwheel	Aluminium alloy	
11 Welding piece	1.4571	A 276 Grade 316Ti
12 Locking sleeve	1.4571	A 276 Grade 316Ti
13 Thread connection	1.4571	A 276 Grade 316Ti
14 Adapter	1.4571	A 276 Grade 316Ti
15 Flange	1.4571	A 276 Grade 316Ti

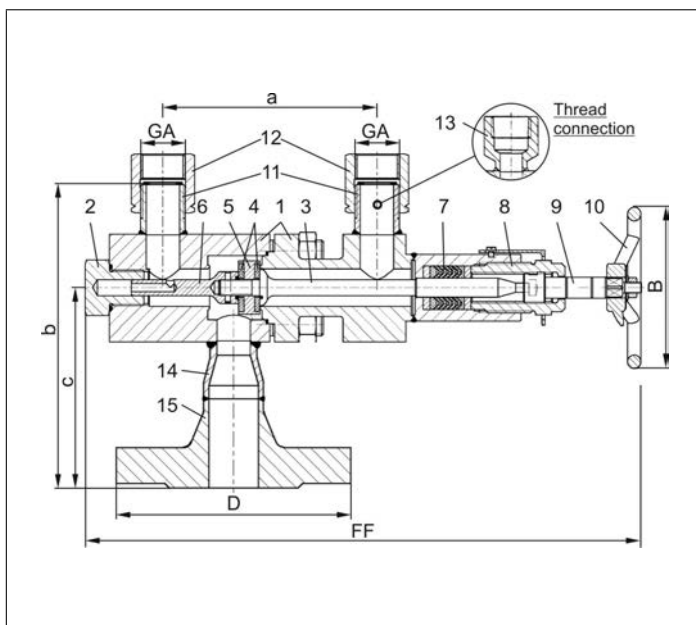

Type 06401 - Standard design	Technical data	
Nominal size	DN	25
Flange diameter	D	140
Outlet	GA	G 1
Face-to-face dimension	FF	415
Handwheel-Ø	B	120
Length	a	160
Height	b	200
Length	c	125
Weight	ca. kg	14.1
Kvs - Value, one side open	m³/h	13.0
Cv - Value, one side open	gal /min	15.0
Kvs - Valve, central position	m³/h	15.5
Cv - Valve, central position	gal /min	17.9

Dimensions in mm.

Changeover Valves

Type 06401 - Bellow Sealed Changeover Valve



Cryogenic Bellow Sealed Changeover Valves, stainless steel, PN63

for the installation of two safety valves,
with indicator and two test connections G 1/4,
"cleaned and degreased for oxygen service"

Part No. 06401.0150.9***


*** In- and outlet connections with locking sleeve, female thread or flanges on request, working pressure up to PN100

Part No. 06401.0250.9***

*** In- and outlet connections with locking sleeve, female thread or flanges on request, working pressure up to PN63

Available options - on request only:

- Changeover valves with pneumatic or electric actuator

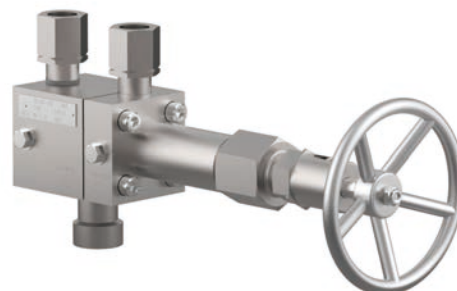


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +185°C / +365°F (458K)

Materials	DIN EN	ASTM
1 Body I	1.4571	A 276 Grade 316Ti
2 Body II	1.4571	A 276 Grade 316Ti
3 Bellow stem	1.4571	A 276 Grade 316Ti
4 Valve seal	PCTEF	
5 Disc	1.4571	A 276 Grade 316Ti
6 Bellow	1.4571	A 276 Grade 316Ti
7 Head piece I	1.4571	A 276 Grade 316Ti
8 Head piece II	1.4571	A 276 Grade 316Ti
9 Stem	CW452K	B 159 UNS C51900
10 O-Rings	FPM (VITON)	
11 Top ring	1.4571	A 276 Grade 316Ti
12 Handwheel	Aluminium alloy	
13 Welding piece	1.4571	A 276 Grade 316Ti
14 Locking sleeve	1.4571	A 276 Grade 316Ti
15 Thread connection	1.4571	A 276 Grade 316Ti
16 Flange	1.4571	A 276 Grade 316Ti

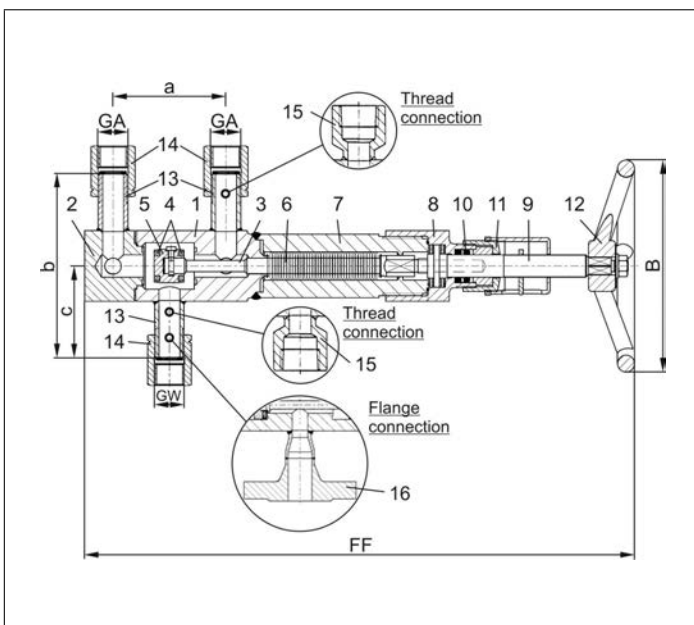

Typ 06401 - Standard design		Technical data		
Nominal size	DN	15	25	
Dimension code	.X.	0150	0250	
Inlet	GW	G 3/4	G 1	
Outlet	GA	G 3/4	G 1	
Face-to-face dimension	FF	390	390	
Handwheel-Ø	B	150	150	
Length	a	80	80	
Height	b	130	160	
Length	c	65	80	
Weight	ca. kg	8.0	9.9	
Kvs - Value, one side open	m³/h	9.5	13.0	
Cv - Value, one side open	gal /min	11.0	15.0	
Kvs - Value, central position	m³/h	13.5	15.5	
Cv - Value, central position	gal /min	15.6	17.9	

Dimensions in mm.

Changeover Valves

Type 06900 - Bursting disc brass



for Cryogenic Diverter Valves

burst pressure range: 4,0 bar (58.0 psi) - 52,0 bar (754.0 psi)

indicated burst pressure at burst temperature +20°C (68°F)

burst pressure tolerance: $\pm 5\%$

"cleaned and degreased for oxygen service"

Part No. 06900.0400.00XX.XX

male thread G1/2 acc. to ISO 228/1

Part No. 06900.0400.50XX.XX

male thread 1/2" NPT acc. to ANSI B 1.20.1

XX.XX = Code for burst pressure

Example:

burst pressure **5,20** bar - 06900.0400.00**05.20**

burst pressure **24,00** bar - 06900.0400.00**24.00**

Calculation bar in psi: 1,0 bar = 14,503 psi (7,20 bar = 104,4 psi)

Available options - on request only:

- other thread sizes
- other burst pressures

Working temperature: -196°C (77K) up to +120°C (393K)




Materials	DIN EN	ASTM
1 Body	CW614N	B 283 UNS C38500
2 Burst disc	1.4401	AISI 316
3 Ring	CW614N	B 283 UNS C38500

Part No. (G-thread)	Standard-burst pressures
06900.0400.0005.20	5.2 bar / 75.4 psi
06900.0400.0007.20	7.2 bar / 104.4 psi
06900.0400.0014.00	14.0 bar / 203.0 psi
06900.0400.0016.50	16.5 bar / 239.3 psi
06900.0400.0020.20	20.2 bar / 292.9 psi
06900.0400.0024.00	24.0 bar / 348.0 psi
06900.0400.0025.08	25.08 bar / 363.7 psi
06900.0400.0027.00	27.0 bar / 391.5 psi
06900.0400.0046.00	46.0 bar / 667.0 psi

Part No. (NPT-thread)	Standard-burst pressures
06900.0400.5005.20	5.2 bar / 75.4 psi
06900.0400.5007.20	7.2 bar / 104.4 psi
06900.0400.5014.00	14.0 bar / 203.0 psi
06900.0400.5017.00	17.0 bar / 246.5 psi
06900.0400.5020.20	20.2 bar / 292.2 psi
06900.0400.5024.00	24.0 bar / 348.0 psi
06900.0400.5027.00	27.0 bar / 391.5 psi
06900.0400.5032.00	32.0 bar / 464.1 psi
06900.0400.5046.00	46.0 bar / 667.0 psi

Type 06900	Technical data	
Nominal size	GW	1/2
Height G-Thread	H	33,0
Height NPT-Thread	H	37,5
Length G-Thread	L	15,5
Length NPT-Thread	L	20,0
Orifice	d ₀	13,0
Wrench size across flats	S	30
Weight	ca. kg	0,1
Kvs-Value	m ³ /h	11,0
Cv-Value	gal/min	13,1

Dimensions in mm.

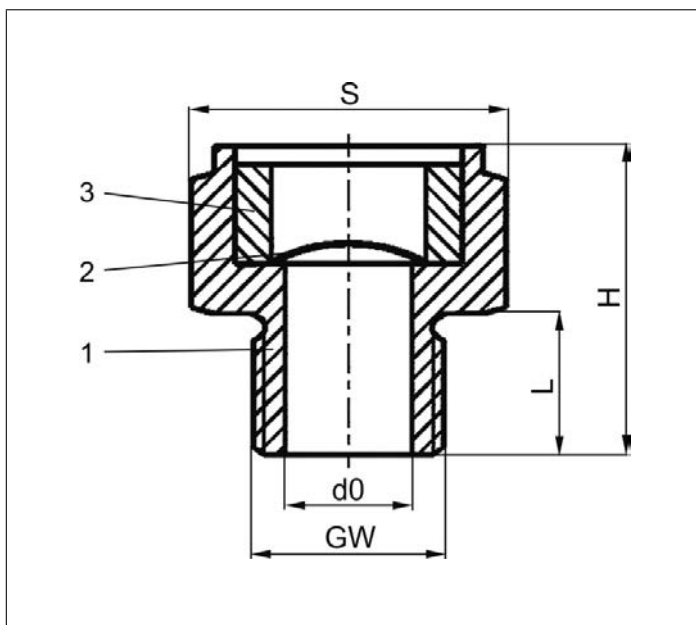

Changeover Valves

Type 06901 - Bursting disc stainless steel



for Cryogenic Diverter Valves

burst pressure range: 4,0 bar (58.0 psi) - 52,0 bar (754.0 psi)

indicated burst pressure at burst temperature +20°C (68°F)

burst pressure tolerance: $\pm 10\%$

"cleaned and degreased for oxygen service"

Part No. 06901.0400.00XX.XX

male thread G1/2 acc. to ISO 228/1

Part No. 06901.0400.50XX.XX

male thread 1/2" NPT acc. to ANSI B 1.20.1

XX.XX = Code for burst pressure

Example:

burst pressure **5,20** bar - 06901.0400.00**05.20**

burst pressure **46,00** bar - 06901.0400.00**46.00**

Calculation bar in psi: 1,0 bar = 14,503 psi (40,00 bar = 580,1 psi)

Available options - on request only:

- other thread sizes
- other burst pressures


Working temperature: -196°C (77K) up to +120°C (393K)



Materials	DIN EN	ASTM
1 Body	1.4404	A 276 Grade 316L
2 Burst disc	Nickel	Nickel
3 Ring	1.4404	A 276 Grade 316L

Part No. (G-thread)	Standard-burst pressures
06901.0400.0005.20	5.2 bar / 75.4 psi
06901.0400.0007.00	7.0 bar / 101.5 psi
06901.0400.0008.10	8.1 bar / 117.4 psi
06901.0400.0010.00	10.0 bar / 145.0 psi
06901.0400.0015.00	15.0 bar / 217.5 psi
06901.0400.0018.00	18.0 bar / 261.0 psi
06901.0400.0020.20	20.2 bar / 292.9 psi
06901.0400.0020.57	20.57 bar / 298.34 psi
06901.0400.0022.00	22.0 bar / 319.0 psi
06901.0400.0024.00	24.0 bar / 348.0 psi
06901.0400.0027.00	27.0 bar / 391.5 psi
06901.0400.0043.56	43.56 bar / 631.78 psi

Part No. (NPT-thread)	Standard-burst pressures
06901.0400.5027.00	27.0 bar / 391.5 psi

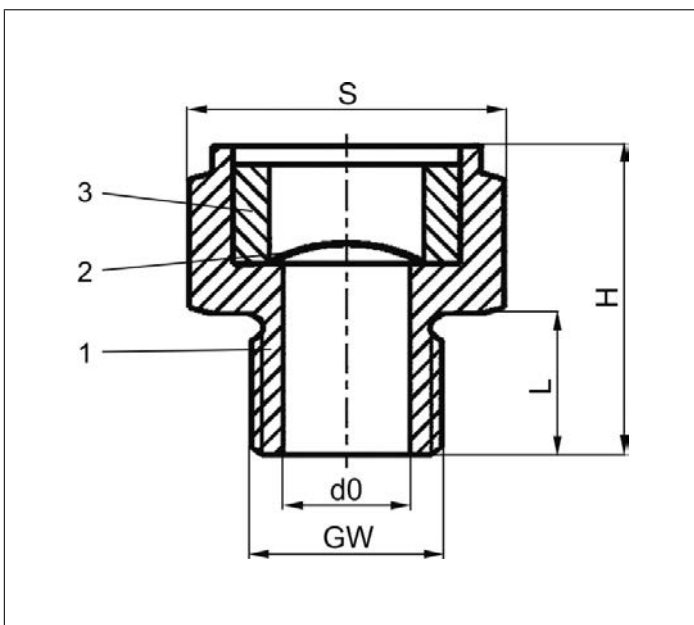

Type 06901	Technical data	
Nominal size	GW	1/2
Height G-Thread	H	34,0
Height NPT-Thread	H	38,5
Length G-Thread	L	15,5
Length NPT-Thread	L	20,0
Orifice	d ₀	13,0
Wrench size a/f up to 8,0 bar	S	46
Wrench size a/f from 8,01 bar	S	30
Weight	ca. kg	0,1
Kvs-Value	m ³ /h	11,0
Cv-Value	gal/min	13,1

Dimensions in mm.

Fire Safe and Offshore Applications



Offshore and LNG: The MS Stavangerfjord of the shipping company Fjord Line ferry runs between Norway and Denmark fuelled 100% with the environmentally friendly LNG. Equipped with HEROSE valves specifically for LNG use.

Fire Safe Valves

Type 01651 - Globe Valve

HEROSE



Cryogenic-Globe and Globe/Check Valves, PN50

"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork, "live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01651.X.000*

Part No. 01651.X.500* Globe/Check Valve

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01651.X.0004

Part No. 01651.X.5004 Globe/Check Valve

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Valve with control disc (tapered design)



Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

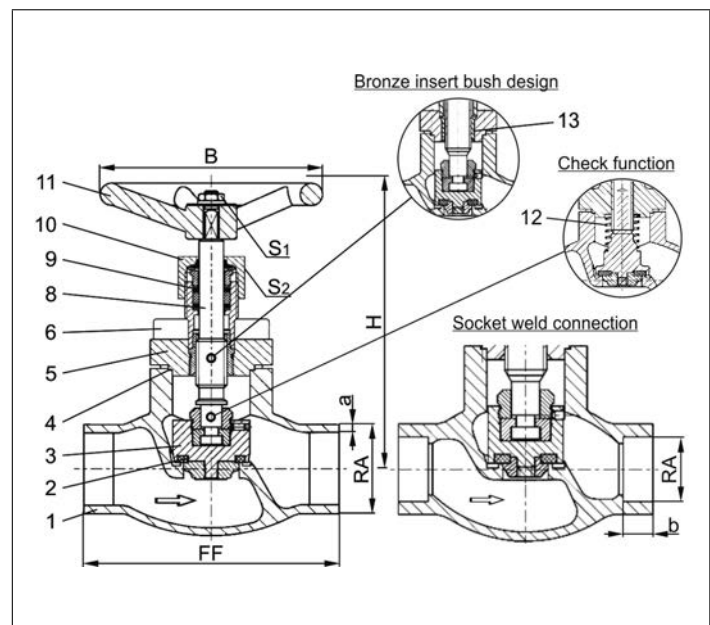

Type 01651 - Standard design	Technical data												
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280
Height	H	140	140	140	140	140	170	175	175	200	260	310	350
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33	73.03	88.90	114.3
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40											
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20
Handwheel-Ø	B	100	100	100	100	100	125	125	125	125	200	250	315
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10	10	10	10	12
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36	36	36	36	41
Weight	ca. kg	1.0	1.25	1.3	1.7	2.0	2.8	4.2	4.2	6.7	10.7	16.0	23.0
Kvs-Value	m ³ /h	1.6	3.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1	71.1	104.0	170.0
Cv-Value	gal/min	1.9	4.4	5.0	7.8	13.4	16.2	23.9	26.3	43.2	82.7	120.9	195.2

Dimensions in mm.

Fire Safe Valves

Type 01655 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, PN50

"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01655.X.0001

Part No. 01655.X.5001 Globe/Check Valve

Female thread connection (G) acc. to ISO 228/1

Part No. 01655.X.0006

Part No. 01655.X.5006 Globe/Check Valve

Female thread connection NPT acc. to ANSI B 1.20.1

Available options - on request only:

- Female thread connection (R) acc. to ISO 7-Rc
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

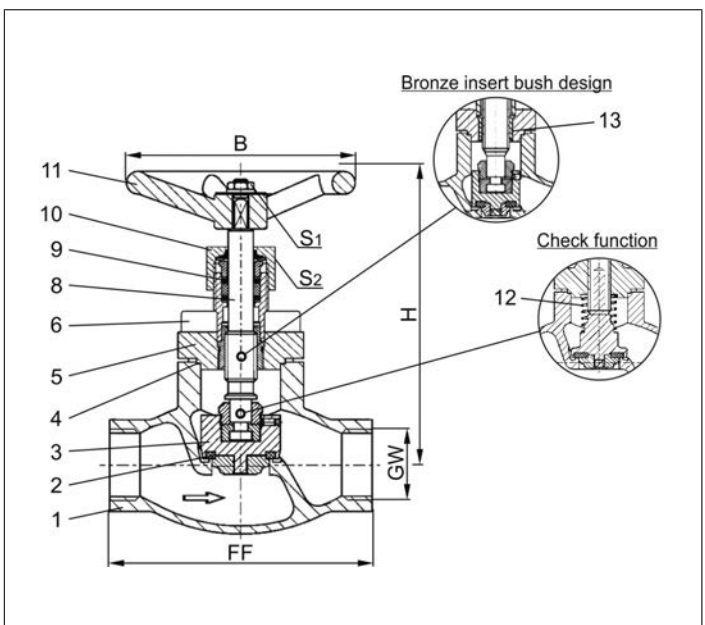

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 01655 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	40	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	70	70	85	100	115	130	130	155
Height	H	140	140	140	140	140	175	175	200
Handwheel-Ø	B	100	100	100	100	100	125	125	125
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36
Weight	ca. kg	1.0	1.0	1.3	1.7	2.0	4.2	4.2	6.7
Kvs-Value	m ³ /h	1.6	2.2	4.3	6.7	11.5	20.6	22.6	37.1
Cv-Value	gal/min	1.9	2.6	5.0	7.8	13.4	23.9	26.3	43.2

Dimensions in mm.



Fire Safe Valves

Type 03651 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, PN40
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 03651.X.0002

Part No. 03651.X.5002 Globe/Check Valve

Flanged connection acc. to DIN EN 1092-1 PN40

Available options - on request only:

- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

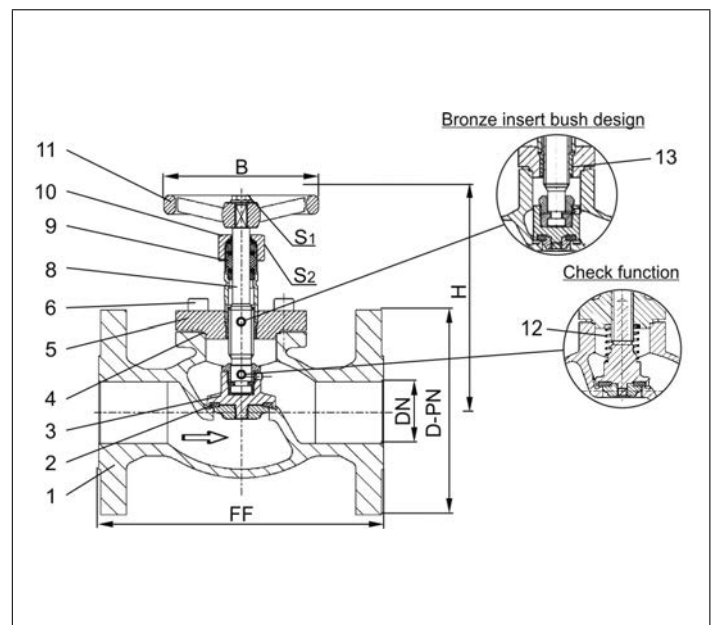

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03651 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	130	130	140	170	200	260	310	350	380
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	4.5	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Fire Safe Valves

Type 03651 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, class 300
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 03651.X.0003

Part No. 03651.X.5003 Globe/Check Valve

Flanged connection acc. to ANSI B16.5 class 300

Available options - on request only:

- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

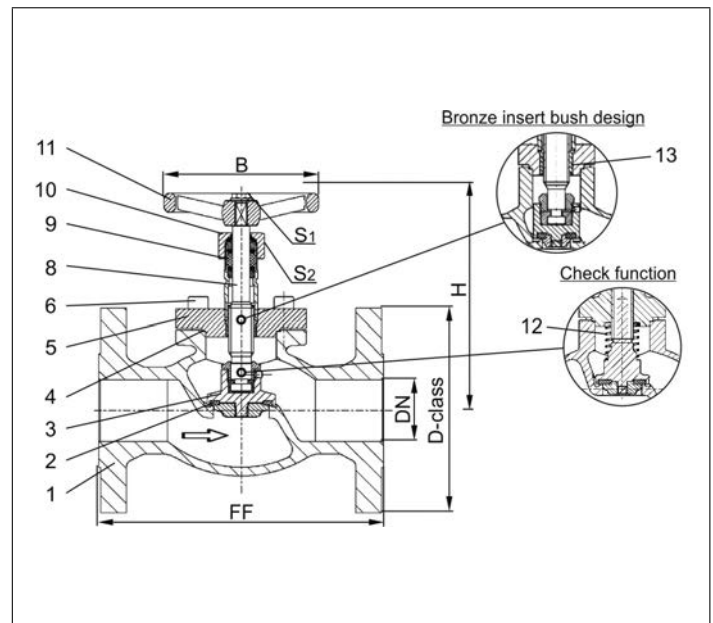

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03651 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	130	130	140	170	200	260	310	350	380
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	4.5	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.



Fire Safe Valves

Type 03651 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, class 150
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 03651.X.0001

Part No. 03651.X.5001 Globe/Check Valve

Flanged connection acc. to ANSI B16.5 class 150

Available options - on request only:

- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

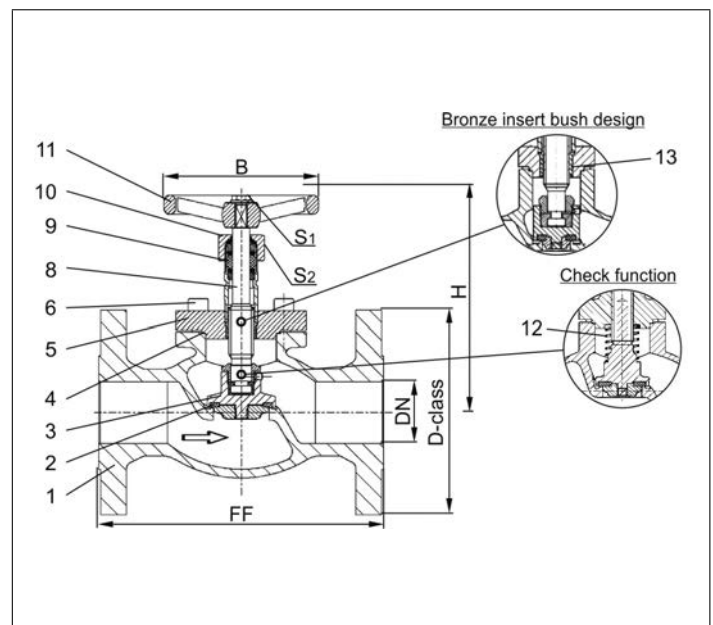

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03651 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	130	130	140	170	200	260	310	350	380
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	4.5	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN50 (DN150=PN40)

“Fire safe” type test approval acc. to EN ISO 10497

Stainless steel body and topwork, “live loaded” gland packing
“cleaned and degreased for oxygen service”

Part No. 01641.X.001* (H = 270mm)

Part No. 01641.X.002* (H = 370mm)

Part No. 01641.X.501* (H = 270mm) Globe/Check Valve

Part No. 01641.X.502* (H = 370mm) Globe/Check Valve

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01641.X.0014 (H = 270mm)

Part No. 01641.X.0024 (H = 370mm)

Part No. 01641.X.5014 (H = 270mm) Globe/Check Valve

Part No. 01641.X.5024 (H = 370mm) Globe/Check Valve

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Extension H up to 900mm
- Valve with control disc (tapered design)

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

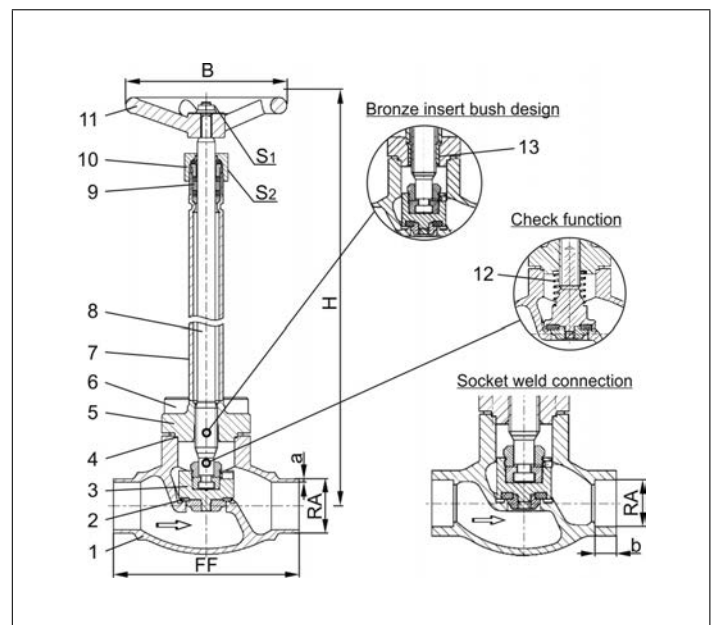

Type 01641 - Standard design	Technical data													
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100	150
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114	0168
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280	400
Height	H	270 mm or 370 mm												
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	-	42.4	48.3	60.3	76.1	88.9	114.3	168.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	-	2.0	2.0	2.0	2.6	3.2	6.0	7.11
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33	73.03	88.90	114.3	168.3
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40												
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20	20
Handwheel-Ø	B	100	100	100	100	100	-	125	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	7	7	-	10	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	30	30	-	36	36	36	36	36	41	41
Weight	ca. kg	1.4	1.65	1.7	2.1	2.4	-	4.7	4.7	7.2	12.7	17.0	24.5	54.0
Kvs-Value	m ³ /h	1.6	3.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	1.9	4.4	5.0	7.8	13.4	16.2	23.9	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.



Fire Safe Valves

Type 01641 - Globe Valve



Cryogenic Globe Valves, DN200, PN25

"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork

"live loaded" gland packing

Part No. 01641.0219.001* (H=560)

Part No. 01641.0219.006* (H=1000)

*Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01641.0219.00*4

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

In flow direction, the valve with the nominal size DN200 is conform to tightness class

L1 up to 9 bar maximum differential pressure acc. to DIN 12567 for LNG use.

This standard can also be used for the tightness class of other cryogenic gases.


Available options - on request only

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

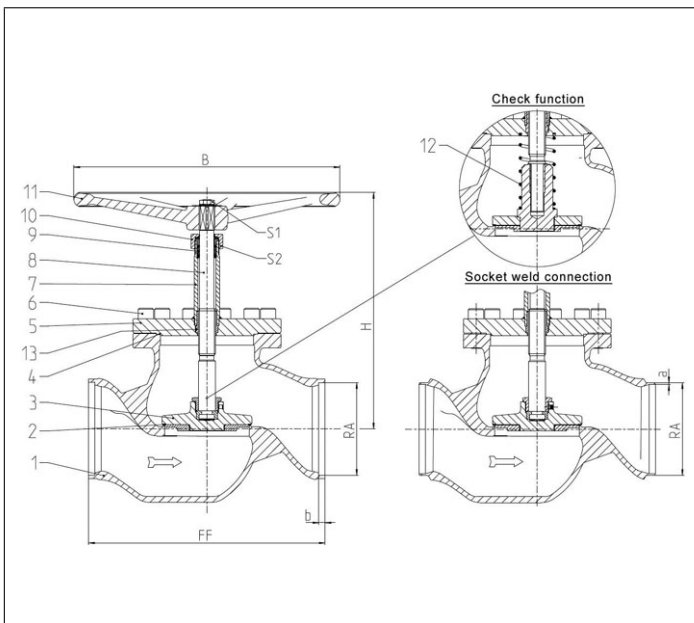

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 01641 - Standard design	Technical data	
Nominal size	DN	200
Dimension code	.X.	0219
Face-to-face dimension	FF	560
Height	H	560
Outside pipe-Ø ISO 1127	RA	219.1
Wall thickness pipe ISO 1127	a	6.3
Outside pipe-Ø ASTM A312	RA	219.1
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40
Socket depth	b	15
Handwheel-Ø	B	630
Wrench size across flats	S ₁	30
Wrench size across flats	S ₂	65
Weight	ca. kg	135
Kvs-Value	m ³ /h	680
Cv-Value	gal/min	786

Dimensions in mm.

Fire Safe Valves

Type 01645 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, PN50

"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork, "live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01645.X.0011 (H = 270mm)

Part No. 01645.X.0021 (H = 370mm)

Part No. 01645.X.5011 (H = 270mm) Globe/Check Valve

Part No. 01645.X.5021 (H = 370mm) Globe/Check Valve

Female thread connection (G) acc. to ISO 228/1

Part No. 01645.X.0016 (H = 270mm)

Part No. 01645.X.0026 (H = 370mm)

Part No. 01645.X.5016 (H = 270mm) Globe/Check Valve

Part No. 01645.X.5026 (H = 370mm) Globe/Check Valve

Female thread connection NPT acc. to ANSI B 1.20.1

Available options - on request only:

- Female thread connection (R) acc. to ISO 7-Rc
- Extension H up to 900mm
- Valve with control disc (tapered design)

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

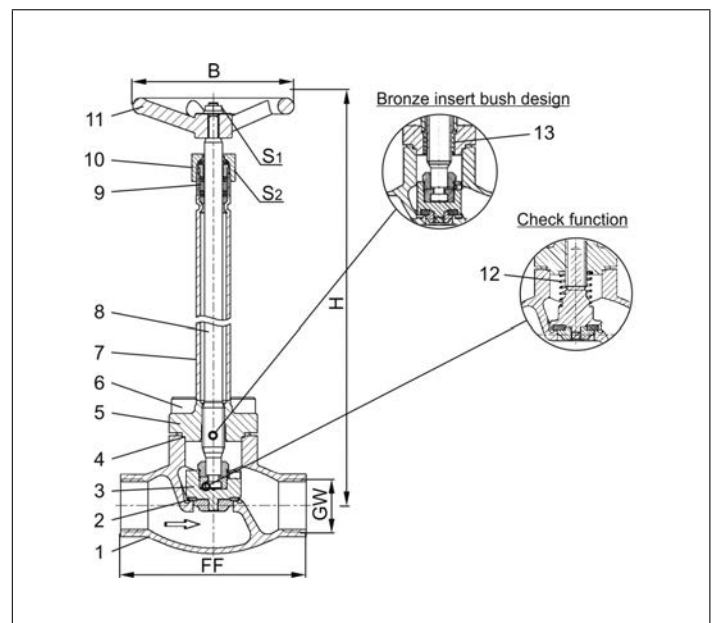

Type 01645 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	40	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	70	70	85	100	115	130	130	155
Height	H	270 mm or 370 mm							
Handwheel-Ø	B	100	100	100	100	100	125	125	125
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36
Weight	ca. kg	1.4	1.4	1.7	2.1	2.4	4.7	4.7	7.2
Kvs-Value	m ³ /h	1.6	2.2	4.3	6.7	11.5	20.6	22.6	37.1
Cv-Value	gal/min	1.9	2.6	5.0	7.8	13.4	23.9	26.3	43.2

Dimensions in mm.



Fire Safe Valves

Type 03641 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, PN40

"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03641.X.0012 (H = 270mm)

Part No. 03641.X.0022 (H = 370mm)

Part No. 03641.X.5012 (H = 270mm) Globe/Check Valve

Part No. 03641.X.5022 (H = 370mm) Globe/Check Valve

Flanged connection acc. to DIN EN 1092-1 PN40

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

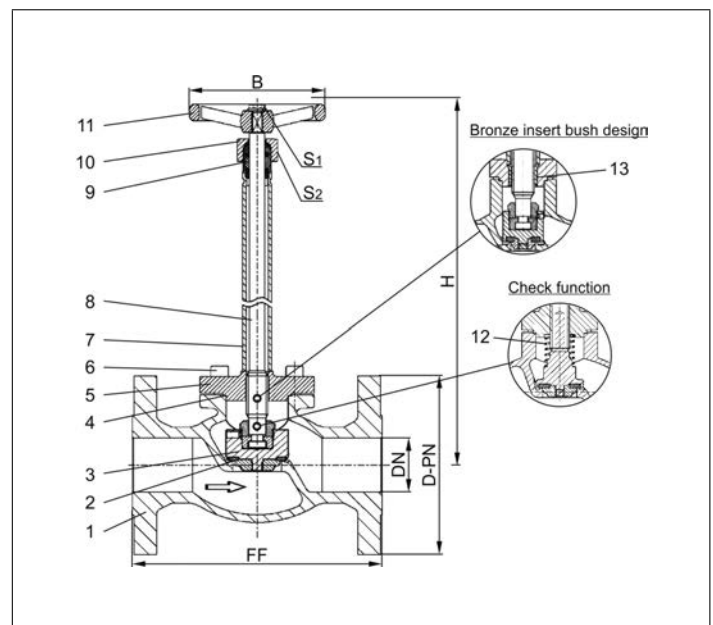

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03641 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	270 mm or 370 mm							370	420
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	5.0	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Fire Safe Valves

Type 03641 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, class 300
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 03641.X.0013 (H = 270mm)

Part No. 03641.X.0023 (H = 370mm)

Part No. 03641.X.5013 (H = 270mm) Globe/Check Valve

Part No. 03641.X.5023 (H = 370mm) Globe/Check Valve

Flanged connection acc. to ANSI B16.5 class 300

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

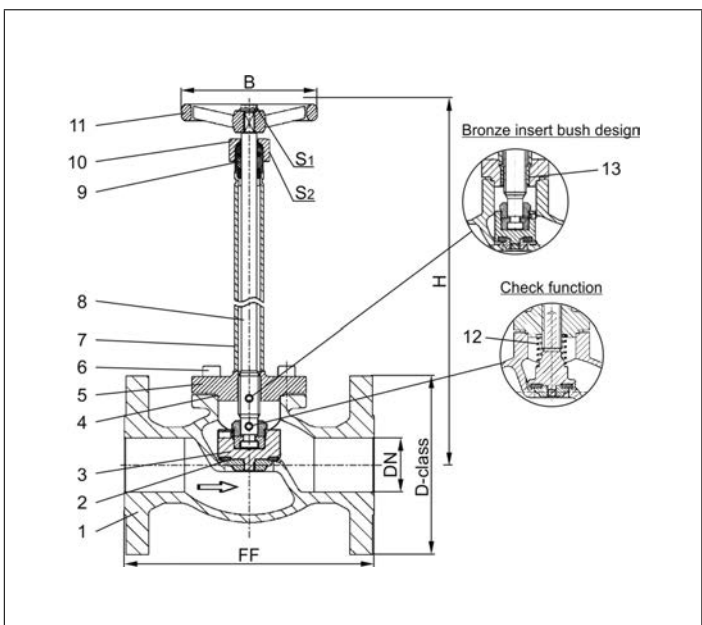

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03641 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	270 mm or 370 mm							370	420
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	5.0	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.



Fire Safe Valves

Type 03641 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, class 150
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 03641.X.0011 (H = 270mm)

Part No. 03641.X.0021 (H = 370mm)

Part No. 03641.X.5011 (H = 270mm) Globe/Check Valve

Part No. 03641.X.5021 (H = 370mm) Globe/Check Valve

Flanged connection acc. to ANSI B16.5 class 150

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

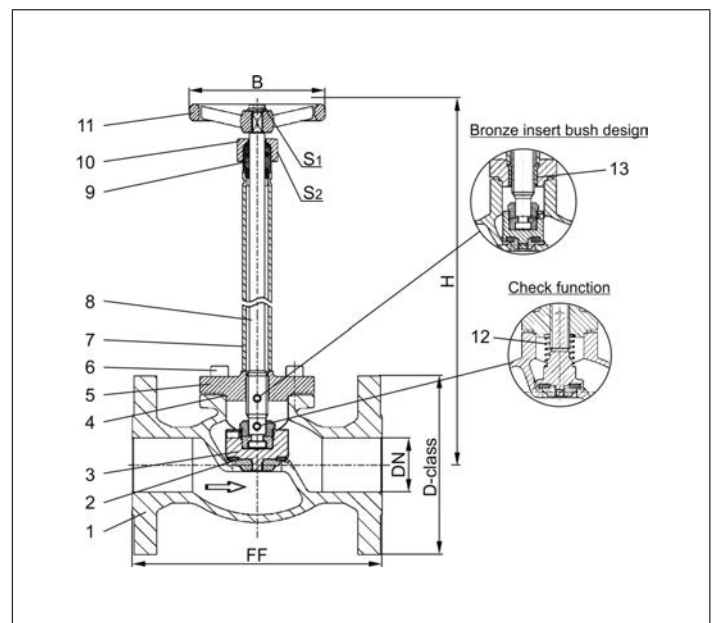

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03641 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	270 mm or 370 mm							370	420
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	5.0	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm.

Fire Safe Valves

Type 03641 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, class 150
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
 "live loaded" gland packing

Part No. 03641.8000.0011 (H=560)

Flanged connection acc. to ANSI B16.5 class 150

In flow direction, the valve with the nominal size DN200 is conform to tightness class L1 up to 12 bar maximum differential pressure acc. to DIN 12567 for LNG use.
 This standard can also be used for the tightness class of other cryogenic gases.

Available options - on request only




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
1a Flange	1.4301	A 276 Grade 304
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	1.4571	A 313 Grade 316Ti
12 Spring	1.4310	A 313 Grade 301
13 Bush	CW452K	B 159 UNS C51900

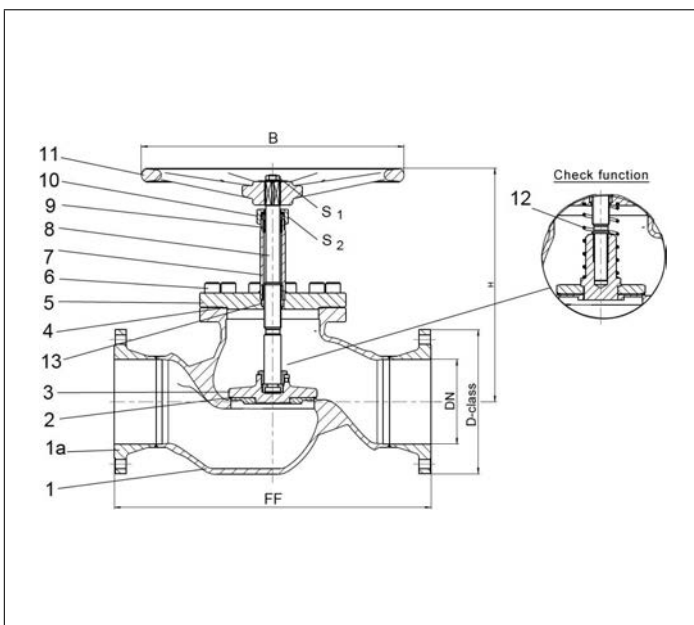

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03641 - Standard design	Technical data	
Nominal size	DN	200
Dimension code	.X.	8000
Flange-Ø	D-class	345
Face-to-face dimension	FF	760
Height	H	560
Handwheel-Ø	B	630
Wrench size across flats	S ₁	30
Wrench size across flats	S ₂	65
Weight	ca. kg	135
Kvs-Value	m ³ /h	680
Cv-Value	gal/min	786

Dimensions in mm.



Fire Safe Valves

Type 01262 - Bellow Sealed Globe Valve



"Fire Safe"-design without fire type-testing according to EN ISO 10497

Cryogenic-Bellow Sealed Globe Valve, PN50

Stainless steel body and topwork,

"live loaded" gland packing

"cleaned and degreased for oxygen service"

Part No. 01262.X.002*

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01262.X.0024

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Extension H up to 900mm

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Leak rate: 10^{-6} mbar ltr / sec outside, 10^{-4} mbar ltr / sec seat



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301	A 276 Grade 304
6 Bellow stem	1.4571	A 313 Grade 316Ti
7 Bolts	1.4301/A2	A 194 B8
8 Bellow	1.4571	A 313 Grade 316Ti
9 Elongation tube	1.4541	A 213 TP 321
10 Headpiece	1.4301	A 276 Grade 304
11 Bush	CW452K	B 159 UNS C51900
12 Stem	1.4301	A 276 Grade 304
13 Gland packing	Graphite / PTFE	
14 Gland nut	1.4305	A 276 Grade 303
15 Handwheel	1.4409	A 351 CF3M

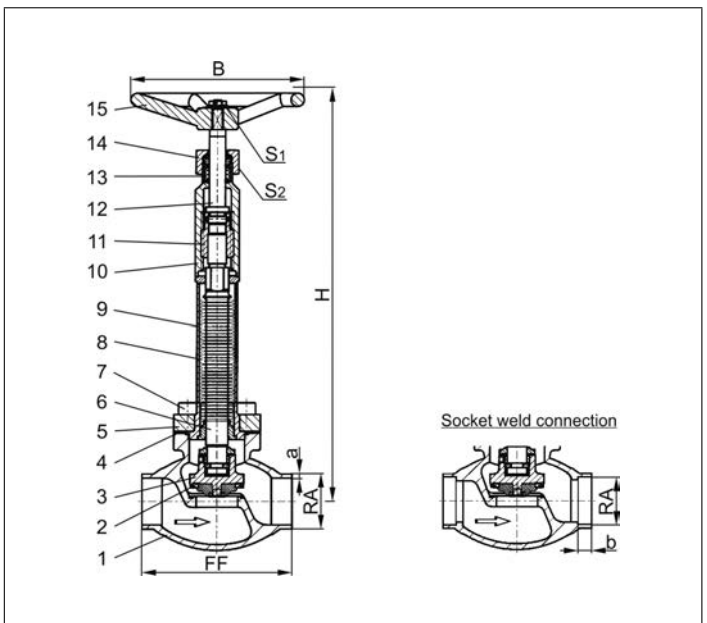

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 01262 - Standard design		Technical data								
Nominal size	DN	10	15	15	20	25	32	40	40	50
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155
Height	H	380	380	380	380	380	380	380	380	380
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40								
Socket depth	b	6	10	10	13	13	-	13	13	16
Handwheel-Ø	B	150	150	150	150	150	150	150	150	150
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36	36
Weight	ca. kg	1.6	1.85	1.9	2.3	2.7	3.6	5.1	5.1	7.7
Kvs-Value	m ³ /h	1.6	2.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1
Cv-Value	gal/min	1.9	3.3	5.0	7.8	13.4	16.2	26.3	26.3	43.2

Dimensions in mm.

Fire Safe Valves

Type 1116F - Globe Valve



Cryogenic-Globe Valves, PN50

"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
Inner parts made of stainless steel
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Available options - on request only:


- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Extension H up to 900mm
- Valve with control disc (tapered design)
- Disc with PTFE/Carbon filled (25%) seal
- Further connection types



Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)
Recommended working temperature (for versions without extension):
-60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 479 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4308	A 351 CF8
6 Bolts	1.4301/A2	A 320 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 479 Grade 304
9 Gland packing	Graphite / PTFE	
10 Gland nut	1.4305	A 276 Grade 303
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4310	A 276 Grade 301
13 Bush	1.4541	A 479 Grade 321
14 Sleeve	1.4571	A 276 Grade 316Ti

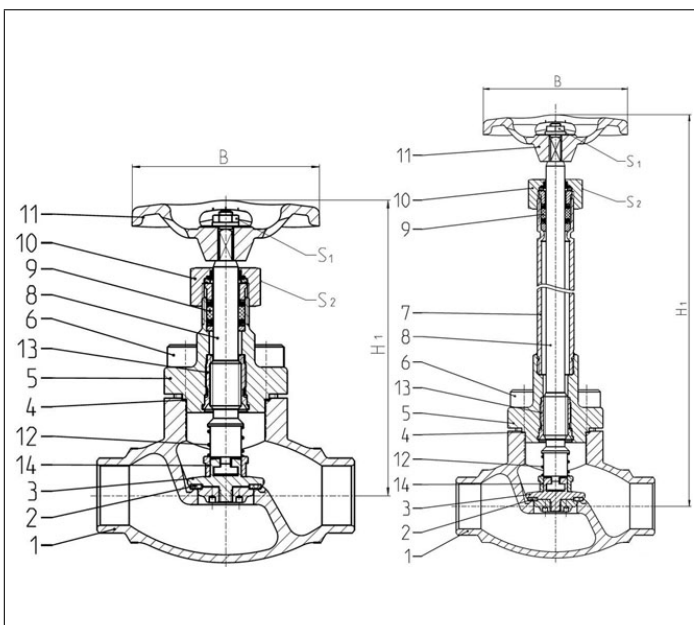


Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Technical Data - Standard design

Nominal size [DN]	Height (H) [mm]	Height (H ₁) [mm]	Handwheel-Ø (B) [mm]	Wrench size across flats (S ₁) [mm]	Wrench size across flats (S ₂) [mm]
10	140	270/370	100	7	27
15	140	270/370	100	7	27
20	140	270/370	100	7	27
25	140	270/370	100	7	27
40	175	270/370	125	10	32
50	200	270/370	125	10	32



Butt weld connection acc. to


· ISO 1127

DN	Face-to-face dim. (FF) [mm]	Outside pipe-Ø (RA) [mm]	ISO Wall thickness pipe ISO (a) [mm]	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.e.* [kg]	Part No.
10	70	13.5	2.3	1.6	1.9	0.85	1116F0135023.X0
15	85	17.2	1.6	3.8	4.4	0.96	1116F0172016.X0
15	85	21.3	2.0	4.3	5.0	0.98	1116F0213020.X0
20	100	26.9	2.0	6.7	7.8	1.43	1116F0269020.X0
25	115	33.7	2.6	11.5	13.4	1.92	1116F0337026.X0
40	130	42.4	2.6	20.6	23.9	3.49	1116F0424026.X0
40	130	48.3	2.6	22.6	26.3	3.36	1116F0483026.X0
50	155	60.3	2.6	37.1	43.2	4.94	1116F0603026.X0

Butt weld connection acc. to

· ASTM A312

DN	Face-to-face dim. (FF) [mm]	Outside pipe-Ø (RA) [mm]	ASTM Wall thickness pipe ASTM (a) [mm]	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.e.* [kg]	Part No.
10	70	13.7	2.3	1.6	1.9	0.85	1116F0137S40.X0
15	85	17.1	1.6	3.8	4.4	0.96	1116F0171S10.X0
15	85	21.3	2.1	4.3	5.0	0.98	1116F0213S10.X0
20	100	26.6	2.1	6.7	7.8	1.43	1116F0266S10.X0
25	115	33.4	2.7	11.5	13.4	1.92	1116F0334S10.X0
40	130	42.4	2.7	20.6	23.9	3.49	1116F0424S10.X0
40	130	48.2	2.7	22.6	26.3	3.36	1116F0482S10.X0
50	155	60.3	2.7	37.1	43.2	4.94	1116F0603S10.X0



Socket weld connection acc. to

· ISO 1127

· ASTM A312


DN	Face-to-face dim. (FF) [mm]	Socket depth (b) [mm]	Socket diameter (B) [mm]	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.e.* [kg]	Part No.
10	70	6.0	14.1	1.6	1.9	0.85	1116F0141000.X0
15	85	8.0	17.5	3.8	4.4	0.96	1116F0175000.X0
15	85	10.0	21.5	4.3	5.0	0.98	1116F0215000.X0
20	100	13.0	27.5	6.7	7.8	1.43	1116F0275000.X0
25	115	13.0	34.1	11.5	13.4	1.92	1116F0341000.X0
40	130	13.0	42.8	20.6	23.9	3.49	1116F0428000.X0
40	130	13.0	48.65	22.6	26.3	3.36	1116F0486000.X0
50	155	16.0	61.1	37.1	43.2	4.94	1116F0611000.X0

* w.e. = without extension

X = 0 (without extension), 1 (with 270mm extension), 2 (with 370mm extension)



Connection types




Flanged connection acc. to

- DIN EN 1092-1 PN40
- ANSI B16.5 class 300

DN / NPS	Face-to-face dim. (FF) [mm]	Flange-Ø (D-PN) [mm]	Flange-Ø (D-class) [mm]	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.e.* [kg]	Part No. DIN EN	Part No. ANSI
15 / 1/2"	161	95	95	4.3	5.0	2.86	1116F015P040.X0	1116F015C300.X0
20 / 3/4"	181	105	115	6.7	7.8	3.72	1116F020P040.X0	1116F020C300.X0
25 / 1"	160	115	125	11.5	13.4	4.60	1116F025P040.X0	1116F025C300.X0
40 / 1-1/2"	200	150	155	22.6	26.3	8.62	1116F040P040.X0	1116F040C300.X0
50 / 2"	230	165	165	37.1	43.2	12.48	1116F050P040.X0	1116F050C300.X0

** welded version



Female thread connection acc. to

- ISO 228/1 (G)
- NPT acc. to ANSI B 1.20.1 (NPT)

DN	Face-to-face dim. (FF) [mm]	Thread size (GW)	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.e.* [kg]	Part No. G-thread	Part No. NPT-thread
10	70	1/4"	1.6	1.9	0.85	1116FFG02000.X0	1116FFN02000.X0
10	70	3/8"	2.2	2.6	0.85	1116FFG03000.X0	1116FFN03000.X0
15	85	1/2"	4.3	5.0	0.98	1116FFG04000.X0	1116FFN04000.X0
20	100	3/4"	6.7	7.8	1.43	1116FFG06000.X0	1116FFN06000.X0
25	115	1"	11.5	13.4	1.92	1116FFG10000.X0	1116FFN10000.X0
40	130	1-1/4"	20.6	23.9	3.49	1116FFG12000.X0	1116FFN12000.X0
40	130	1-1/2"	22.6	26.3	3.36	1116FFG14000.X0	1116FFN14000.X0
50	155	2"	37.1	43.2	4.94	1116FFG20000.X0	1116FFN20000.X0

Female thread connection acc. to

- ISO 7-1 (Rc or Rp)

DN	Face-to-face dim. (FF) [mm]	Thread size (GW)	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.e.* [kg]	Part No. Rc-thread	Part No. Rp-thread
10	70	1/4"	1.6	1.9	0.85	1116FFR02000.X0	1116FFP02000.X0
10	70	3/8"	2.2	2.6	0.85	1116FFR03000.X0	1116FFP03000.X0
15	85	1/2"	4.3	5.0	0.98	1116FFR04000.X0	1116FFP04000.X0
20	100	3/4"	6.7	7.8	1.43	1116FFR06000.X0	1116FFP06000.X0
25	115	1"	11.5	13.4	1.92	1116FFR10000.X0	1116FFP10000.X0
40	130	1-1/4"	20.6	23.9	3.49	1116FFR12000.X0	1116FFP12000.X0
40	130	1-1/2"	22.6	26.3	3.36	1116FFR14000.X0	1116FFP14000.X0
50	155	2"	37.1	43.2	4.94	1116FFR20000.X0	1116FFP20000.X0

* w.e. = without extension

X = 0 (without extension), 1 (with 270mm extension), 2 (with 370mm extension)

Fire Safe Valves

Type 01643 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN50 (DN150=PN40)

"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork

Actuator - air opens, spring closes

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 01643.X.*01*

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01643.X.*014

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available accessories:

- Solenoid valve · Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Actuator "cleaned and degreased for oxygen service"

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

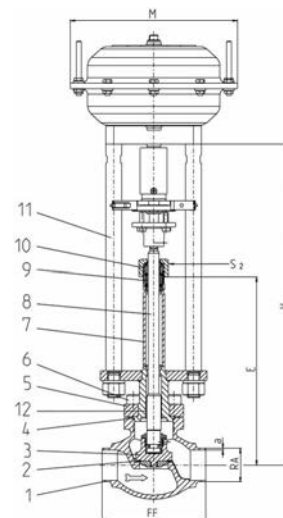

Type 01643 - Standard design	Technical data														
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100	150	
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114	0168	
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280	400	
Height	H	370	370	370	370	375	405	420	420	425	510	575	635	685	
Length	E	195	195	195	200	200	230	230	230	235	300	300	300	300	
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3	168.3	
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0	7.1	
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33	73.03	88.90	114.3	168.3	
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40													
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20	20	
Actuator-Ø	M	dependent on actuator													
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36	36	36	36	41	41	
Weight w/o actuator	ca. kg	1.9	2.15	2.2	2.4	3.1	3.8	6.5	6.5	9.0	15.2	20.0	28.0	60.9	
Kvs-Value	m ³ /h	1.6	3.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1	71.1	104.0	170.0	350.0	
Cv-Value	gal/min	1.9	4.4	5.0	7.8	13.4	16.2	23.9	26.3	43.2	82.7	120.9	195.2	401.8	
Stroke	mm	10	10	10	7	9	9	11	11	15	23	23	30	40	

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Fire Safe Valves

Type 01643 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN50 (DN150=PN40)

"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the standard actuator is not cleaned and degreased for oxygen

Part No. 01643.X.0010

possible connections:

- Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312
- Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312
- Female thread connection (G) acc. to ISO 228/1 or NPT acc. to ANSI B 1.20.1

Please specify the required connection when ordering!

Available options - on request only:

- Solenoid valves · Electropneumatic positioner · Inductive Proximity Switches
- Position and Limit Switches · Air control sets · Electric actuator
- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Actuator "cleaned and degreased for oxygen service" · Further pipe wall thicknesses
- Valve with check disc · valve with control disc (tapered design)

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet Gasket	Graphite	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

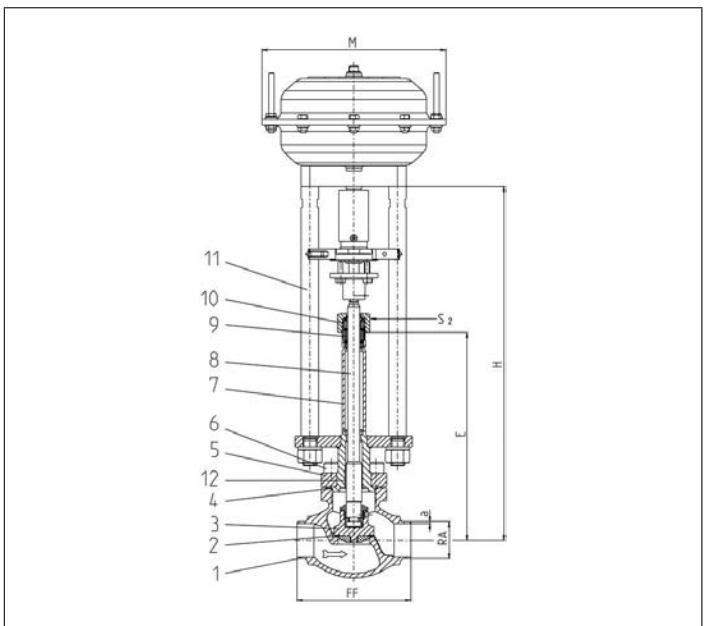


Type 01643 - Standard design	Technical Data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Face-to-face dimension	FF	70	85	100	115	115	130	155	205	245	280	400
Height	H	370	370	370	375	405	420	425	510	575	635	685
Length	E	195	195	200	200	230	230	235	300	300	300	350
Actuator-Ø	M	dependent on actuator										
Wrench size across flats	S ₂	30	30	30	30	36	36	36	36	36	41	41
Weight w/o actuator	ca. kg	1.9	2.15	2.4	3.1	3.8	6.5	9.0	15.2	20.0	28.0	60.9
Stroke	mm	10	10	7	9	9	11	15	23	23	30	40

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.





Connection types



Butt weld connection acc. to

· ISO 1127

DN	Face-to-face dim. (FF) [mm]	Outside pipe-Ø ISO (RA) [mm]	Wall thickness pipe ISO (a) [mm]	Kvs-value [m³/h]	Cv-value [gal/min]	Weight w.a.* [kg]	Order reference
10	70	13.5	1.0	1.6	1.9	1.9	BW 13.5x1.0
15	85	17.2	1.6	3.8	4.4	2.2	BW 17.2x1.6
15	85	21.3	2.0	4.3	5.0	2.2	BW 21.3x2.0
20	100	26.9	2.0	6.7	7.8	2.4	BW 26.9x2.0
25	115	33.7	2.0	11.5	13.4	3.1	BW 33.7x2.0
32	115	38.0	2.0	14.0	16.2	3.8	BW 38.0x2.0
40	130	42.4	2.0	20.6	23.9	6.5	BW 42.4x2.0
40	130	48.3	2.0	22.6	26.3	6.5	BW 48.3x2.0
50	155	60.3	2.0	37.1	43.2	9.0	BW 60.3x2.0
65	205	76.1	2.6	71.1	82.7	15.2	BW 76.1x2.6
80	245	88.9	3.2	104.0	120.9	20.0	BW 88.9x3.2
100	280	114.3	6.0	170.0	195.2	28.0	BW 114.3x6.0
150	400	168.3	7.1	350.0	401.8	60.9	BW 168.3x7.1

Butt weld connection acc. to

· ASTM A312

DN	Face-to-face dim. (FF) [mm]	Outside pipe-Ø ASTM (RA) [inch / mm]	Wall thickness pipe ASTM (a) [mm]	Kvs-value [m³/h]	Cv-value [gal/min]	Weight w.a.* [kg]	Order reference
10	70	1/4" / 13.72	1.65	1.6	1.9	1.9	BW 13.72x1.65
15	85	1/2" / 17.15	1.65	3.8	4.4	2.2	BW 17.15x1.65
15	85	1/2" / 21.34	2.11	4.3	5.0	2.2	BW 21.34x2.11
20	100	3/4" / 26.67	2.11	6.7	7.8	2.4	BW 26.67x2.11
25	115	1" / 33.40	2.77	11.5	13.4	3.1	BW 33.40x2.77
40	130	1-1/2" / 42.16	2.77	20.6	23.9	6.5	BW 42.16x2.77
40	130	1-1/2" / 48.26	2.77	22.6	26.3	6.5	BW 48.26x2.77
50	155	2" / 60.32	2.77	37.1	43.2	9.0	BW 60.32x2.77
65	205	2-1/2" / 73.02	3.05	71.1	82.7	15.2	BW 73.02x3.05
80	245	3" / 88.90	3.05	104.0	120.9	20.0	BW 88.90x3.05
100	280	4" / 114.30	3.05	170.0	195.2	28.0	BW 114.30x3.05
150	400	6" / 168.27	3.40	350.0	401.8	60.9	BW 168.27x3.40
10	70	1/4" / 13.72	2.24	1.6	1.9	1.9	BW 13.72x2.24
15	85	1/2" / 17.15	2.31	3.8	4.4	2.2	BW 17.15x2.31
15	85	1/2" / 21.34	2.77	4.3	5.0	2.2	BW 21.34x2.77
20	100	3/4" / 26.67	2.87	6.7	7.8	2.4	BW 26.67x2.87
25	115	1" / 33.40	3.38	11.5	13.4	3.1	BW 33.40x3.38
40	130	1-1/2" / 42.16	3.56	20.6	23.9	6.5	BW 42.16x3.56
40	130	1-1/2" / 48.26	3.68	22.6	26.3	6.5	BW 48.26x3.68
50	155	2" / 60.32	3.91	37.1	43.2	9.0	BW 60.32x3.91
65	205	2-1/2" / 73.02	5.16	71.1	82.7	15.2	BW 73.02x5.16
80	245	3" / 88.90	5.49	104.0	120.9	20.0	BW 88.90x5.49
100	280	4" / 114.30	6.02	170.0	195.2	28.0	BW 114.30x6.02
150	400	6" / 168.27	7.11	350.0	401.8	60.9	BW 168.27x7.11


w.a.* = without actuator




Connection types

Socket weld connection acc. to

- ISO 1127
- ASTM A312



DN	Face-to-face dim. (FF) [mm]	Socket depth (b) [mm]	Socket diameter (B) [mm]	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.a.* [kg]	order reference [ØISO / ØASTM]
10	70	6	14.1	1.6	1.9	1.9	SW 13.5 / 13.72
15	85	10	17.5	3.8	4.4	2.2	SW 17.2 / 17.15
15	85	10	21.5	4.3	5.0	2.2	SW 21.3 / 21.34
20	100	13	27.5	6.7	7.8	2.4	SW 26.9 / 26.67
25	115	13	34.1	11.5	13.4	3.1	SW 33.7 / 33.4
40	130	13	42.8	20.6	23.9	6.5	SW 42.4 / 42.16
40	130	13	48.6	22.6	26.3	6.5	SW 48.3 / 48.26
50	155	16	61.1	37.1	43.2	9.0	SW 60.3 / 60.32
65	205	16	74.0	71.1	82.7	15.1	SW 73.02
65	205	16	76.8	71.1	82.7	15.2	SW 76.1
80	245	16	90.0	104.0	120.9	20.0	SW 88.9
100	280	20	114.8	170.0	195.2	28.0	SW 114.3
150	400	20	168.2	350.0	401.8	60.9	SW 168.3 / 168.27



Female thread connection acc. to

- ISO 228/1 (G)
- NPT acc. to ANSI B 1.20.1 (NPT)

DN	Face-to-face dim. (FF) [mm]	Thread size (GW)	Kvs-value [m³/h]	Cv-value [gal/min]	Weight, w.a.* [kg]	order reference G-Thread	order reference NPT-Thread
10	70	1/4"	1.6	1.9	1.9	1/4 BSPP	1/4" NPT
10	70	3/8"	2.2	2.6	1.9	3/8 BSPP	3/8" NPT
15	85	1/2"	4.3	5.0	2.2	1/2 BSPP	1/2" NPT
20	100	3/4"	6.7	7.8	2.4	3/4 BSPP	3/4" NPT
25	115	1"	11.5	13.4	3.1	1 BSPP	1" NPT
40	130	1-1/4"	20.6	23.9	6.5	1-1/4 BSPP	1-1/4" NPT
40	130	1-1/2"	22.6	26.3	6.5	1-1/2 BSPP	1-1/2" NPT
50	155	2"	37.1	43.2	9.0	2 BSPP	2" NPT

w.a.* = without actuator

Fire Safe Valves

Type 01643 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN25
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork
 Actuator - air opens, spring closes or contrary
 "live loaded" gland packing

Part No. 01643.0219.*01*

Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01643.0219.*014

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

In flow direction, the valve with the nominal size DN200 is conform to tightness class L1 up to 18 bar maximum differential pressure acc. to DIN 12567 for LNG use.
 This standard can also be used for the tightness class of other cryogenic gases.

Available accessories/options - on request only:

- Solenoid valve · Limit switch · Electropneumatic positioner etc.
- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312
- Actuator "cleaned and degreased for oxygen service"
- Valve with check or control disc (tapered design)


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
 Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

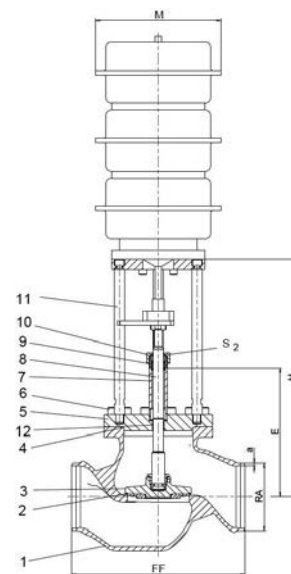

Type 01643 - Standard design	Technical data	
Nominal size	DN	200
Face-to-face dimension	FF	560
Height	H	785
Length	E	410
Outside pipe-Ø ISO 1127	RA	219.1
Wall thickness pipe ISO 1127	a	6.3
Outside pipe-Ø ASTM A312	RA	219.1
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40
Socket depth	b	15
Actuator-Ø	M	depent on actuator
Wrench size across flats	S ₂	65
Weight w/o actuator	ca. kg	165.0
Kvs-Value	m ³ /h	680.0
Cv-Value	gal/min	786.0
Stroke	mm	60

Dimensions in mm.

Fire Safe Valves

Type 03643 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN16
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03643.X.*014

Flanged connection acc. to DIN EN 1092-1 PN16

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

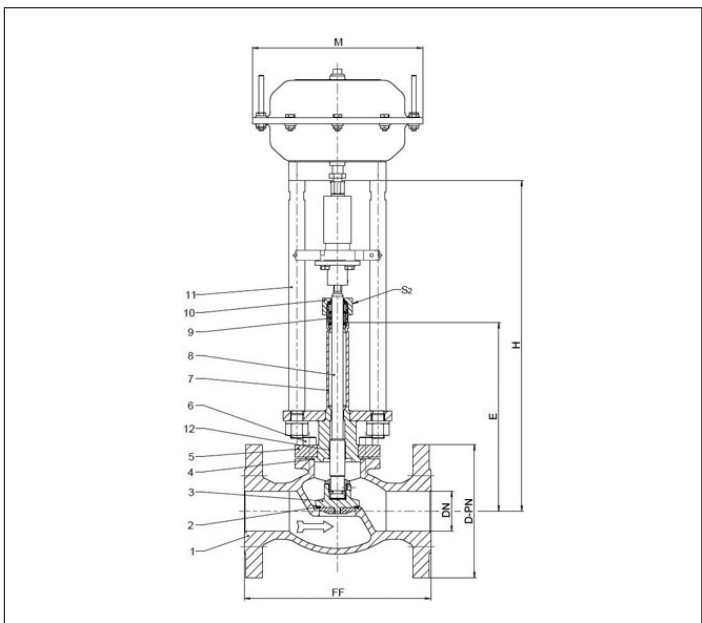

Type 03643 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN16	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	220	285
Face-to-face dimension	FF	140	150	160	200	230	295	310	350	510
Height	H	370	370	375	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	350
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	87.0
Kvs - Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv - Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	40

Dimensions in mm.



Fire Safe Valves

Type 03643 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN40
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03643.X.*012

Flanged connection acc. to DIN EN 1092-1 PN40

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

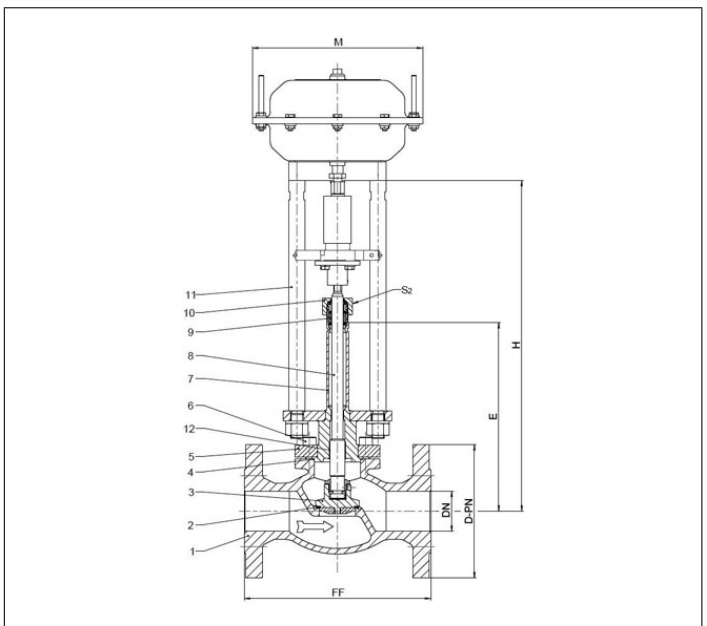

Type 03643 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	370	370	375	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	350
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	100.0
Kvs - Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv - Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	40

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Fire Safe Valves

Type 03643 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, class 300
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03643.X.*013

Flanged connection acc. to ANSI B16.5 class 300

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

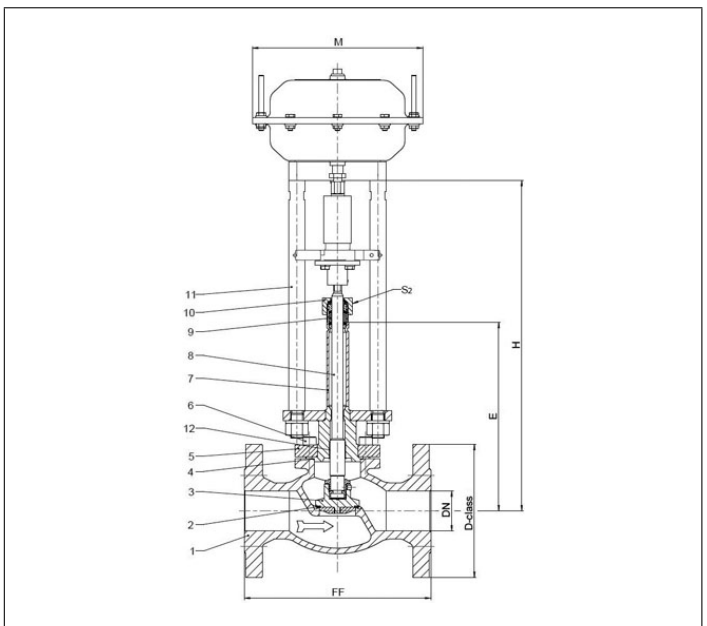

Type 03643 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	370	370	375	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	300
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	100.0
Kvs - Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv - Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	40

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.



Fire Safe Valves

Type 03643 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, class 150
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03643.X.*011

Flanged connection acc. to ANSI B16.5 class 150

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

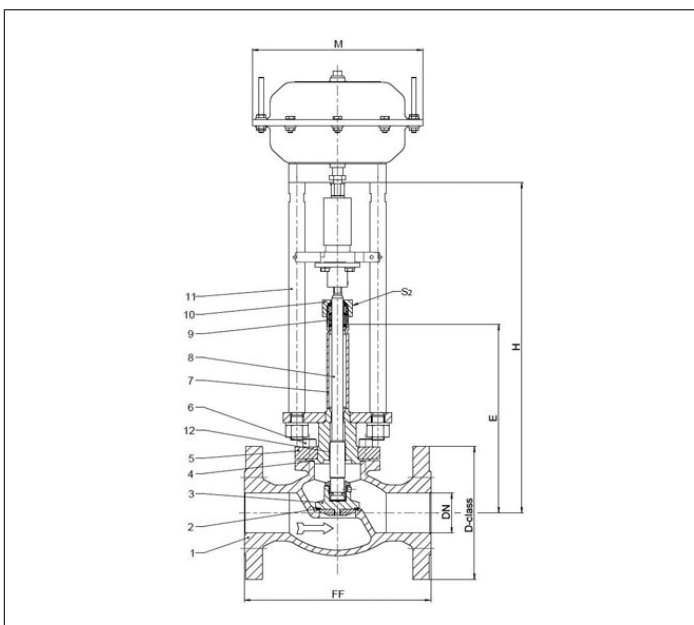

Type 03643 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	370	370	375	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	300
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	87.0
Kvs - Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv - Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	40

Dimensions in mm.

Fire Safe Valves

Type 03643 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN25
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork
 Actuator - air opens, spring closes or contrary
 "live loaded" gland packing

Artikel-Nr. 03643.8000.X

Flanschanschluss nach ANSI B16.5 class 150

In flow direction, the valve with the nominal size DN200 is conform to tightness class L1 up to 18 bar maximum differential pressure acc. to DIN 12567 for LNG use.
 This standard can also be used for the tightness class of other cryogenic gases.

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check or control disc (tapered design)


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
 Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
1a Flange	1.4301	A 276 Grade 304
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4541	A 213 TP 321
8 Stem	1.4301	A 276 Grade 304
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4305	A 276 Grade 303
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

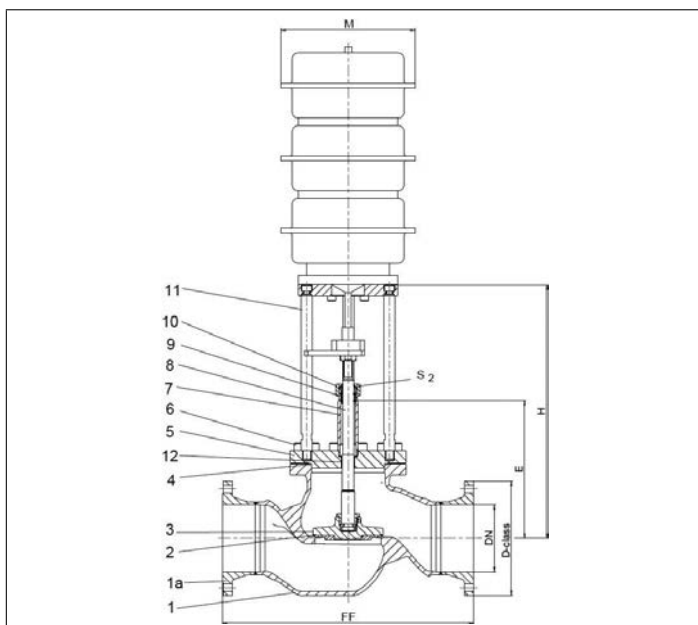

Type 03643 - Standard design	Technical data	
Nominal size	DN	200
Dimension code	.X.	8000
Flange-Ø	D-class	345
Face-to-face dimension	FF	760
Height	H	785
Length	E	410
Actuator-Ø	M	dependent on actuator
Wrench size across flats	S ₂	30
Weight w/o actuator	ca. kg	135
Kvs-Value	m ³ /h	680
Cv-Value	gal/min	786
Stroke	mm	60

Dimensions in mm.



Fire Safe Valves

Type 01653 - Actuated Trailervalue



Cryogenic-Globe Valves with Pneumatic Actuator, PN50

"Fire safe" type test approval acc. to EN ISO 10497

air pressure for operation 6.0 bar g (maximum 10.0 bar g), push-in connection 8mm

Stainless steel body and topwork,

Actuator - air opens, spring closes

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

maximum working pressure of the valve depending on nominal size

Part No. 01653.X.T0**

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01653.X.T0*4

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

· Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm

· Weather protection hood



Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Ambient temperature actuator: -50°C / -58°F (223K) up to +70°C / +158°F (343K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Bonnet gasket	Graphite	
5 Headpiece	1.4301	A 276 Grade 304
6 Bolts	1.4301/A2	A 194 B8
7 Elongation tube	1.4306	A 213 TP 304L
8 Stem	1.4301	A 276 Grade 304
9 Spring	1.4571	A 313 Grade 316Ti
10 Flansch	1.4301	A 276 Grade 304
11 Headpiece	1.4301	A 276 Grade 304
12 Gland packing	Graphite / PTFE / MICA	
13 Gland nut	1.4571	A 313 Grade 316Ti
14 Pillars	1.4301	A 276 Grade 304
15 Bush	CW452K	B 159 UNS C51900
16 Actuator	Rubber	

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

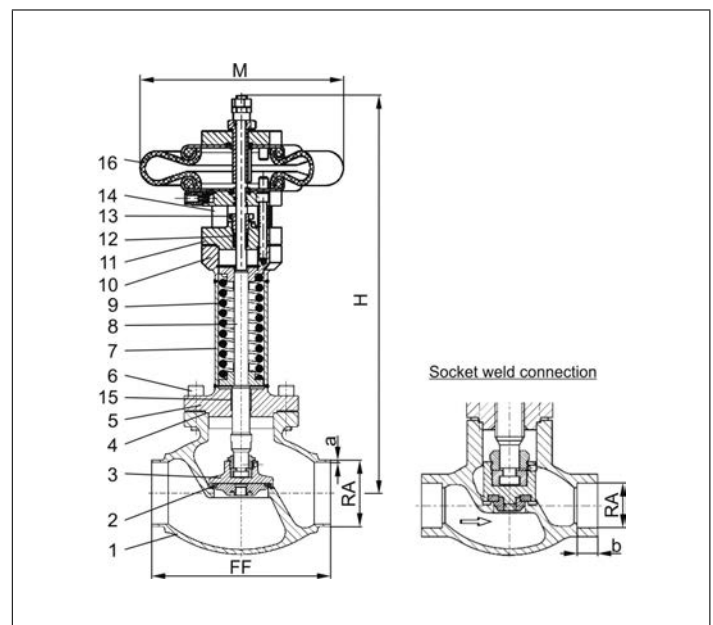

Type 01653 - Standard design	Technical data								
Nominal size	DN	20	20	25	40	40	50	65	80
Dimension code	.X.	2021	2026	2533	4042	4048	5060	657x	8088
Face-to-face dimension	FF	100	100	115	130	130	155	205	245
Height	H	395	395	444	441	441	420	470	500
Outside pipe-Ø ISO 1127	RA	21.3	26.9	33.7	42.4	48.3	60.3	76.1	88.9
Wall thickness pipe ISO 1127	a	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2
Outside pipe-Ø ASTM A312	RA	21.34	26.67	33.40	42.16	48.26	60.33	73.03	88.90
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40							
Socket depth	b	10	10	13	13	13	16	16	16
Actuator-Ø	M	229	229	229	229	229	229	229	229
Weight	ca. kg	7.2	7.2	9.1	10.5	10.5	14.5	17.4	22.5
Kvs-Value	m³/h	4.3	4.3	11.5	22.6	22.6	37.1	71.1	104.0
Cv-Value	gal/min	5.0	5.0	13.4	23.9	26.3	43.2	82.7	120.9
Stroke	mm	10	10	9	11	11	15	23	23
Δ P max	bar	50	50	50	16	16	10	3	4
Δ P max with special spring	bar	-	-	-	31	31	18	10	-

Dimensions in mm.

Fire Safe Valves

Type 05614 - Check Valve



"Fire Safe"-design without fire type-testing according to EN ISO 10497

Cryogenic-Check Valves, PN50 (DN150=PN40)

Stainless steel body and cap

with spring, opening pressure ca. 0.1 bar

"cleaned and degreased for oxygen service"

Part No. 05614.X.0004*

Butt or Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Disc seal: PTFE / Carbon filled (25%)

Part No. 05614.X.005*

Butt or Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Disc seal: PTFE

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4308	A 351 CF8
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4301	A 276 Grade 304
4 Spring	1.4571	A 313 Grade 316Ti
5 Bonnet gasket	Graphite	
6 Bolts	1.4301/A2	A 194 B8
7 Cap	1.4301	A 276 Grade 304
7a Bush from DN65	PTFE	

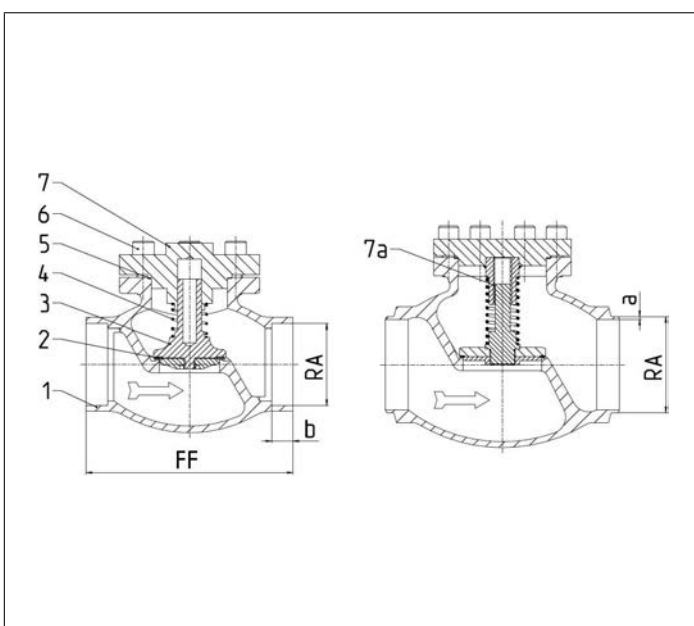

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05614 - Standard design	Technical data													
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100	150
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114	0168
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280	400
Height	H	71	71	71	72	75	87	95	95	95	125	150	185	214
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3	168.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0	7.1
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33	73.03	88.90	114.30	168.30
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40												
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20	20
Weight	ca. kg	0.7	0.95	1.0	1.3	1.6	2.4	3.9	3.9	5.7	9.6	14.6	20.0	50.0
Kvs-Value	m³/h	1.6	3.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/mir	1.9	4.4	5.0	7.8	13.4	16.2	23.9	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Cryogenic-Globe and Globe/Check Valves, PN50

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01751.X.000*

Part No. 01751.X.500* Globe/Check Valve

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01751.X.0004

Part No. 01751.X.5004 Globe/Check Valve

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Valve with control disc (tapered design)



Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

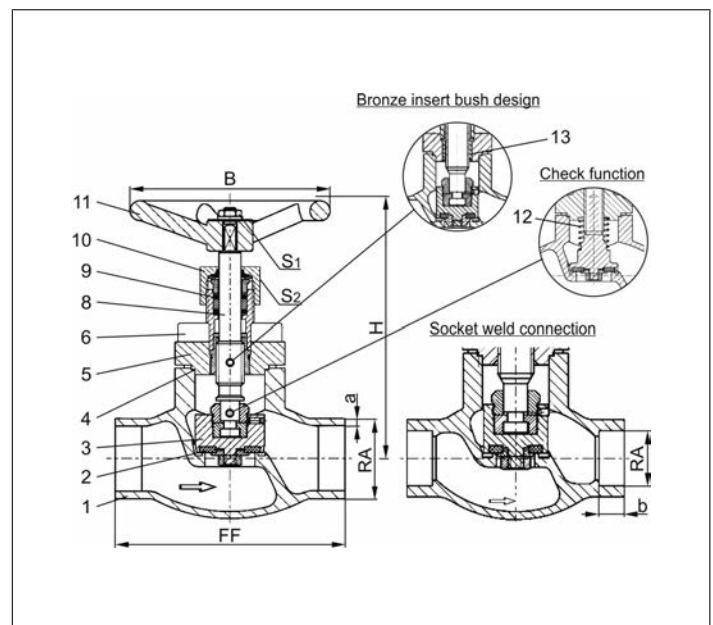

Type 01751 - Standard design	Technical data												
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280
Height	H	140	140	140	140	140	170	175	175	200	260	310	350
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33	73.03	88.90	114.3
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40											
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20
Handwheel-Ø	B	100	100	100	100	100	125	125	125	125	200	250	315
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10	10	10	10	12
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36	36	36	36	41
Weight	ca. kg	1.0	1.25	1.3	1.7	2.0	2.8	4.2	4.2	6.7	10.7	16.0	23.0
Kvs-Value	m ³ /h	1.6	3.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1	71.1	104.0	170.0
Cv-Value	gal/min	1.9	4.4	5.0	7.8	13.4	16.2	23.9	26.3	43.2	82.7	120.9	195.2

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN50

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01755.X.0001

Part No. 01755.X.5001 Globe/Check Valve

Female thread connection (G) acc. to ISO 228/1

Part No. 01755.X.0006

Part No. 01755.X.5006 Globe/Check Valve

Female thread connection NPT acc. to ANSI B 1.20.1

Available options - on request only:

- Female thread connection (R) acc. to ISO 7-Rc
- Valve with control disc (tapered design)



Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

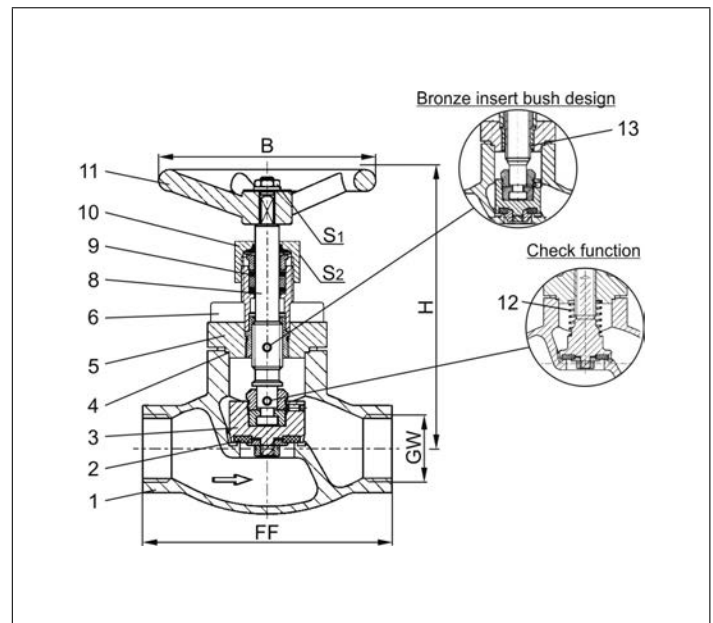

Type 01755 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	40	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	70	70	85	100	115	130	130	155
Height	H	140	140	140	140	140	175	175	200
Handwheel-Ø	B	100	100	100	100	100	125	125	125
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36
Weight	ca. kg	1.0	1.0	1.3	1.7	2.0	4.2	4.2	6.7
Kvs-Value	m ³ /h	1.6	2.2	4.3	6.7	11.5	20.6	22.6	37.1
Cv-Value	gal/min	1.9	2.6	5.0	7.8	13.4	23.9	26.3	43.2

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN16

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03751.X.0004

Part No. 03751.X.5004 Globe/Check Valve

Flanged connection acc. to DIN EN 1092-1 PN16

Available options - on request only:

- Valve with control disc (tapered design)



Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

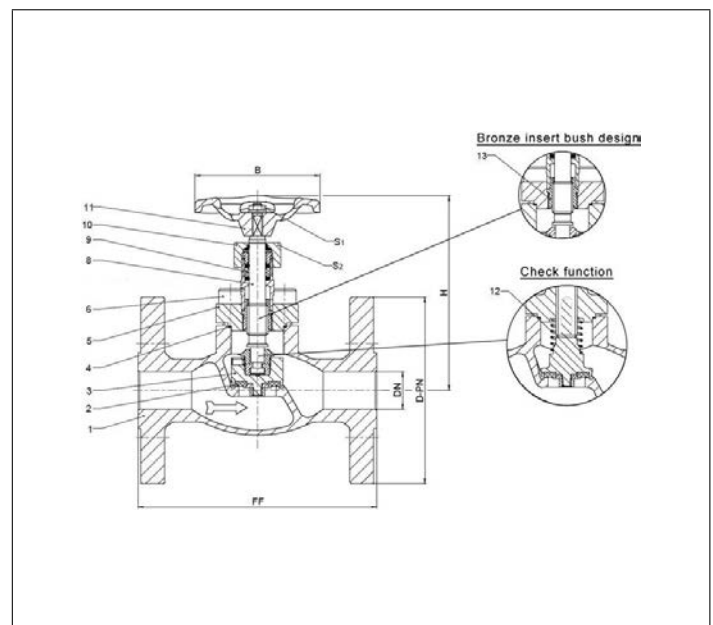

Type 03751 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN16	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	220	285
Face-to-face dimension	FF	140	150	160	200	230	295	310	350	510
Height	H	130	130	130	160	190	240	280	330	380
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	4.5	9.0	13.0	21.0	28.0	42.0	68.5
Kvs-Value	m ³ /h	4.3	11.5	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	13.4	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	12	12	12	15	19	23	25	30	45

Abmessungen in mm.

Cryogenic-Globe and Globe/Check Valves, PN40

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03751.X.0002

Part No. 03751.X.5002 Globe/Check Valve

Flanged connection acc. to DIN EN 1092-1 PN40

Available options - on request only:

- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

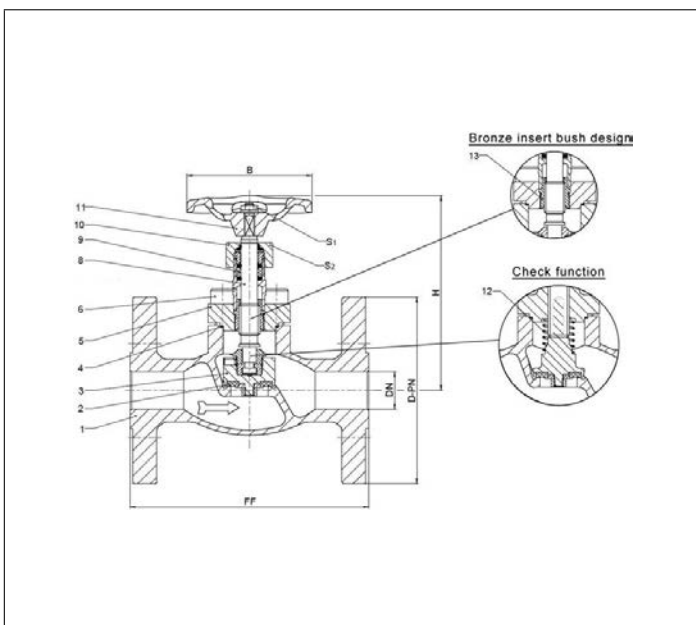

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03751 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	130	130	130	160	190	240	280	330	380
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	4.5	9.0	13.0	21.0	28.0	42.0	68.5
Kvs-Value	m ³ /h	4.3	11.5	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	13.4	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	12	12	12	15	19	23	25	30	45

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Offshore Valves

Type 03751 - Globe Valve, ANSI Flanges



Cryogenic-Globe and Globe/Check Valves, class 300

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03751.X.0003

Part No. 03751.X.5003 Globe/Check Valve

Flanged connection acc. to ANSI B16.5 class 300

Available options - on request only:

- Valve with control disc (tapered design)



Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

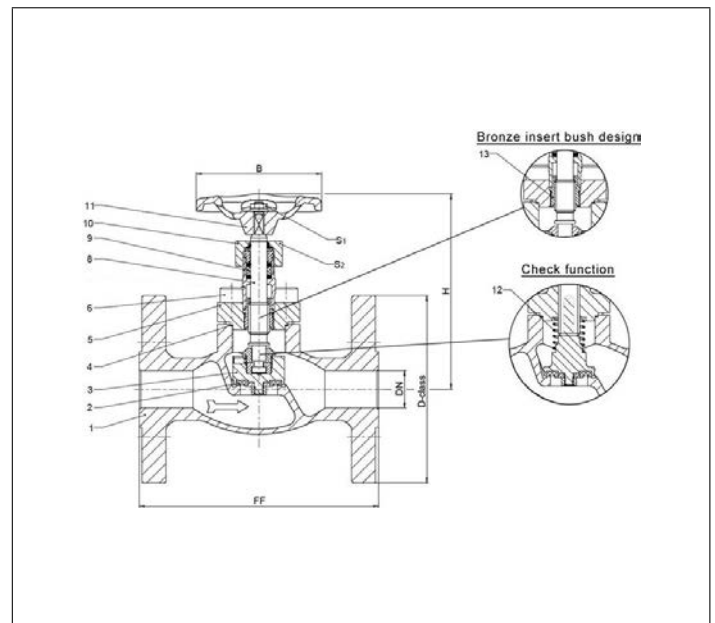

Type 03751 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	130	130	130	160	190	240	280	330	380
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	4.5	9.0	13.0	21.0	28.0	42.0	68.5
Kvs-Value	m ³ /h	4.3	11.5	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	13.4	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	12	12	12	15	19	23	25	30	45

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Cryogenic-Globe and Globe/Check Valves, class 150

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03751.X.0001

Part No. 03751.X.5001 Globe/Check Valve

Flanged connection acc. to ANSI B16.5 class 150

Available options - on request only:

- Valve with control disc (tapered design)



Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

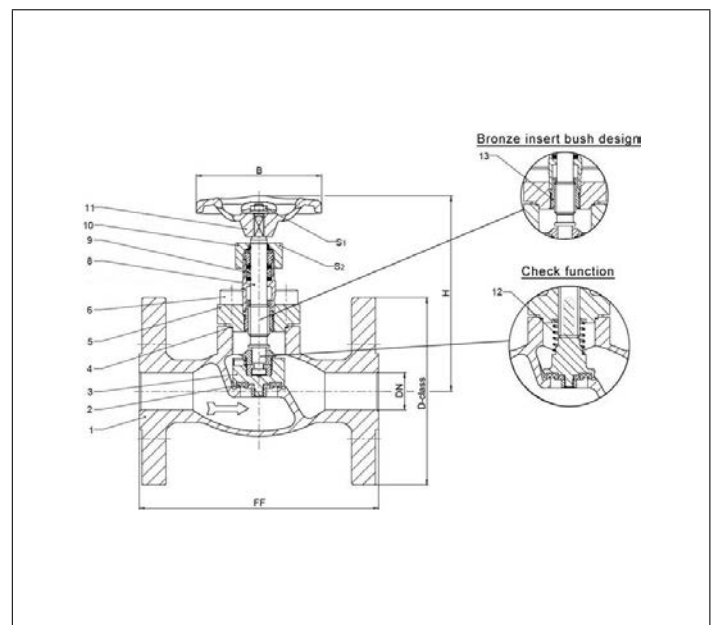

Type 03751 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	130	130	130	160	190	240	280	330	380
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	4.5	9.0	13.0	21.0	28.0	42.0	68.5
Kvs-Value	m ³ /h	4.3	11.5	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	13.4	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	12	12	12	15	19	23	25	30	45

Abmessungen in mm.

Type 01741 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, PN50 (DN150=PN40)

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01741.X.001* (H = 270mm)

Part No. 01741.X.002* (H = 370mm)

Part No. 01741.X.501* (H = 270mm) Globe/Check Valve

Part No. 01741.X.502* (H = 370mm) Globe/Check Valve

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01741.X.0014 (H = 270mm)

Part No. 01741.X.0024 (H = 370mm)

Part No. 01741.X.5014 (H = 270mm) Globe/Check Valve

Part No. 01741.X.5024 (H = 370mm) Globe/Check Valve

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

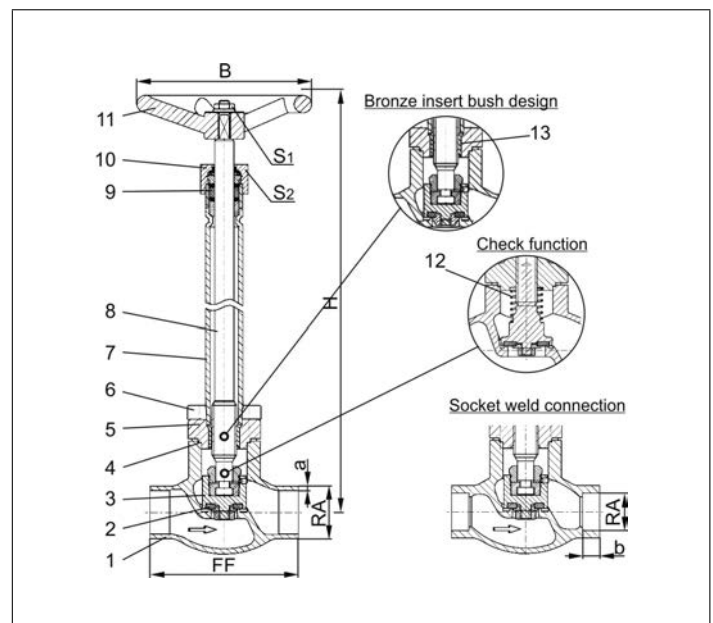

Type 01741 - Standard design	Technical data													
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100	150
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114	0168
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280	400
Height	H	270 mm or 370 mm											370	420
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3	168.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0	7.1
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33	73.03	88.90	114.3	168.3
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40												
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20	20
Handwheel-Ø	B	100	100	100	100	100	125	125	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36	36	36	36	41	41
Weight	ca. kg	1.4	1.65	1.7	2.1	2.4	3.3	4.7	4.7	7.2	12.7	17.0	24.5	54.0
Kvs-Value	m ³ /h	1.6	3.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	1.9	4.4	5.0	7.8	13.4	16.2	23.9	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Cryogenic Globe Valves, DN200, PN25

Stainless steel body and topwork
"live loaded" gland packing

Part No. 01741.0219.001* (H=560)

Part No. 01741.0219.006* (H=1000)

*Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01741.0219.00*4

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

In flow direction, the valve with the nominal size DN200 is conform to tightness class L1 up to 9 bar maximum differential pressure acc. to DIN 12567 for LNG use. This standard can also be used for the tightness class of other cryogenic gases.


Available options - on request only

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
13 Bush	CW452K	B 159 UNS C51900

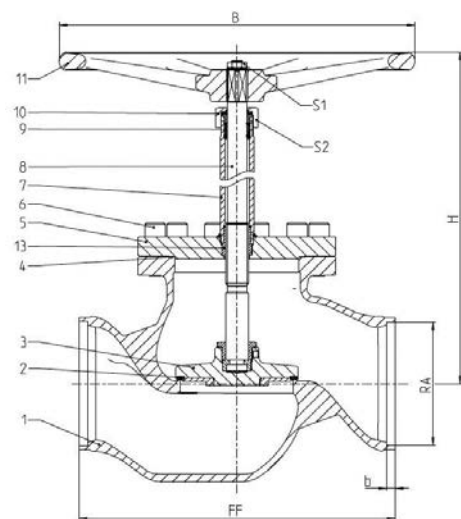

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 01741 - Standard design	Technical data	
Nominal size	DN	200
Dimension code	.X.	0219
Face-to-face dimension	FF	560
Height	H	560
Outside pipe-Ø ISO 1127	RA	219.1
Wall thickness pipe ISO 1127	a	6.3
Outside pipe-Ø ASTM A312	RA	219.1
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40
Socket depth	b	15
Handwheel-Ø	B	630
Wrench size across flats	S ₁	30
Wrench size across flats	S ₂	65
Weight	ca. kg	135
Kvs-Value	m ³ /h	680
Cv-Value	gal/min	786

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN50

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01745.X.0011 (H = 270mm)

Part No. 01745.X.0021 (H = 370mm)

Part No. 01745.X.5011 (H = 270mm) Globe/Check Valve

Part No. 01745.X.5021 (H = 370mm) Globe/Check Valve

Female thread connection (G) acc. to ISO 228/1

Part No. 01745.X.0016 (H = 270mm)

Part No. 01745.X.0026 (H = 370mm)

Part No. 01745.X.5016 (H = 270mm) Globe/Check Valve

Part No. 01745.X.5026 (H = 370mm) Globe/Check Valve

Female thread connection NPT acc. to ANSI B 1.20.1

Available options - on request only:

- Female thread connection (R) acc. to ISO 7-Rc
- Extension H up to 900mm
- Valve with control disc (tapered design)


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

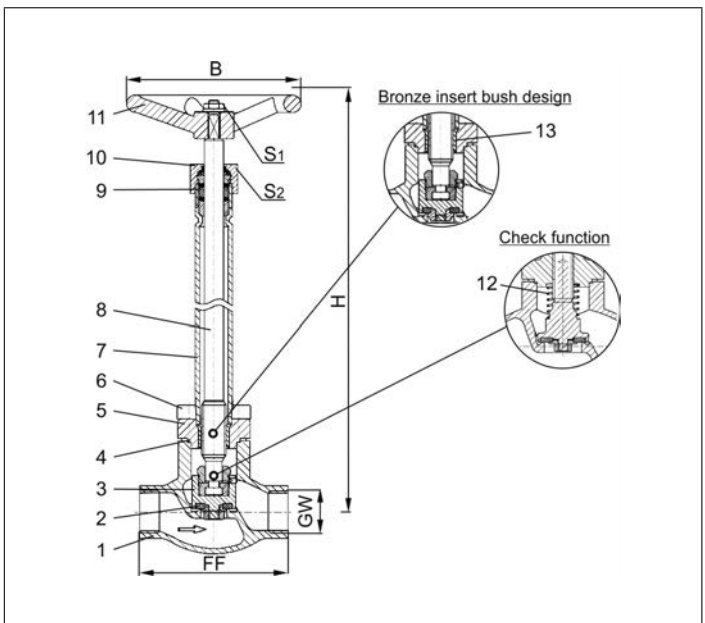

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 01745 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	40	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	70	70	85	100	115	130	130	155
Height	H	270 mm or 370 mm							
Handwheel-Ø	B	100	100	100	100	100	125	125	125
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36
Weight	ca. kg	1.4	1.4	1.7	2.1	2.4	4.7	4.7	7.2
Kvs-Value	m ³ /h	1.6	2.2	4.3	6.7	11.5	20.6	22.6	37.1
Cv-Value	gal/min	1.9	2.6	5.0	7.8	13.4	23.9	26.3	43.2

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN16

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03741.X.0014 (H = 270mm)

Part No. 03741.X.0024 (H = 370mm)

Part No. 03741.X.5014 (H = 270mm) Globe/Check Valve

Part No. 03741.X.5024 (H = 370mm) Globe/Check Valve

Flanged connection acc. to DIN EN 1092-1 PN16

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

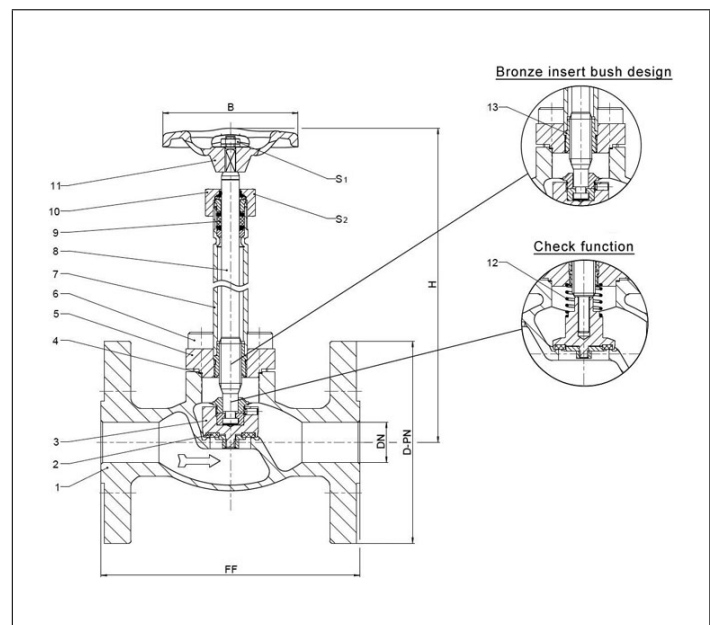

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03741 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN16	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	220	285
Face-to-face dimension	FF	140	150	160	200	230	295	310	350	510
Height	H	270 mm or 370 mm							370	420
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	5.0	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	12	12	12	15	19	23	25	30	45

Dimensions in mm.

Cryogenic-Globe and Globe/Check Valves, PN40

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03741.X.0012 (H = 270mm)

Part No. 03741.X.0022 (H = 370mm)

Part No. 03741.X.5012 (H = 270mm) Globe/Check Valve

Part No. 03741.X.5022 (H = 370mm) Globe/Check Valve

Flanged connection acc. to DIN EN 1092-1 PN40

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

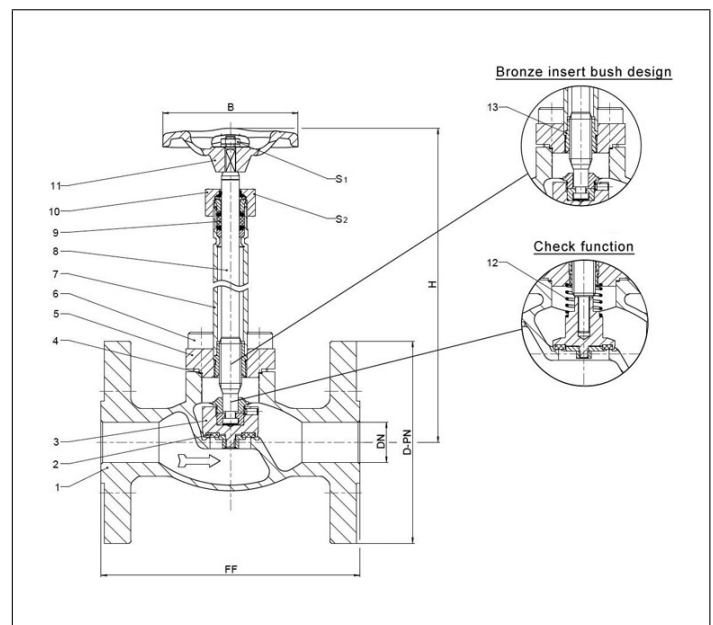

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03741 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	270 mm or 370 mm								420
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	5.0	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	12	12	12	15	19	23	25	30	45

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Offshore Valves

Type 03741 - Globe Valve, ANSI Flanges



Cryogenic-Globe and Globe/Check Valves, class 300

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03741.X.0013 (H = 270mm)

Part No. 03741.X.0023 (H = 370mm)

Part No. 03741.X.5013 (H = 270mm) mit Rückschlagfunktion

Part No. 03741.X.5023 (H = 370mm) mit Rückschlagfunktion

Flanged connection acc. to ANSI B16.5 class 300

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

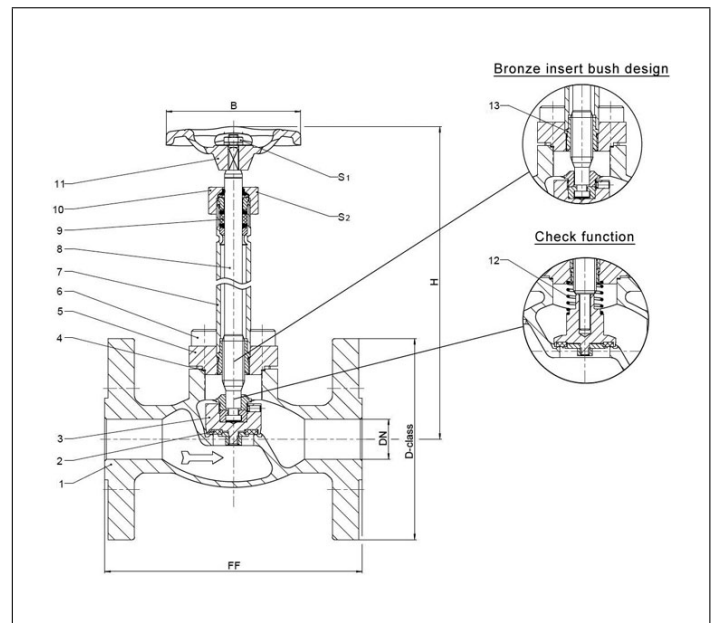

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03741 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	270 mm or 370 mm								420
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	5.0	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	12	12	12	15	19	23	25	30	45

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Offshore Valves

Type 03741 - Globe Valve, ANSI Flanges



Cryogenic-Globe and Globe/Check Valves, class 150

Stainless steel body and topwork,
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 03741.X.0011 (H = 270mm)

Part No. 03741.X.0021 (H = 370mm)

Part No. 03741.X.5011 (H = 270mm) mit Rückschlagfunktion

Part No. 03741.X.5021 (H = 370mm) mit Rückschlagfunktion

Flanged connection acc. to ANSI B16.5 class 150

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

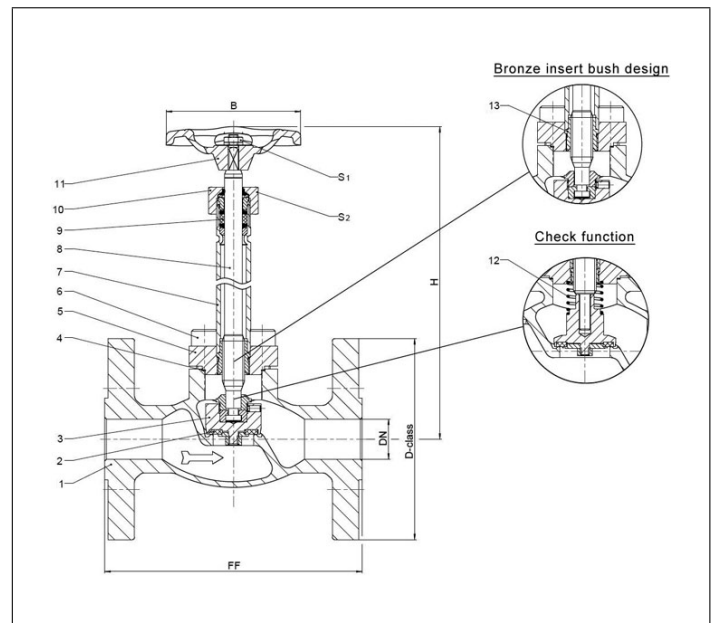

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03741 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	270 mm or 370 mm							370	420
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	5.0	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	12	12	12	15	19	23	25	30	45

Dimensions in mm.

Cryogenic Globe Valves, class 150

Stainless steel body and topwork,
"live loaded" gland packing

Part No. 03741.8000.0011 (H=560)

Flanged connection acc. to ANSI B16.5 class 150

In flow direction, the valve with the nominal size DN200 is conform to tightness class L1 up to 12 bar maximum differential pressure acc. to DIN 12567 for LNG use.
This standard can also be used for the tightness class of other cryogenic gases.

Available options - on request only




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
1a Flange	1.4404	A 276 Grade 316L
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

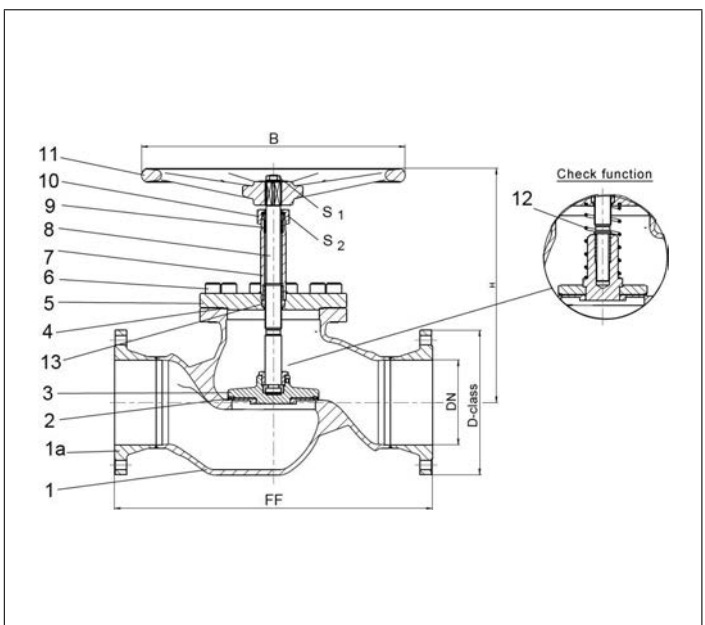

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03741 - Standard design	Technical data	
Nominal size	DN	200
Dimension code	.X.	8000
Flange-Ø	D-class	345
Face-to-face dimension	FF	760
Height	H	560
Handwheel-Ø	B	630
Wrench size across flats	S ₁	30
Wrench size across flats	S ₂	65
Weight	ca. kg	135
Kvs-Value	m ³ /h	680
Cv-Value	gal/min	786

Dimensions in mm.

Type 01272 - Bellow Sealed Globe Valve



Cryogenic-Bellow Sealed Globe Valve, PN50

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01272.X.002*

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01272.X.0024

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Leak rate: 10-6 mbar ltr / sec outside, 10-4 mbar ltr / sec seat

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bellow stem	1.4571	A 313 Grade 316Ti
7 Bolts	1.4401/A4	A 194 B8M
8 Bellow	1.4571	A 313 Grade 316Ti
9 Elongation tube	1.4571	A 313 Grade 316Ti
10 Headpiece	1.4404	A 276 Grade 316L
11 Bush	CW452K	B 159 UNS C51900
12 Stem	1.4404	A 276 Grade 316L
13 Gland packing	Graphite / PTFE / MICA	
14 Gland nut	1.4404	A 276 Grade 316L
15 Handwheel	1.4409	A 351 CF3M

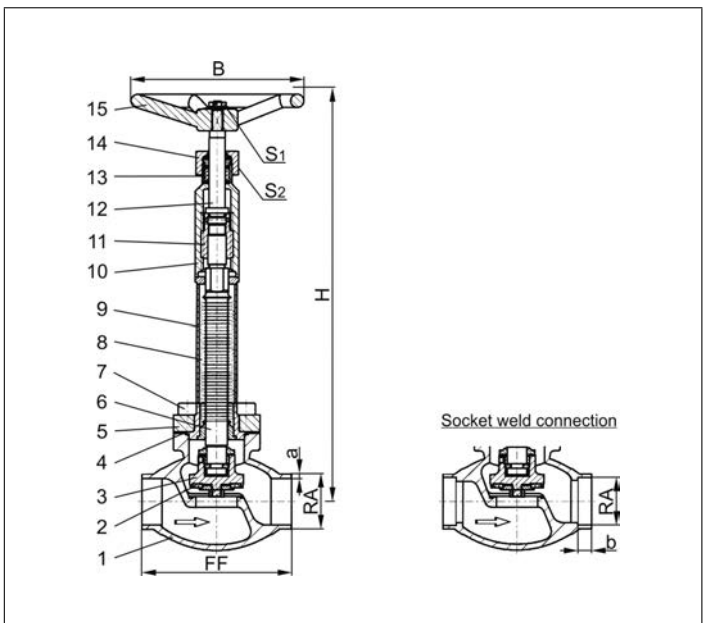

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 01272 - Standard design	Technical data									
Nominal size	DN	10	15	15	20	25	32	40	40	50
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155
Height	H	380	380	380	380	380	380	380	380	380
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40								
Socket depth	b	6	10	10	13	13	-	13	13	16
Handwheel-Ø	B	150	150	150	150	150	150	150	150	150
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36	36
Weight	ca. kg	1.6	1.85	1.9	2.3	2.7	3.6	5.1	5.1	7.7
Kvs-Value	m ³ /h	1.6	2.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1
Cv-Value	gal/min	1.9	3.3	5.0	7.8	13.4	16.2	26.3	26.3	43.2

Dimensions in mm.

Cryogenic-Bellow Sealed Globe Valve, PN40

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03272.X.0022

Flanged connection acc. to DIN EN 1092-1 PN40

Available options - on request only:


- Extension H up to 900mm
- Valve with control disc (tapered design)



Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)
Leak rate:: 10-6 mbar ltr / sec outside, 10-4 mbar ltr / sec seat

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bellow stem	1.4571	A 276 Grade 316Ti
7 Bolts	1.4571/A4	similar A 194 B8T
8 Bellow	1.4571	A 313 Grade 316Ti
9 Elongation tube	1.4571	A 313 Grade TP316Ti
10 Headpiece	1.4404	A 276 Grade 316L
11 Bush	CW452K	B 159 UNS C51900
12 Stem	1.4404	A 276 Grade 316L
13 Gland packing	Graphite / PTFE / MICA	
14 Gland nut	1.4404	A 276 Grade 316L
15 Handwheel	1.4409	A 351 CF3M

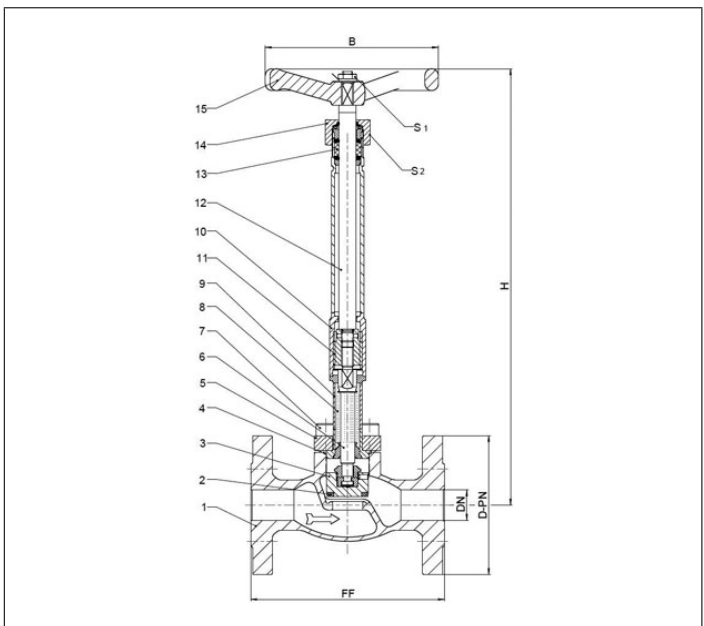

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Typ 03272 - Standard design		Technical data				
Nominal size	DN	15	20	25	40	50
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500
Flange-Ø	D-PN	95	105	115	150	165
Face-to-face dimension	FF	140	150	160	200	230
Height	H	370	370	370	370	370
Handwheel-Ø	B	150	150	150	150	150
Wrench size across flats	S ₁	7	7	7	10	10
Wrench size across flats	S ₂	30	30	30	36	36
Weight	ca. kg	3.7	5.0	5.4	10.2	13.9
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2
Stroke	mm	7	7	7	15	15

Dimensions in mm.

Cryogenic-Bellow Sealed Globe Valve, class 300

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03272.X.0023

Flanged connection acc. to ANSI B16.5 class 300

Available options - on request only:


- Extension H up to 900mm
- Valve with control disc (tapered design)



Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)
Leak rate: 10-6 mbar ltr / sec outside, 10-4 mbar ltr / sec seat

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bellow stem	1.4571	A 276 Grade 316Ti
7 Bolts	1.4571/A4	similar A 194 B8T
8 Bellow	1.4571	A 313 Grade 316Ti
9 Elongation tube	1.4571	A 313 Grade TP316Ti
10 Headpiece	1.4404	A 276 Grade 316L
11 Bush	CW452K	B 159 UNS C51900
12 Stem	1.4404	A 276 Grade 316L
13 Gland packing	Graphite / PTFE / MICA	
14 Gland nut	1.4404	A 276 Grade 316L
15 Handwheel	1.4409	A 351 CF3M

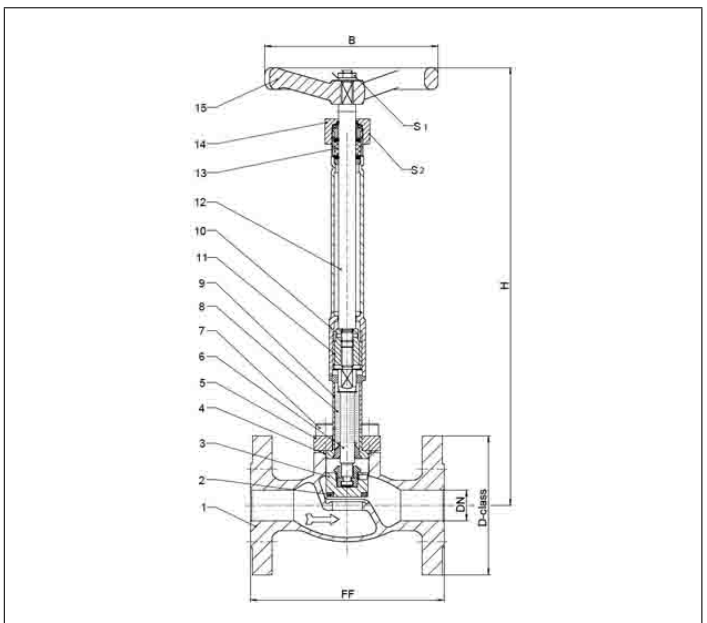

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Typ 03272 - Standard design		Technical data				
Nominal size	DN	15	20	25	40	50
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000
Flange-Ø	D-class	95	115	125	155	165
Face-to-face dimension	FF	140	150	160	200	230
Height	H	370	370	370	370	370
Handwheel-Ø	B	150	150	150	150	150
Wrench size across flats	S ₁	7	7	7	10	10
Wrench size across flats	S ₂	30	30	30	36	36
Weight	ca. kg	3.7	5.0	5.4	10.2	13.9
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2
Stroke	mm	7	7	7	15	15

Abmessungen in mm.

Cryogenic-Bellow Sealed Globe Valve, class 150

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03272.X.0021

Flanged connection acc. to ANSI B16.5 class 150

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)
Leak rate: 10-6 mbar ltr / sec outside, 10-4 mbar ltr / sec seat

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bellow stem	1.4571	A 276 Grade 316Ti
7 Bolts	1.4571/A4	similar A 194 B8T
8 Bellow	1.4571	A 313 Grade 316Ti
9 Elongation tube	1.4571	A 313 Grade TP316Ti
10 Headpiece	1.4404	A 276 Grade 316L
11 Bush	CW452K	B 159 UNS C51900
12 Stem	1.4404	A 276 Grade 316L
13 Gland packing	Graphite / PTFE / MICA	
14 Gland nut	1.4404	A 276 Grade 316L
15 Handwheel	1.4409	A 351 CF3M

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

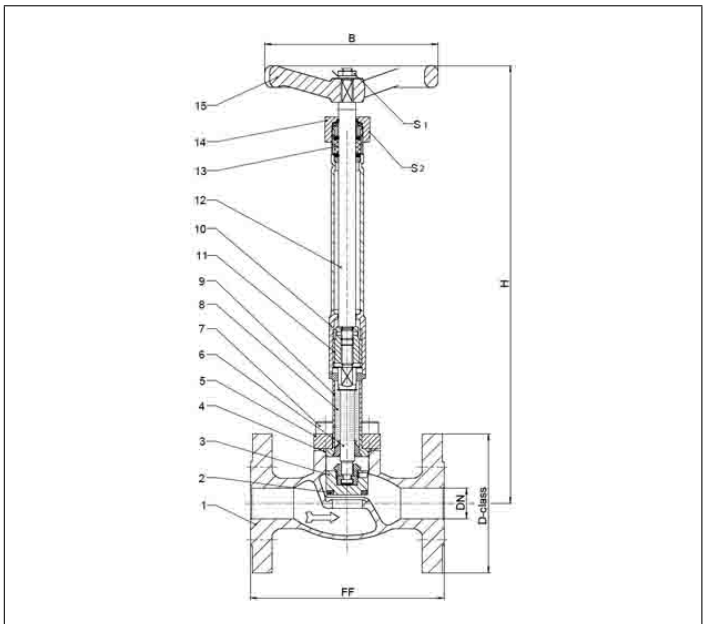

Typ 03272 - Standard design	Technical data					
Nominal size	DN	15	20	25	40	50
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000
Flange-Ø	D-class	90	100	110	125	150
Face-to-face dimension	FF	140	150	160	200	230
Height	H	370	370	370	370	370
Handwheel-Ø	B	150	150	150	150	150
Wrench size across flats	S ₁	7	7	7	10	10
Wrench size across flats	S ₂	30	30	30	36	36
Weight	ca. kg	3.7	5.0	5.4	10.2	13.9
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2
Stroke	mm	7	7	7	15	15

Abmessungen in mm.

Type 01470 - Top-Entry-Valve

Cryogenic-Globe Valves, PN50 (DN100=PN40)

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 01470.X.0*8*

Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Extension H and E acc. to customer specification
- Valve with check disc




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE	
3 Disc	1.4404	A 276 Grade 316L
4 Guide bush	1.4571	A 276TP 316Ti
5 Stem	1.4404	A 276 Grade 316L
6 Elongation tube	1.4571	A 213TP 316Ti
7 Elongation tube	1.4571	A 213TP 316Ti
8 Cold box feature	1.4571	A 213TP 316Ti
9 Headpiece flange	1.4404	A 276 Grade 316L
10 Headpiece	1.4404	A 276 Grade 316L
11 Bolts	1.4571/A4 similar A 193 B8T	
12 Gland packing	Graphite / PTFE / MICA	
13 Gland nut	1.4404	A 276 Grade 316L
14 Handwheel	1.4409	A 351 CF3M

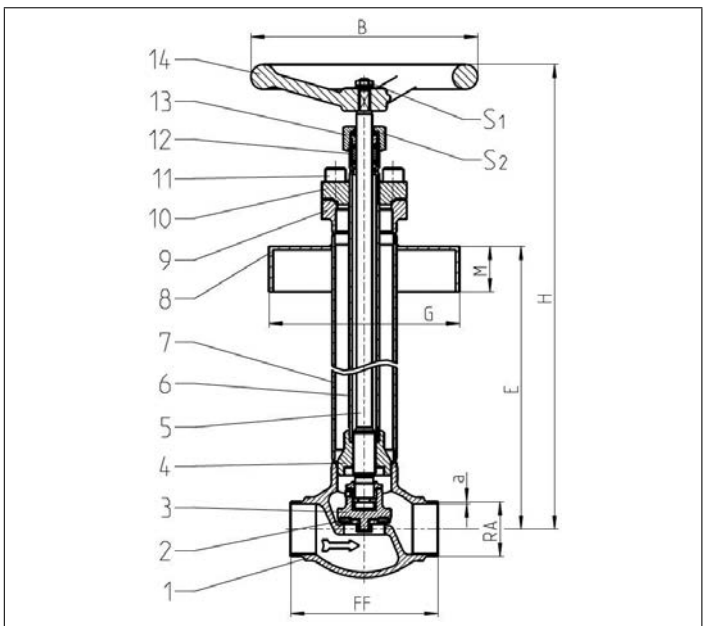

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 01470 - Standard design	Technical data									
Nominal size	DN	10	15	20	25	40	50	65	80	100
Dimension code	.X.	1013	1521	2026	2533	4048	5060	6573	8088	0114
Face-to-face dimension	FF	70	85	100	115	130	155	205	245	280
Height	H	690	690	690	690	710	780	790	840	960
Handwheel-Ø	B	100	100	100	100	200	200	250	315	315
Outside pipe -Ø ASTM A312	RA	13.50	21.34	26.67	33.40	48.26	60.33	73.02	88.90	114.30
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40								
Length	A	540	540	540	540	540	610	610	640	750
Length	G	acc. to customer specification								
Length	M	acc. to customer specification								
Wrench size across flats	S ₁	10	10	10	10	13	13	13	13	13
Wrench size across flats	S ₂	27	27	27	27	32	32	41	41	41
Weight	ca. kg	4.0	4.0	4.8	5.1	9.1	11.5	19.6	26.9	37.4
Kvs-Value	m ³ /h	1.6	4.3	6.7	11.5	22.6	37.1	71.1	104.0	168.0
Cv-Value	gal/min	1.9	5.0	7.8	13.4	26.3	43.2	83.2	121.7	196.6
Stroke	mm	11	12	12	12	15	19	23	25	30

Dimensions in mm.

Type 01743 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN50 (DN150=PN40)

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 01743.X.*01*

Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01743.X.*014

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available accessories:

- Solenoid valve · Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Actuator "cleaned and degreased for oxygen service"
- Electric actuator · Valve with check disc, valve with control disc (tapered design)

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

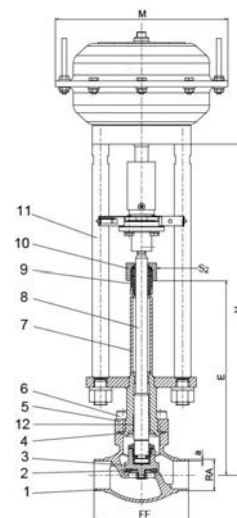

Type 01743 - Standard design	Technical data													
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100	150
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114	0168
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280	400
Height	H	370	370	370	370	375	405	420	420	425	510	575	635	685
Length	E	195	195	195	200	200	230	230	230	235	300	300	300	300
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3	168.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0	7.1
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33	73.03	88.90	114.3	168.3
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40												
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20	20
Actuator-Ø	M	dependent on actuator												
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36	36	36	36	41	41
Weight w/o actuator	ca. kg	1.9	2.15	2.2	2.4	3.1	3.8	6.5	6.5	9.0	15.2	20.0	28.0	60.9
Kvs-Value	m ³ /h	1.6	3.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	1.9	4.4	5.0	7.8	13.4	16.2	23.9	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	10	10	7	9	9	11	11	15	23	23	30	40

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Type 01743 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN25

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

Part No. 01743.0219.*01*

Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01743.0219.*014

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

In flow direction, the valve with the nominal size DN200 is conform to tightness class

L1 up to 18 bar maximum differential pressure acc. to DIN 12567 for LNG use.

This standard can also be used for the tightness class of other cryogenic gases.

Available accessories/options - on request only:

- Solenoid valve · Limit switch · Electropneumatic positioner etc.
- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312
- Actuator "cleaned and degreased for oxygen service"
- Valve with check or control disc (tapered design)

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

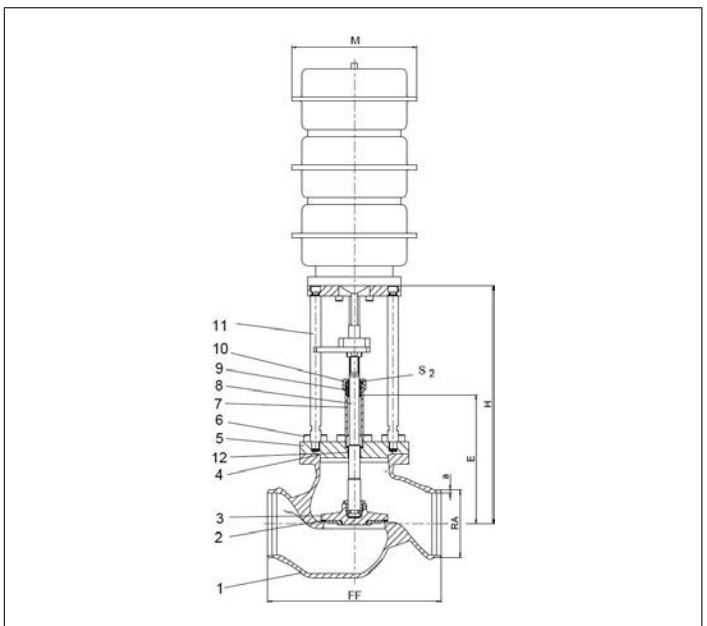

Type 01743 - Standard design	Technical data	
Nominal size	DN	200
Face-to-face dimension	FF	560
Height	H	785
Length	E	410
Outside pipe-Ø ISO 1127	RA	219.1
Wall thickness pipe ISO 1127	a	6.3
Outside pipe-Ø ASTM A312	RA	219.1
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40
Socket depth	b	15
Actuator-Ø	M	depend on actuator
Wrench size across flats	S ₂	65
Weight w/o actuator	ca. kg	165.0
Kvs-Value	m ³ /h	680.0
Cv-Value	gal/min	786.0
Stroke	mm	60

Dimensions in mm.

Type 03743 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN16

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03743.X.*014

Flanged connection acc. to DIN EN 1092-1 PN16

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

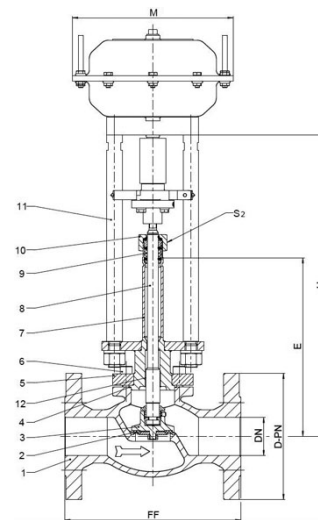

Type 03743 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN16	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	220	285
Face-to-face dimension	FF	140	150	160	200	230	295	310	350	510
Height	H	370	370	375	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	350
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	87.0
Kvs - Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv - Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	30

Dimensions in mm.

Cryogenic-Globe Valves with Pneumatic Actuator, PN40

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03743.X.*012

Flanged connection acc. to DIN EN 1092-1 PN40

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

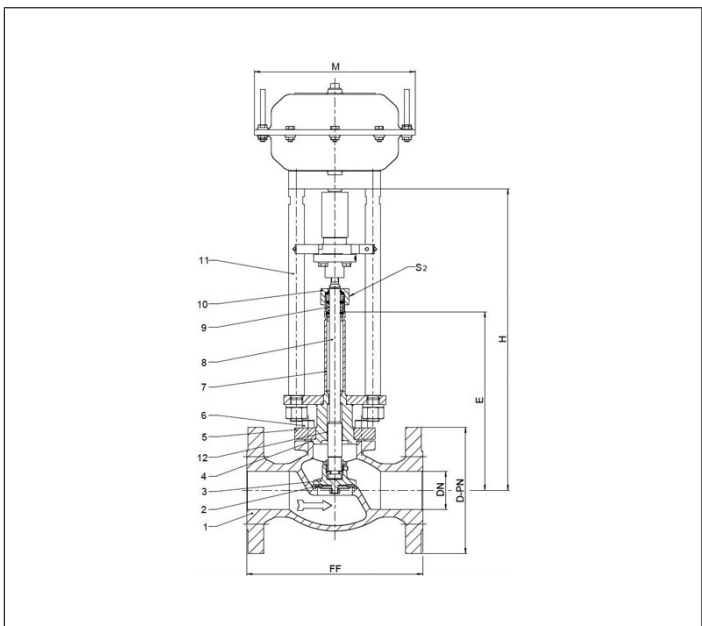

Type 03743 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	370	370	375	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	300
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	100.0
Kvs - Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv - Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	40

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Cryogenic-Globe Valves with Pneumatic Actuator, class 300

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03743.X.*013

Flanged connection acc. to ANSI B16.5 class 300

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

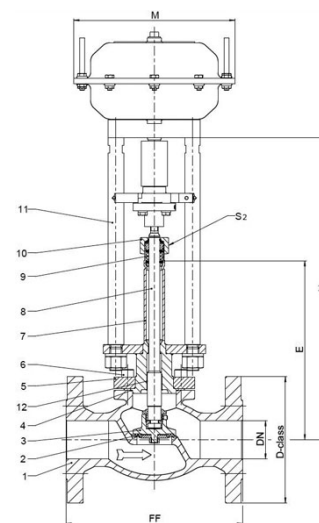

Type 03743 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	370	370	375	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	300
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	100.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	40

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Type 03743 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, class 150

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03743.X.*011

Flanged connection acc. to ANSI B16.5 class 150

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

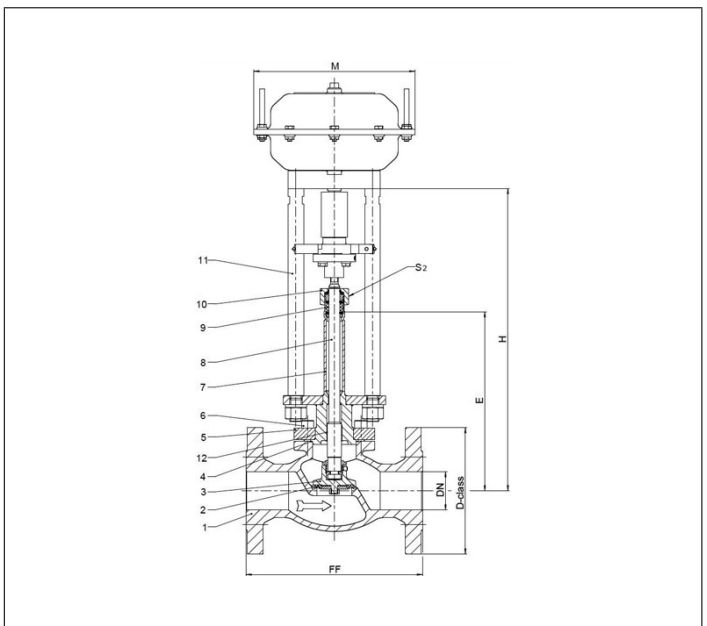

Type 03743 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	370	370	375	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	300
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	87.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	40

Dimensions in mm.

Type 03743 - Actuated Globe Valve

Cryogenic-Globe Valves with Pneumatic Actuator, class 150

Stainless steel body and topwork

Actuator - air opens, spring closes or contrary

"live loaded" gland packing

Part No. 03743.8000.X

Flanged connection acc. to ANSI B16.5 class 300

In flow direction, the valve with the nominal size DN200 is conform to tightness class

L1 up to 18 bar maximum differential pressure acc. to DIN 12567 for LNG use.

This standard can also be used for the tightness class of other cryogenic gases.

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check or control disc (tapered design)

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
1a Flange	1.4404	A 276 Grade 316L
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

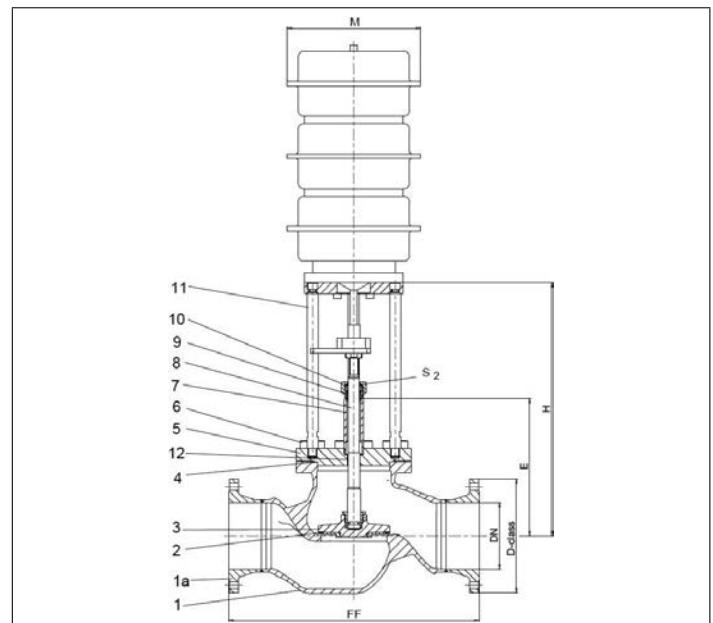

Type 03743 - Standard design	Technical data	
Nominal size	DN	200
Dimension code	.X.	8000
Flange-Ø	D-class	345
Face-to-face dimension	FF	760
Height	H	785
Length	E	410
Actuator-Ø	M	dependent on actuator
Wrench size across flats	S ₂	30
Weight w/o actuator	ca. kg	135
Kvs-Value	m ³ /h	680
Cv-Value	gal/min	786
Stroke	mm	60

Dimensions in mm.

Type 01473 - Actuated Top-Entry-Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN50 (DN100=PN40)

Stainless steel body and topwork

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 01473.X.3081

Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available accessories/options - on request only:

- Solenoid valve · Limit switch · Electropneumatic positioner etc.
- Extension H and A acc. to customer specification
- Actuator "cleaned and degreased for oxygen service"
- Valve with check disc, valve with control disc (tapered design)


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE	
3 Disc	1.4404	A 276 Grade 316L
4 Guide bush	1.4571	A 276TP 316Ti
5 Stem	1.4404	A 276 Grade 316L
6 Elongation tube	1.4571	A 213TP 316Ti
7 Elongation tube	1.4571	A 213TP 316Ti
8 Cold box feature	1.4571	A 213TP 316Ti
9 Headpiece flange	1.4404	A 276 Grade 316L
10 Headpiece	1.4404	A 276 Grade 316L
11 Bolts	1.4571/A4	similar A 193 B8T
12 Gland packing	Graphite / PTFE / MICA	
13 Gland nut	1.4404	A 276 Grade 316L
14 Pillars	1.4404	A 276 Grade 316L

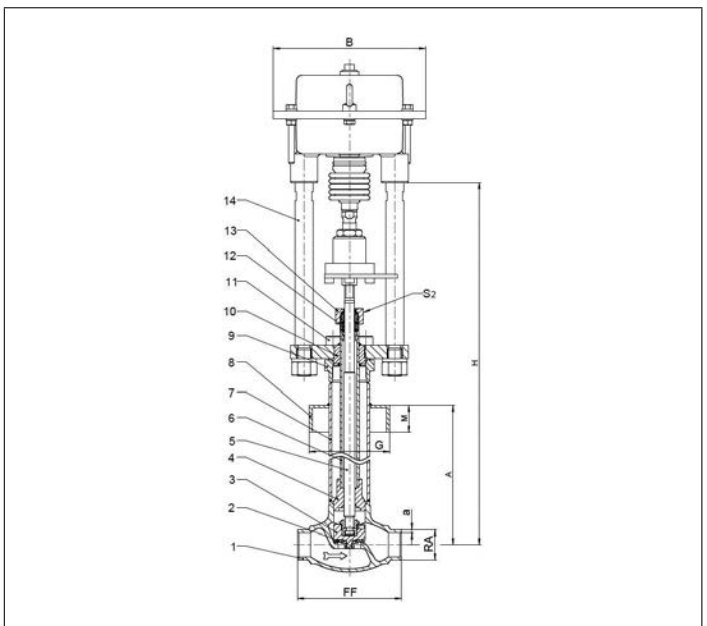

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 01473 - Standard design		Technical data								
Nominal size	DN	10	15	20	25	40	50	65	80	100
Dimension code	.X.	1013	1521	2026	2533	4048	5060	6573	8088	0114
Face-to-face dimension	FF	70	85	100	115	130	155	205	245	280
Height	H	770	785	790	790	820	910	1105	1110	1290
Actuator-Ø	B	dependent on actuator								
Outside pipe-Ø ASTM A312	RA	13.50	21.34	26.67	33.40	48.26	60.33	73.00	89.00	114.30
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40								
Length	A	540	540	540	540	540	610	610	640	750
Length	G	acc. to customer specification								
Length	M	acc. to customer specification								
Wrench size across flats	S ₂	27	27	27	27	32	32	41	41	41
Stroke	mm	10	10	7	9	11	15	23	23	30
Weight without actuator	ca. kg	5.7	5.5	6.0	7.0	10.0	11.5	28.3	34.3	49.2
Kvs-Value	m ³ /h	1.6	4.3	6.7	11.5	20.6	37.1	71.1	104.0	168.0
Cv-Value	gal/min	1.9	5.0	7.8	13.4	26.3	43.2	83.2	121.7	196.6

Dimensions in mm.

Cryogenic-Globe Valves with Pneumatic Actuator, PN50

air pressure for operation 6.0 bar g (maximum 10.0 bar g), push-in connection 8mm

Stainless steel body and topwork,

Actuator - air opens, spring closes

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

maximum working pressure of the valve depending on nominal size

Part No. 01753.X.T0**

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01753.X.T0*4

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Weather protection hood



Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Ambient temperature actuator: -50°C / -58°F (223K) up to +70°C / +158°F (343K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PCTFE (Kel-F)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Spring	1.4571	A 313 Grade 316Ti
10 Flange	1.4404	A 276 Grade 316L
11 Headpiece	1.4404	A 276 Grade 316L
12 Gland packing	Graphite / PTFE / MICA	
13 Gland nut	1.4571	A 313 Grade 316Ti
14 Pillars	1.4404	A 276 Grade 316L
15 Bush	CW452K	B 159 UNS C51900
16 Actuator	Rubber	

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

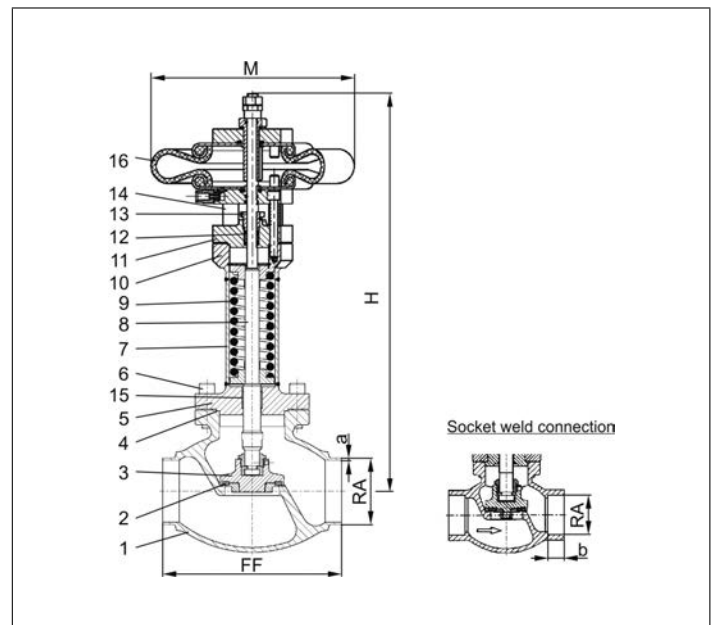

Type 01753 - Standard design	Technical data								
Nominal size	DN	20	20	25	40	40	50	65	80
Dimension code	.X.	2021	2026	2533	4042	4048	5060	657x	8088
Face-to-face dimension	FF	100	100	115	130	130	155	205	245
Height	H	395	395	444	441	441	420	470	500
Outside pipe-Ø ISO 1127	RA	21.3	26.9	33.7	42.4	48.3	60.3	76.1	88.9
Wall thickness pipe ISO 1127	a	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2
Outside pipe-Ø ASTM A312	RA	21.34	26.67	33.40	42.16	48.26	60.33	73.03	88.90
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40							
Socket depth	b	10	10	13	13	13	16	16	16
Actuator-Ø	M	229	229	229	229	229	229	229	229
Weight	ca. kg	7.2	7.2	9.1	10.5	10.5	14.5	17.4	22.5
Kvs-Value	m³/h	4.3	4.3	11.5	22.6	22.6	37.1	71.1	104.0
Cv-Value	gal/min	5.0	5.0	13.4	23.9	26.3	43.2	82.7	120.9
Stroke	mm	10	10	9	11	11	15	23	23
Δ P max	bar	50	50	50	16	16	10	3	4
Δ P max with special spring	bar	-	-	-	31	31	18	10	-

Dimensions in mm.

Pneumatic Actuators for Globe Valves (on/off)

Actuator - air to open, **spring to close**

maximum air pressure for operation 6.0 bar g

"cleaned and degreased for oxygen service"

Available options - on request only:

· Pneumatic actuator with override handwheel

Ambient temperature limit: -40°C / -40°F (233K) up to +80°C / 176°F (353K)

Overview - required actuator sizes for differential pressures


DN	Differential pressure in bar													
	0	3.1	4.1	7.1	10.1	11.1	15.1	18.1	20.1	22.1	30.1	33.1	35.1	
	- 3.0	- 4.0	- 7.0	- 10.0	- 11.0	- 15.0	- 18.0	- 20.0	- 22.0	- 30.0	- 33.0	- 35.0	- 50.0	
10	B	B	B	B	B	B	B	B	B	B	B	B	B	
15	B	B	B	B	B	B	B	B	B	B	B	B	B	
20	B	B	B	B	B	B	B	B	B	B	B	B	B	
25	B	B	B	B	B	B	B	B	B	B	B	B	B	
32	B	B	B	B	B	B	B	B	B	B	B	B	C	
40	B	B	B	B	B	B	B	B	B	C	C	C	C	
50	B	B	B	B	B	B	C	C	C	C	C	C	-	
65	B	B	B	C	C	C	C	-	-	-	-	-	-	
80	B	B	C	C	-	-	-	-	-	-	-	-	-	
100	B	-	-	-	-	-	-	-	-	-	-	-	-	
150	-	-	-	-	-	-	-	-	-	-	-	-	-	

Code in Table	Part No.	Actuator
B	27521.35B6.6GPO	
C	27521.60A6.6GPO	

Materials	DIN EN	ASTM
1 Body	1.4571	A 240 Grade 316Ti
2 Body	1.4571	A 240 Grade 316Ti
3 Diaphragm	EPDM	
4 Springs	1.7102	AISI 9254
5 Actuator stem	1.4404	A 276 Grade 316L
6 Coupling	1.4571	A 240 Grade 316Ti

Type 27521	Technical data		
Part No. Actuator	27521		
	.35B6.6GPO	.60A6.6GPO	
Diameter Actuator	M	210	310
Height	H	276	309
Height	H1	136	166
Thread	G	1/4" NPT	1/4" NPT
Diaphragm area	cm ²	280	530
Spring rage	bar	0.8 - 3.0	0.8 - 2.8
Minimum air pressure	bar	3.2	3.0
Regulating lift	mm	35	40
Weight	ca. kg	5.0	12.5

Dimensions in mm.

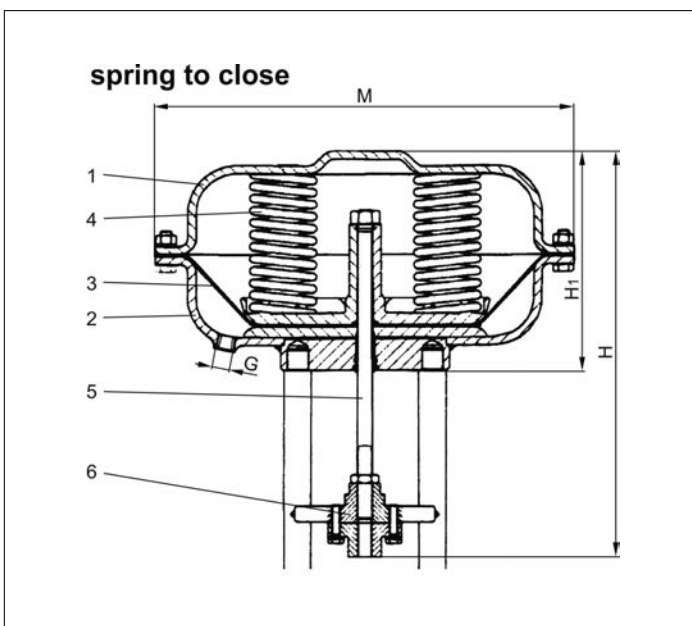

Pneumatic Actuators for Control Valves

Actuator - air to open, **spring to close**

maximum air pressure for operation 6.0 bar g

"cleaned and degreased for oxygen service"

Available options - on request only:

· Pneumatic actuator with override handwheel

Ambient temperature limit: -40°C / -40°F (233K) up to +80°C / 176°F (353K)

Overview - required actuator sizes for differential pressures

DN	Differential pressure in bar															
	0	2.1	4.1	6.1	8.1	10.1	12.1	15.1	17.1	19.1	22.1	25.1	29.1	35.1	39.1	42.1
	2.0	4.0	6.0	8.0	10.0	12.0	15.0	17.0	19.0	22.0	25.0	29.0	35.0	39.0	42.0	50.0
10	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
15	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
20	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
25	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
32	B	B	B	B	B	B	B	B	B	B	C	C	C	C	C	C
40	B	B	B	B	B	B	B	C	C	C	C	C	C	C	C	-
50	B	B	B	B	B	C	C	C	C	C	C	C	C	-	-	-
65	C	C	C	C	C	C	-	-	-	-	-	-	-	-	-	-
80	C	C	C	-	-	-	-	-	-	-	-	-	-	-	-	-
100	C	C	-	-	-	-	-	-	-	-	-	-	-	-	-	-
150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Code in Table	Part No.	Actuator
B	27521.35B6.6GPO	
C	27521.60A6.6GPO	


Materials	DIN EN	ASTM
1 Body	1.4571	A 240 Grade 316Ti
2 Body	1.4571	A 240 Grade 316Ti
3 Diaphragm	EPDM	
4 Springs	1.7102	AISI 9254
5 Actuator stem	1.4404	A 276 Grade 316L
6 Coupling	1.4571	A 240 Grade 316Ti

Type 27521	Technical data		
Part No. Actuator	27521		
	.35B6.6GPO	.60A6.6GPO	
Diameter Actuator	M	210	310
Height	H	276	309
Height	H1	136	166
Thread	G	1/4" NPT	1/4" NPT
Diaphragm area	cm ²	280	530
Spring rage	bar	0.8 - 3.0	0.8 - 2.8
Minimum air pressure	bar	3.2	3.0
Regulating lift	mm	35	40
Weight	ca. kg	5.0	12.5

Dimensions in mm.



spring to close

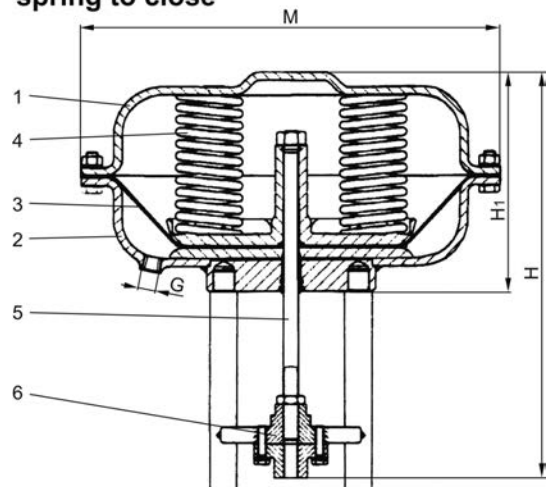

Pneumatic Actuators for Globe Valves (on/off)

Actuator - **spring to open**, air to close

maximum air pressure for operation 6.0 bar g

"cleaned and degreased for oxygen service"

Available options - on request only:

- Pneumatic actuator with override handwheel

Ambient temperature limit: -40°C / -40°F (233K) up to +80°C / 176°F (353K)


Overview - required actuator sizes for differential pressures

DN	Differential pressure in bar											
	0	5.1	7.1	14.1	17.1	19.1	22.1	26.1	29.1	35.1	37.1	45.1
	5.0	7.0	14.0	17.0	19.0	22.0	26.0	29.0	35.0	37.0	45.0	50.0
10	B	B	B	B	B	B	B	B	B	B	B	B
15	B	B	B	B	B	B	B	B	B	B	B	B
20	B	B	B	B	B	B	B	B	B	B	B	B
25	B	B	B	B	B	B	B	B	B	B	B	B
32	B	B	B	B	B	B	B	B	B	B	C	C
40	B	B	B	B	B	B	B	B	C	C	C	C
50	B	B	B	B	B	C	C	C	C	C	C	C
65	B	B	B	C	C	C	C	C	C	C	-	-
80	B	B	C	C	C	C	-	-	-	-	-	-
100	B	C	C	-	-	-	-	-	-	-	-	-
150	-	-	-	-	-	-	-	-	-	-	-	-



Code in Table	Part No. Actuator
B	27522.35B6.6GPS
C	27522.60A6.6GPS

Materials	DIN EN	ASTM
1 Body	1.4571	A 240 Grade 316Ti
2 Body	1.4571	A 240 Grade 316Ti
3 Diaphragm	EPDM	
4 Springs	1.7102	AISI 9254
5 Actuator stem	1.4404	A 276 Grade 316L
6 Coupling	1.4571	A 240 Grade 316Ti

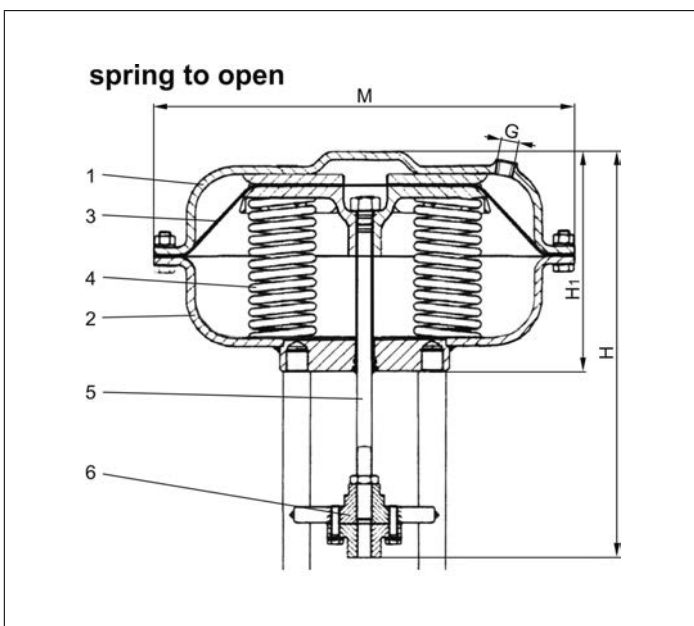

Type 27522	Technical data		
Part No. Actuator	27522		
	.35B6.6GPS	.60A6.6GPS	
Diameter Actuator	M	210	310
Height	H	276	309
Height	H1	136	166
Thread	G	1/4" NPT	1/4" NPT
Diaphragm area	cm ²	280	530
Spring rage	bar	0.8 - 3.0	0.8 - 2.8
Minimum air pressure	bar	6.0	6.0
Regulating lift	mm	35	40
Weight	ca. kg	5.0	12.5

Dimensions in mm.

Pneumatic Actuators for Control Valves

Actuator - **spring to open**, air to close

maximum air pressure for operation 6.0 bar g

"cleaned and degreased for oxygen service"

Available options - on request only:

· Pneumatic actuator with override handwheel

Ambient temperature limit: -40°C / -40°F (233K) up to +80°C / 176°F (353K)

Overview - required actuator sizes for differential pressures


DN	Differential pressure in bar									
	0	5.1	13.1	15.1	21.1	23.1	29.1	34.1	37.1	
	5.0	13.0	15.0	21.0	23.0	29.0	34.0	37.0	50.0	
10	B	B	B	B	B	B	B	B	B	
15	B	B	B	B	B	B	B	B	B	
20	B	B	B	B	B	B	B	B	B	
25	B	B	B	B	B	B	B	B	B	
32	B	B	B	B	B	B	B	B	C	
40	B	B	B	B	B	B	B	C	C	
50	C	C	C	C	C	C	C	C	C	
65	C	C	C	C	C	C	-	-	-	
80	C	C	C	C	-	-	-	-	-	
100	C	C	-	-	-	-	-	-	-	
150	-	-	-	-	-	-	-	-	-	

Code in Table	Part No. Actuator
B	27522.35B6.6GPS
C	27522.60A6.6GPS

Materials	DIN EN	ASTM
1 Body	1.4571	A 240 Grade 316Ti
2 Body	1.4571	A 240 Grade 316Ti
3 Diaphragm	EPDM	
4 Springs	1.7102	AISI 9254
5 Actuator stem	1.4404	A 276 Grade 316L
6 Coupling	1.4571	A 240 Grade 316Ti

Type 27522	Technical data		
Part No. Actuator	27522		
	.35B6.6GPS	.60A6.6GPS	
Diameter Actuator	M	210	310
Height	H	276	309
Height	H1	136	166
Thread	G	1/4" NPT	1/4" NPT
Diaphragm area	cm ²	280	530
Spring rage	bar	0.8 - 3.0	0.8 - 2.8
Minimum air pressure	bar	6.0	6.0
Regulating lift	mm	35	40
Weight	ca. kg	5.0	12.5

Dimensions in mm.

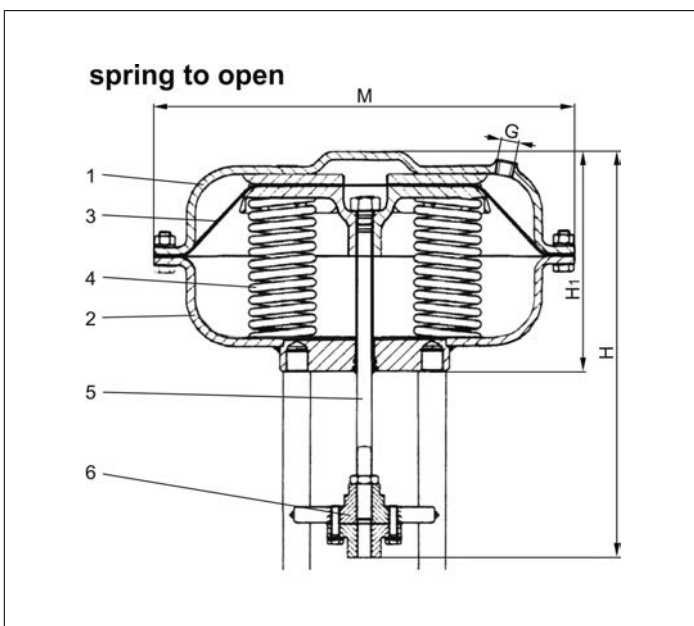

Type 05714 - Check Valve



Cryogenic-Check Valves, PN50 (DN150=PN40)

Stainless steel body and cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05714.X.004*

Butt or Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312
Disc seal: PTFE / Carbon filled (25%)

Part No. 05714.X.005*

Butt or Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312
Disc seal: PTFE

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2 Valve seal from DN65	PTFE	
3 Disc	1.4404	A 276 Grade 316L
4 Spring	1.4571	A 313 Grade 316Ti
5 Bonnet gasket	Graphite	
6 Bolts	1.4571/A4 similar A 194 B8T	
7 Cap	1.4404	A 276 Grade 316L
7a Bush from DN65	PTFE	

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

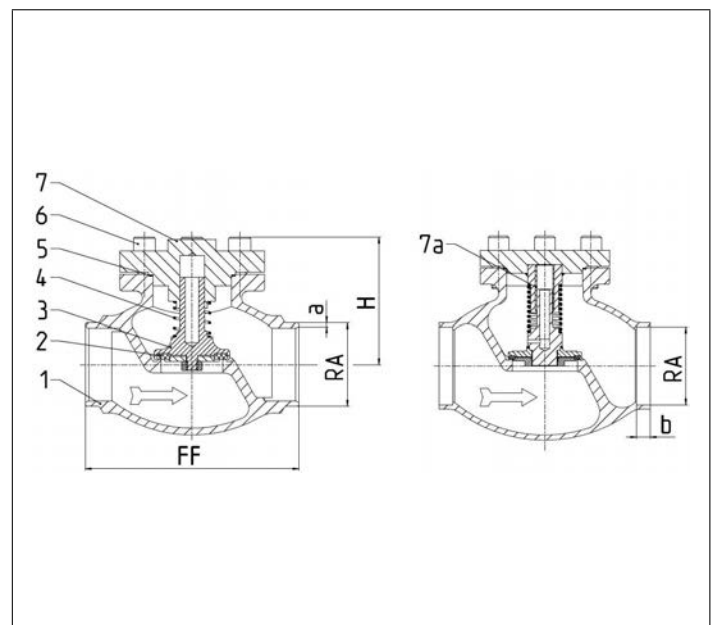

Type 05714 - Standard design	Technical data													
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100	150
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114	0168
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280	400
Height	H	71	71	71	72	75	87	95	95	95	125	150	185	214
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3	168.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0	7.1
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33	73.03	88.90	114.30	168.30
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40												
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20	20
Weight	ca. kg	0.7	0.95	1.0	1.3	1.6	2.4	3.9	3.9	5.7	9.6	14.6	20.0	50.0
Kvs-Value	m³/h	1.6	3.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/mir	1.9	4.4	5.0	7.8	13.4	16.2	23.9	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Offshore Valves

Type 05717 - Check Valve



Cryogenic-Check Valves, PN50

Stainless steel body and cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05717.X.0001

Female thread connection (G) acc. to ISO 228/1

Part No. 05717.X.0006

Female thread connection NPT acc. to ANSI B 1.20.1

Available options - on request only:

· Female thread connection (R) acc. to ISO 7-Rc




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2 Valve seal from DN65	PTFE	
3 Disc	1.4404	A 276 Grade 316L
4 Spring	1.4571	A 313 Grade 316Ti
5 Bonnet gasket	Graphite	
6 Bolts	1.4571/A4	similar A 194 B8T
7 Cap	1.4404	A 276 Grade 316L

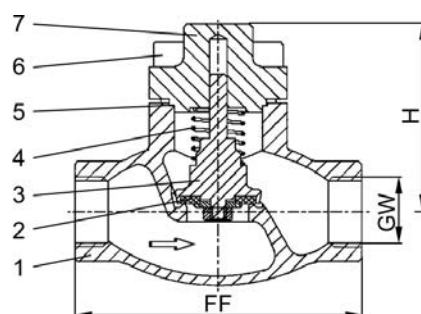

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05717 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	40	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	70	70	85	100	115	130	130	155
Height	H	71	71	71	72	75	95	95	95
Weight	ca. kg	0.7	0.7	1.0	1.3	1.6	3.9	3.9	5.7
Kvs-Value	m ³ /h	1.6	2.2	4.3	6.7	11.5	20.6	22.6	37.1
Cv-Value	gal/min	1.9	2.6	5.0	7.8	13.4	23.9	26.3	43.2

Dimensions in mm.

Cryogenic-Check Valves, PN40

Stainless steel body and cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05719.X.0042

Flanged connection acc. to DIN EN 1092-1 PN40
Disc seal: PTFE / Carbon filled (25%)

Part No. 05719.X.0052


Flanged connection acc. to DIN EN 1092-1 PN40
Disc seal: PTFE



Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4404	A 276 Grade 316L
4 Spring	1.4571	A 313 Grade 316Ti
5 Bonnet gasket	Graphite	
6 Bolts	1.4571/A4 similar A 194 B8T	
7 Cap	1.4404	A 276 Grade 316L
7a Bush from DN65	PTFE	

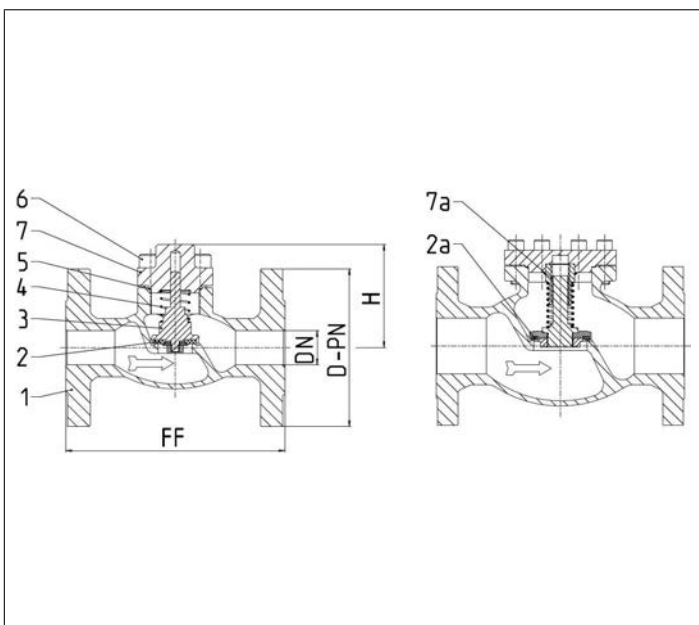

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05719 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	70	75	75	95	90	125	150	165	215
Weight	ca. kg	2.9	3.4	4.4	6.4	11.6	19.2	25.2	39.8	72.7
Kvs-Value	m³/h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Cryogenic-Check Valves, class 300

Stainless steel body and cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05719.X.0043

Flanged connection acc. to ANSI B16.5 class 300
Disc seal: PTFE / Carbon filled (25%)

Part No. 05719.X.0053


Flanged connection acc. to ANSI B16.5 class 300
Disc seal: PTFE



Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4404	A 276 Grade 316L
4 Spring	1.4571	A 313 Grade 316Ti
5 Bonnet gasket	Graphite	
6 Bolts	1.4571/A4 similar A 194 B8T	
7 Cap	1.4404	A 276 Grade 316L
7a Bush from DN65	PTFE	

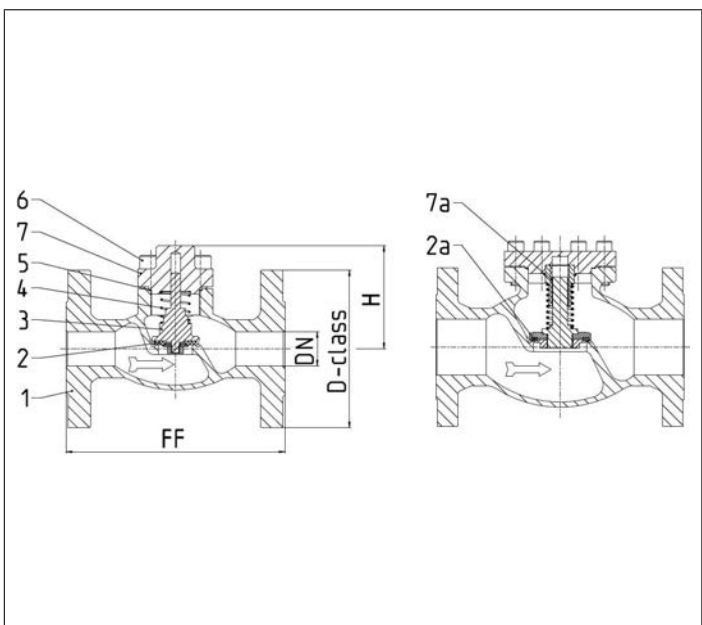

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05719 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	70	75	75	95	90	125	150	165	215
Weight	ca. kg	2.9	3.4	4.4	6.4	11.6	19.2	25.2	39.8	90.3
Kvs-Value	m³/h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Offshore Valves

Type 05719 - Check Valve, ANSI Flanges



Cryogenic-Check Valves, class 150


Stainless steel body and cap
with spring, opening pressure ca. 0.1 bar
"cleaned and degreased for oxygen service"

Part No. 05719.X.0041

Flanged connection acc. to ANSI B16.5 class 150
Disc seal: PTFE / Carbon filled (25%)

Part No. 05719.X.0051


Flanged connection acc. to ANSI B16.5 class 150
Disc seal: PTFE

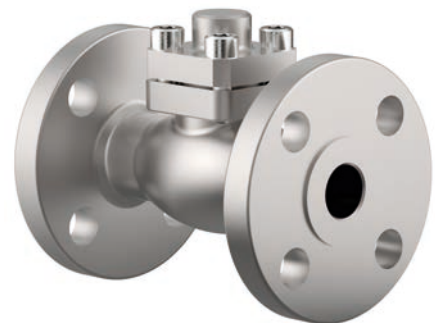

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal up to DN50	PTFE / Carbon filled (25%)	
2a Valve seal from DN65	PTFE	
3 Disc	1.4404	A 276 Grade 316L
4 Spring	1.4571	A 313 Grade 316Ti
5 Bonnet gasket	Graphite	
6 Bolts	1.4571/A4 similar A 194 B8T	
7 Cap	1.4404	A 276 Grade 316L
7a Bush from DN65	PTFE	

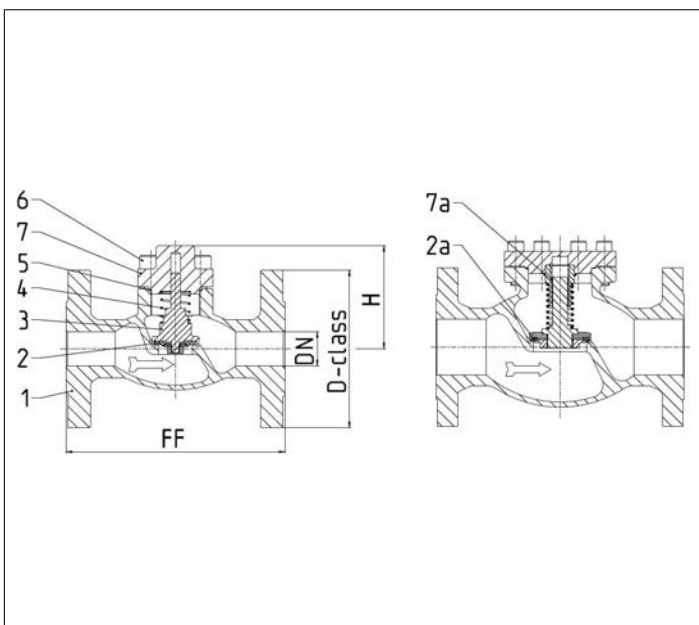

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 05719 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	70	75	75	95	90	125	150	165	215
Weight	ca. kg	2.9	3.4	4.4	6.4	11.6	19.2	25.2	39.8	81.5
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm.

Offshore Valves

Type 08717 - Strainer



Cryogenic-Strainer, PN50

Stainless steel body and cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08717.X.000*

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 08717.X.0004

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Strainer screen	1.4404	A 276 Grade 316L
3 Bonnet gasket	Graphite	
4 Bolts	1.4571/A4 similar A 194 B8T	
5 Cap	1.4404	A 276 Grade 316L

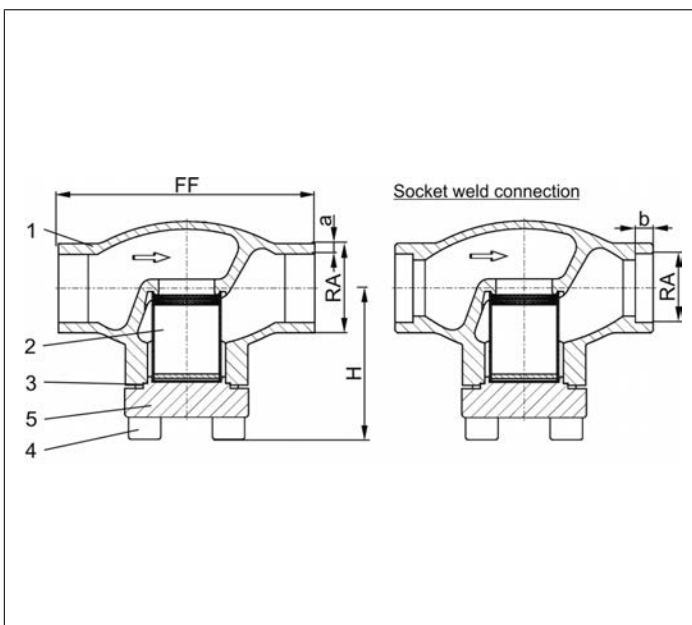

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 08717 - Standard design	Technical data													
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100	150
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114	0168
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280	400
Height	H	62	62	62	65	69	76	89	89	89	125	150	166	215
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3	168.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0	7.1
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33	73.03	88.90	114.3	168.3
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40												
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20	20
Weight	ca. kg	0.6	0.75	0.8	0.9	1.2	1.8	3.1	3.1	4.7	8.9	13.6	18.0	48.0
Kvs-Value	m ³ /h	1.5	3.4	3.4	6.5	9.5	14.0	19.0	21.0	28.0	62.0	90.0	118.0	300.0
Cv-Value	gal/mir	1.7	3.9	3.9	7.5	11.0	16.2	22.0	24.3	32.4	71.7	104.0	136.4	346.8

Dimensions in mm.

Cryogenic-Strainer, PN50

Stainless steel body and cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08716.X.0001

Female thread connection (G) acc. to ISO 228/1

Part No. 08716.X.0006

Female thread connection NPT acc. to ANSI B 1.20.1

Available options - on request only:

- Female thread connection (R) acc. to ISO 7-Rc
- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Strainer screen	1.4404	A 276 Grade 316L
3 Bonnet gasket	Graphite	
4 Bolts	1.4571/A4 similar A 194 B8T	
5 Cap	1.4404	A 276 Grade 316L

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

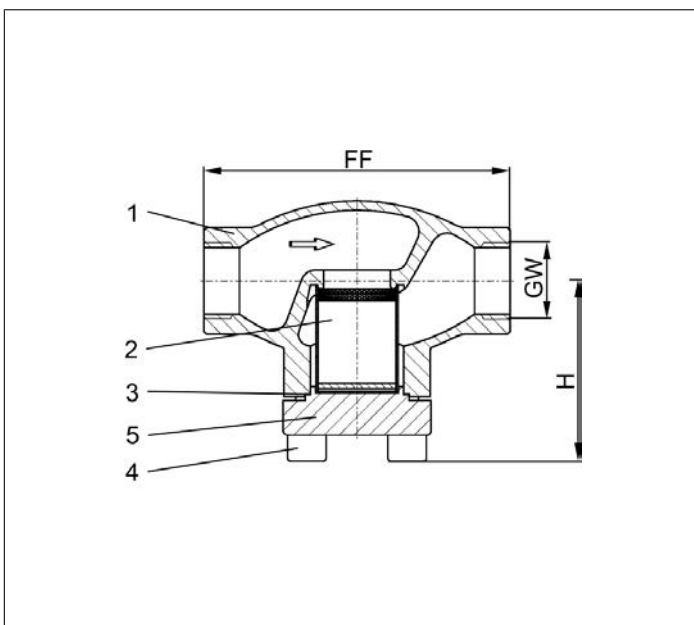

Type 08716 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	40	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	70	70	85	100	115	130	130	155
Height	H	62	62	62	65	69	89	89	89
Weight	ca. kg	0.6	0.6	0.8	0.9	1.2	3.1	3.1	4.7
Kvs-Value	m ³ /h	1.5	1.5	3.4	6.5	9.5	19.0	21.0	28.0
Cv-Value	gal/min	1.7	1.7	3.9	7.5	11.0	22.0	24.3	32.4

Dimensions in mm.

Cryogenic-Strainer, PN40


Stainless steel body and cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08732.X.0002

Flanged connection acc. to DIN EN 1092-1 PN40

Available options - on request only:

- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities

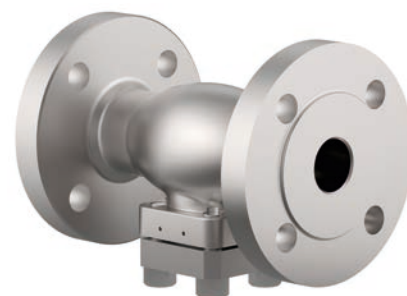


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Strainer screen	1.4404	A 276 Grade 316L
3 Bonnet gasket	Graphite	
4 Bolts	1.4571/A4 similar A 194 B8T	
5 Cap	1.4404	A 276 Grade 316L

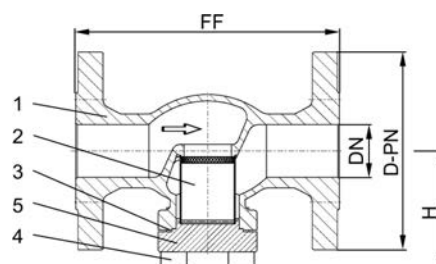

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 08732 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	62	69	69	89	89	125	150	166	212
Weight	ca. kg	2.5	3.0	4.0	5.6	10.6	17.7	23.2	36.8	68.1
Kvs-Value	m ³ /h	4.3	6.7	9.5	21.0	28.0	62.0	90.0	118.0	on request
Cv-Value	gal/min	5.0	7.8	11.0	24.3	32.4	71.7	104.0	136.4	on request

Dimensions in mm.

Cryogenic-Strainer, class 300


Stainless steel body and cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08732.X.0003

Flanged connection acc. to ANSI B16.5 class 300

Available options - on request only:

- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities

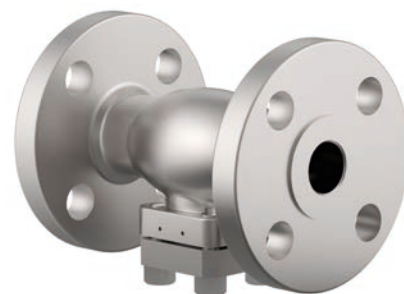


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Strainer screen	1.4404	A 276 Grade 316L
3 Bonnet gasket	Graphite	
4 Bolts	1.4571/A4 similar A 194 B8T	
5 Cap	1.4404	A 276 Grade 316L

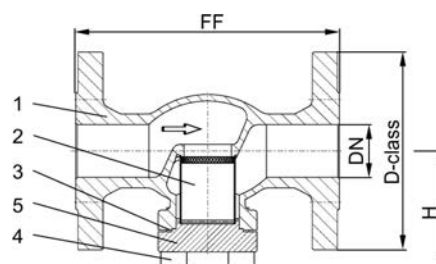

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 08732 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	62	69	69	89	89	125	150	166	212
Weight	ca. kg	2.5	3.0	4.0	5.6	10.6	17.7	23.2	36.8	85.7
Kvs-Value	m³/h	4.3	6.7	9.5	21.0	28.0	62.0	90.0	118.0	on request
Cv-Value	gal/min	5.0	7.8	11.0	24.3	32.4	71.7	104.0	136.4	on request

Dimensions in mm.

Cryogenic-Strainer, class 150


Stainless steel body and cap
with strainer screen mesh size 0.25 mm
"cleaned and degreased for oxygen service"

Part No. 08732.X.0001

Flanged connection acc. to ANSI B16.5 class 150

Available options - on request only:

- other mesh sizes for strainer screen (changed flow coefficient)
- strainer screen in bronze or monel
- sintered filter in bronze or stainless steel in various porosities

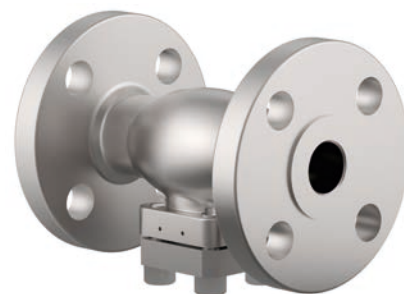


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Strainer screen	1.4404	A 276 Grade 316L
3 Bonnet gasket	Graphite	
4 Bolts	1.4571/A4 similar A 194 B8T	
5 Cap	1.4404	A 276 Grade 316L

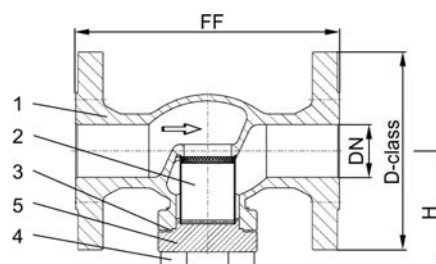

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 08732 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	62	69	69	89	89	125	150	166	212
Weight	ca. kg	2.5	3.0	4.0	5.6	10.6	17.7	23.2	36.8	76.9
Kvs-Value	m³/h	4.3	6.7	9.5	21.0	28.0	62.0	90.0	118.0	on request
Cv-Value	gal/min	5.0	7.8	11.0	24.3	32.4	71.7	104.0	136.4	on request

Dimensions in mm.

Fire Safe and Offshore Valves

Type 01851 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, PN50
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 01851.X.000*

Part No. 01851.X.500* Globe/Check Valve

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01851.X.0004

Part No. 01851.X.5004 Globe/Check Valve

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Valve with control disc (tapered design)



Applications:


Suitable for hydrogen, approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

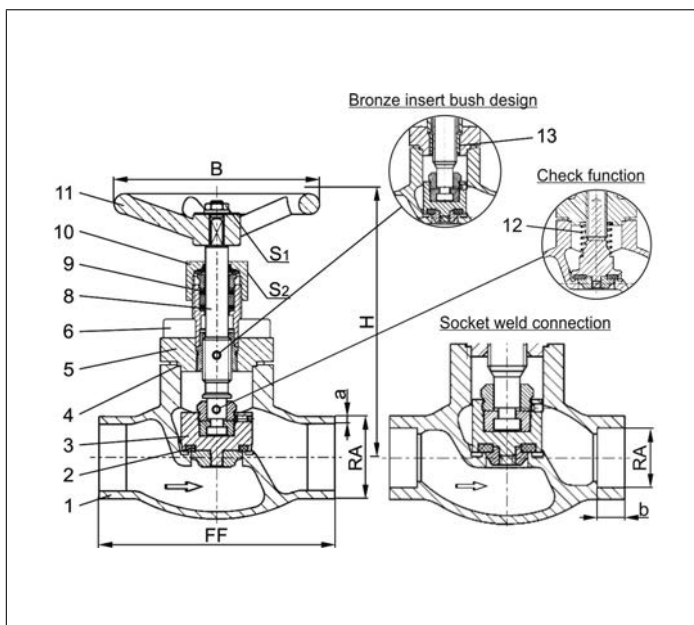

Type 01851 - Standard design	Technical data												
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280
Height	H	140	140	140	140	140	170	175	175	200	260	310	350
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33	73.03	88.90	114.3
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40											
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20
Handwheel-Ø	B	100	100	100	100	100	125	125	125	125	200	250	315
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10	10	10	10	12
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36	36	36	36	41
Weight	ca. kg	1.0	1.25	1.3	1.7	2.0	2.8	4.2	4.2	6.7	10.7	16.0	23.0
Kvs-Value	m ³ /h	1.6	3.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1	71.1	104.0	170.0
Cv-Value	gal/min	1.9	4.4	5.0	7.8	13.4	16.2	23.9	26.3	43.2	82.7	120.9	195.2

Dimensions in mm.

Fire Safe and Offshore Valves

Type 01855 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, PN50
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 01855.X.0001

Part No. 01855.X.5001 Globe/Check Valve

Female thread connection (G) acc. to ISO 228/1

Part No. 01855.X.0006

Part No. 01855.X.5006 Globe/Check Valve

Female thread connection NPT acc. to ANSI B 1.20.1

Available options - on request only:

- Female thread connection (R) acc. to ISO 7-Rc
- Valve with control disc (tapered design)




Applications:

Suitable for hydrogen, approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4 similar A 194 B8T	
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

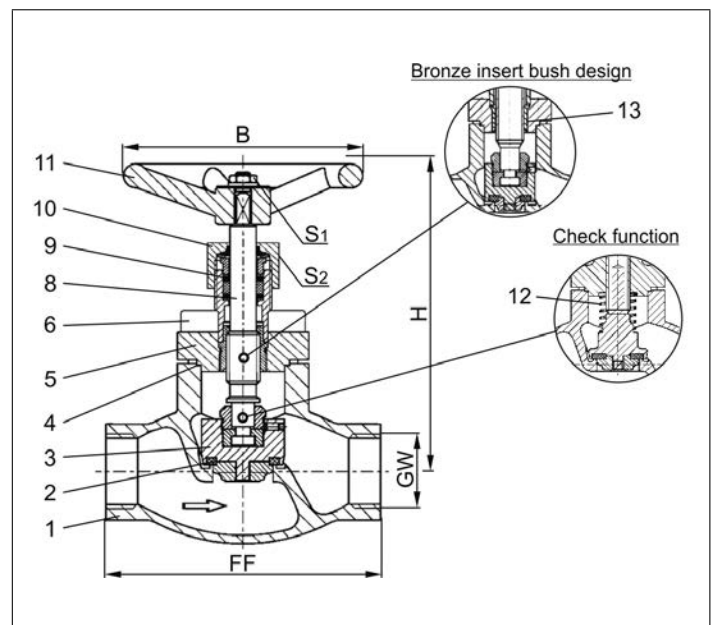

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 01855 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	40	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	70	70	85	100	115	130	130	155
Height	H	140	140	140	140	140	175	175	200
Handwheel-Ø	B	100	100	100	100	100	125	125	125
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36
Weight	ca. kg	1.0	1.0	1.3	1.7	2.0	4.2	4.2	6.7
Kvs-Value	m ³ /h	1.6	2.2	4.3	6.7	11.5	20.6	22.6	37.1
Cv-Value	gal/min	1.9	2.6	5.0	7.8	13.4	23.9	26.3	43.2

Dimensions in mm.



Fire Safe and Offshore Valves

Type 03851 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, PN40
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 03851.X.0002

Part No. 03851.X.5002 Globe/Check Valve

Flanged connection acc. to DIN EN 1092-1 PN40

Available options - on request only:

· Valve with control disc (tapered design)




Applications:

Suitable for hydrogen, approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

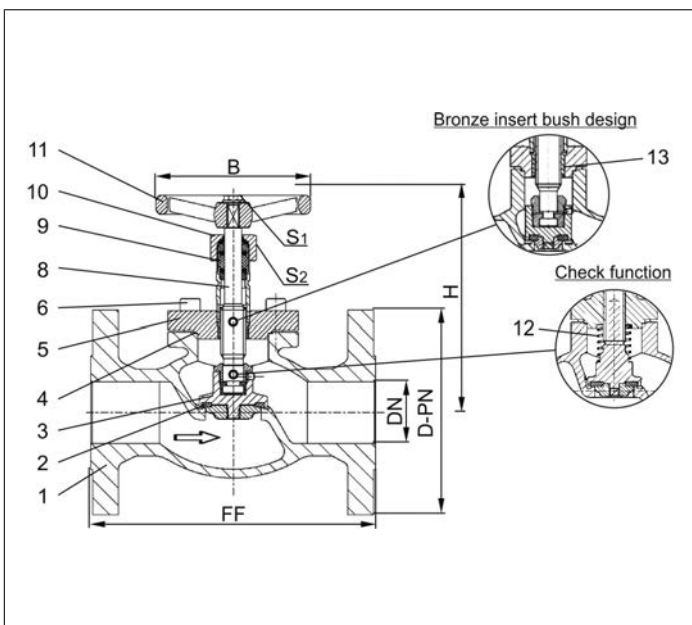

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03851 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	130	130	140	170	200	260	310	350	380
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	4.5	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Fire Safe and Offshore Valves

Type 03851 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, class 300
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 03851.X.0003

Part No. 03851.X.5003 Globe/Check Valve

Flanged connection acc. to ANSI B16.5 class 300

Available options - on request only:

- Valve with control disc (tapered design)




Applications:

Suitable for hydrogen, approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

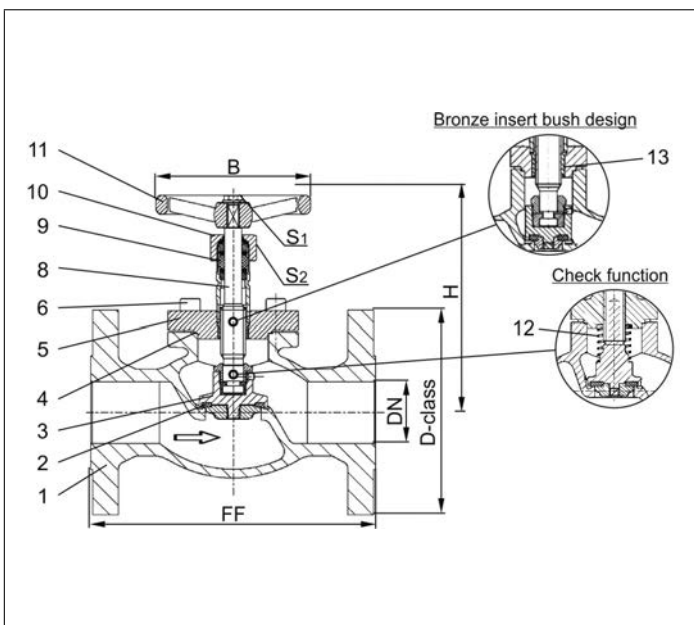

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03851 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	130	130	140	170	200	260	310	350	380
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	4.5	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Fire Safe and Offshore Valves

Type 03851 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, class 150
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 03851.X.0001

Part No. 03851.X.5001 Globe/Check Valve

Flanged connection acc. to ANSI B16.5 class 150

Available options - on request only:

- Valve with control disc (tapered design)




Applications:

Suitable for hydrogen, approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Recommended working temperature: -60°C / -76°F (213K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

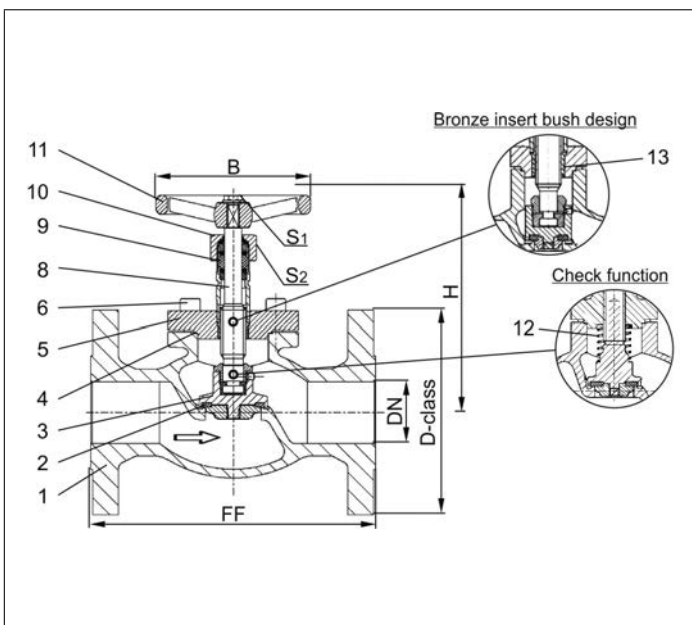

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03851 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	130	130	140	170	200	260	310	350	380
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	4.5	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm.

Fire Safe and Offshore Valves

Type 01841 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, PN50 (DN150=PN40)

“Fire safe” type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
“live loaded” gland packing
“cleaned and degreased for oxygen service”

Part No. 01841.X.001* (H = 270mm)

Part No. 01841.X.002* (H = 370mm)

Part No. 01841.X.501* (H = 270mm) Globe/Check Valve

Part No. 01841.X.502* (H = 370mm) Globe/Check Valve

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01841.X.0014 (H = 270mm)

Part No. 01841.X.0024 (H = 370mm)

Part No. 01841.X.5014 (H = 270mm) Globe/Check Valve

Part No. 01841.X.5024 (H = 370mm) Globe/Check Valve

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)

Applications:


Suitable for hydrogen, approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

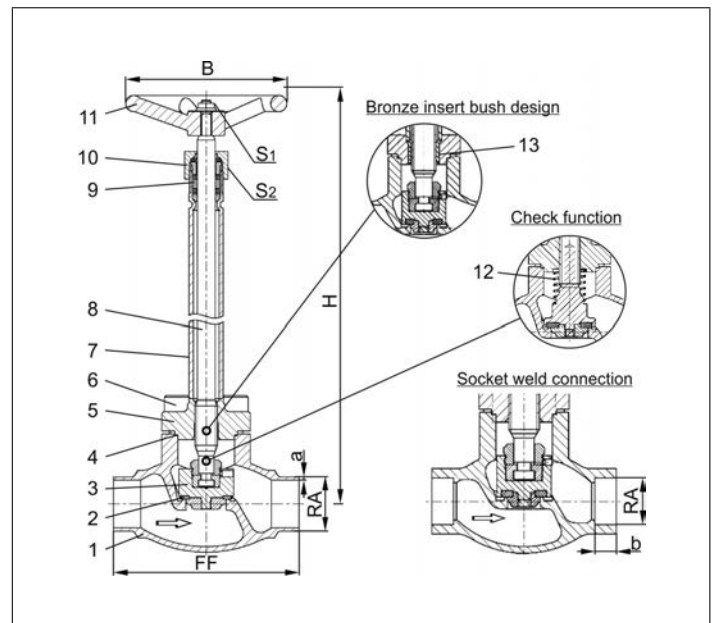

Type 01841 - Standard design	Technical data													
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100	150
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114	0168
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280	400
Height	H	270 mm or 370 mm											370	420
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3	168.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0	7.1
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33	73.03	88.90	114.3	168.3
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40												
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20	20
Handwheel-Ø	B	100	100	100	100	100	125	125	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36	36	36	36	41	41
Weight	ca. kg	1.4	1.65	1.7	2.1	2.4	3.3	4.7	4.7	7.2	12.7	17.0	24.5	54.0
Kvs-Value	m³/h	1.6	3.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	1.9	4.4	5.0	7.8	13.4	16.2	23.9	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Fire Safe and Offshore Valves

Type 01841 - Globe Valve



Cryogenic Globe Valves, DN200, PN25

"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork

"live loaded" gland packing

Part No. 01841.0219.001* (H=560)

Part No. 01841.0219.006* (H=1000)

*Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01841.0219.00*4

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

In flow direction, the valve with the nominal size DN200 is conform to tightness class

L1 up to 9 bar maximum differential pressure acc. to DIN 12567 for LNG use.

This standard can also be used for the tightness class of other cryogenic gases.


Available options - on request only

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
13 Bush	CW452K	B 159 UNS C51900

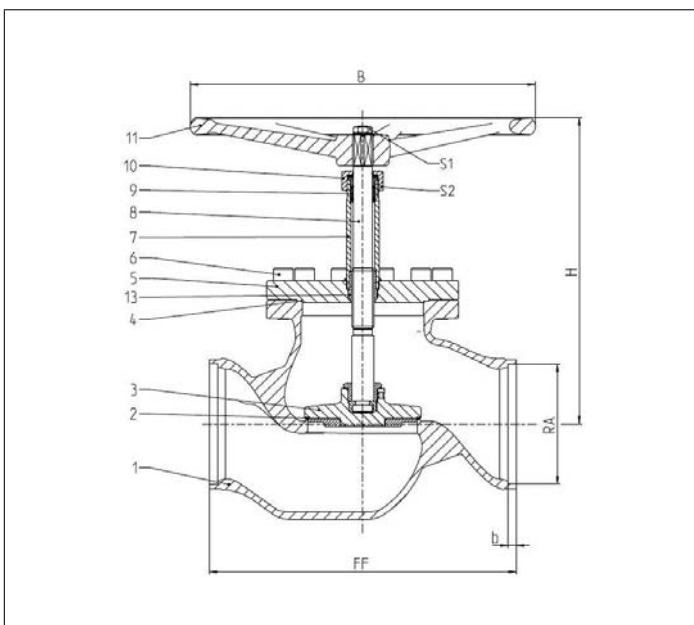

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 01841 - Standard design	Technical data	
Nominal size	DN	200
Dimension code	.X.	0219
Face-to-face dimension	FF	560
Height	H	560
Outside pipe-Ø ISO 1127	RA	219.1
Wall thickness pipe ISO 1127	a	6.3
Outside pipe-Ø ASTM A312	RA	219.1
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40
Socket depth	b	15
Handwheel-Ø	B	630
Wrench size across flats	S ₁	30
Wrench size across flats	S ₂	65
Weight	ca. kg	135
Kvs-Value	m ³ /h	680
Cv-Value	gal/min	786

Dimensions in mm.



Fire Safe and Offshore Valves

Type 01841 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, PN63
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
 "live loaded" gland packing
 "cleaned and degreased"

Part No. 01841.X.001*P63 (H = 270mm)

Part No. 01841.X.002*P63 (H = 370mm)

Part No. 01841.X.501*P63 (H = 270mm) Globe/Check Valve

Part No. 01841.X.502*P63 (H = 370mm) Globe/Check Valve

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01841.X.0014P63 (H = 270mm)

Part No. 01841.X.0024P63 (H = 370mm)

Part No. 01841.X.5014P63 (H = 270mm) Globe/Check Valve

Part No. 01841.X.5024P63 (H = 370mm) Globe/Check Valve

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Extension H up to 900mm
- Valve with control disc (tapered design)

Applications:


Suitable for hydrogen, approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

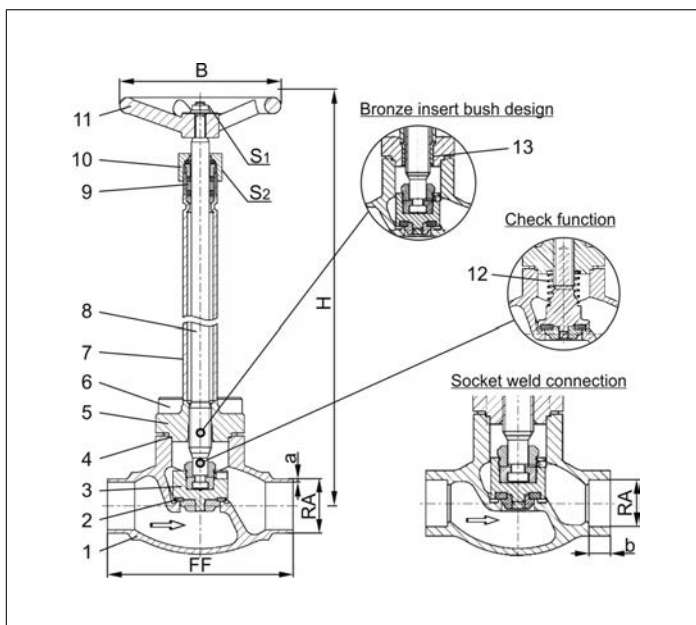

Type 01841 - Standard design	Technical data												
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280
Height	H	270 mm or 370 mm											
Outside pipe-Ø ISO 1127	RA	13.5	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3
Wall thickness pipe ISO 1127	a	1.6	1.6	2.0	2.0	2.0	2.0	2.0	3.6	3.6	3.6	4.0	6.3
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33	73.03	88.90	114.3
Wall thickness pipe ASTM A312	a	dimensions acc. to S40											
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20
Handwheel-Ø	B	100	100	100	100	100	125	125	125	125	200	250	315
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36	36	36	36	41
Weight	ca. kg	1.4	1.65	1.7	2.1	2.4	3.3	4.7	4.7	7.2	12.7	17.0	24.5
Kvs-Value	m ³ /h	1.6	3.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1	71.1	104.0	170.0
Cv-Value	gal/min	1.9	4.4	5.0	7.8	13.4	16.2	23.9	26.3	43.2	82.7	120.9	195.2

Dimensions in mm.

Fire Safe and Offshore Valves

Type 01845 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, PN50
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 01845.X.0011 (H = 270mm)
Part No. 01845.X.0021 (H = 370mm)
Part No. 01845.X.5011 (H = 270mm) Globe/Check Valve
Part No. 01845.X.5021 (H = 370mm) Globe/Check Valve
 Female thread connection (G) acc. to ISO 228/1

Part No. 01845.X.0016 (H = 270mm)
Part No. 01845.X.0026 (H = 370mm)
Part No. 01845.X.5016 (H = 270mm) Globe/Check Valve
Part No. 01845.X.5026 (H = 370mm) Globe/Check Valve
 Female thread connection NPT acc. to ANSI B 1.20.1


Available options - on request only:
 · Female thread connection (R) acc. to ISO 7-Rc
 · Extension H up to 900mm · Valve with control disc (tapered design)

Applications:

Suitable for hydrogen, approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
 Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316 Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment
 Directive 2014/68/EU (PED).

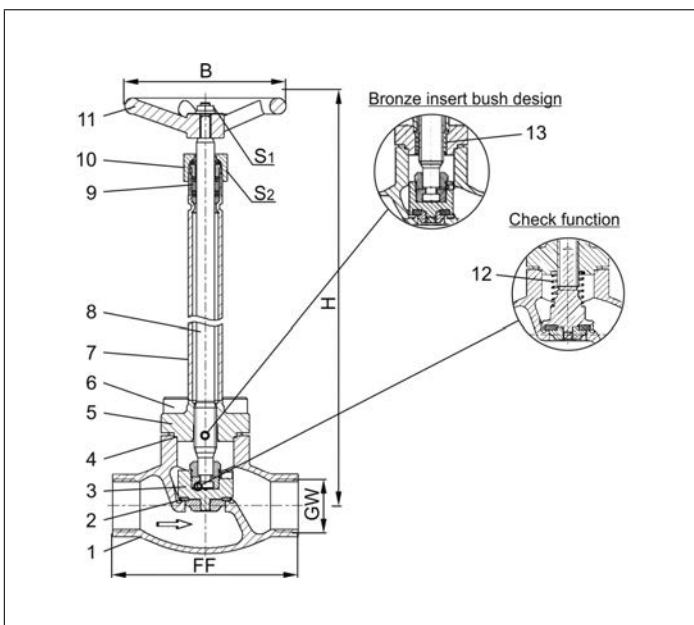

Type 01845 - Standard design	Technical data								
Nominal size	DN	10	10	15	20	25	40	40	50
Thread size	GW	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Dimension code	.X.	0200	0300	0400	0600	1000	1200	1400	2000
Face-to-face dimension	FF	70	70	85	100	115	130	130	155
Height	H	270 mm or 370 mm							
Handwheel-Ø	B	100	100	100	100	100	125	125	125
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36
Weight	ca. kg	1.4	1.4	1.7	2.1	2.4	4.7	4.7	7.2
Kvs-Value	m ³ /h	1.6	2.2	4.3	6.7	11.5	20.6	22.6	37.1
Cv-Value	gal/min	1.9	2.6	5.0	7.8	13.4	23.9	26.3	43.2

Dimensions in mm.

Fire Safe and Offshore Valves

Type 03841 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, PN40
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
 "live loaded" gland packing
 "cleaned and degreased for oxygen service"

Part No. 03841.X.0012 (H = 270mm)
Part No. 03841.X.0022 (H = 370mm)
Part No. 03841.X.5012 (H = 270mm) Globe/Check Valve
Part No. 03841.X.5022 (H = 370mm) Globe/Check Valve
 Flanged connection acc. to DIN EN 1092-1 PN40




Applications:

Suitable for hydrogen, approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
 Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

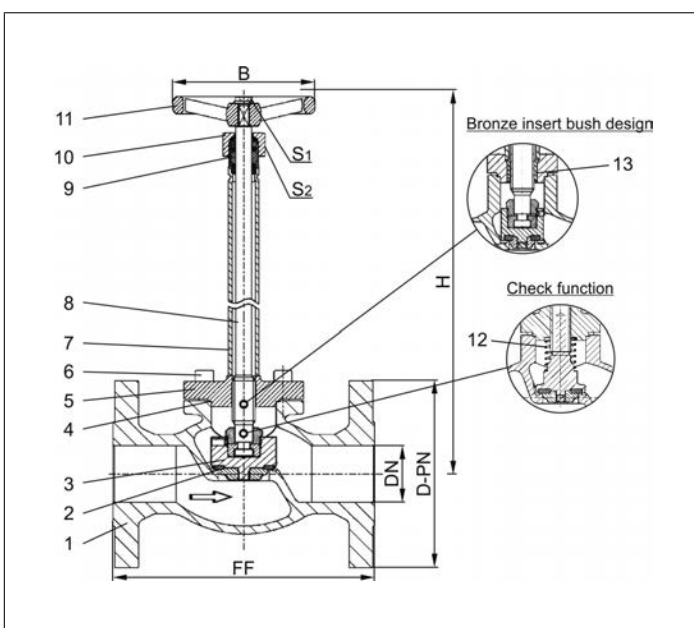

Type 03841 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	270 mm or 370 mm							400	420
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	5.0	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Fire Safe and Offshore Valves

Type 03841 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, class 300

"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03841.X.0013 (H = 270mm)

Part No. 03841.X.0023 (H = 370mm)

Part No. 03841.X.5013 (H = 270mm) Globe/Check Valve

Part No. 03841.X.5023 (H = 370mm) Globe/Check Valve

Flanged connection acc. to ANSI B16.5 class 300




Applications:

Suitable for hydrogen, approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

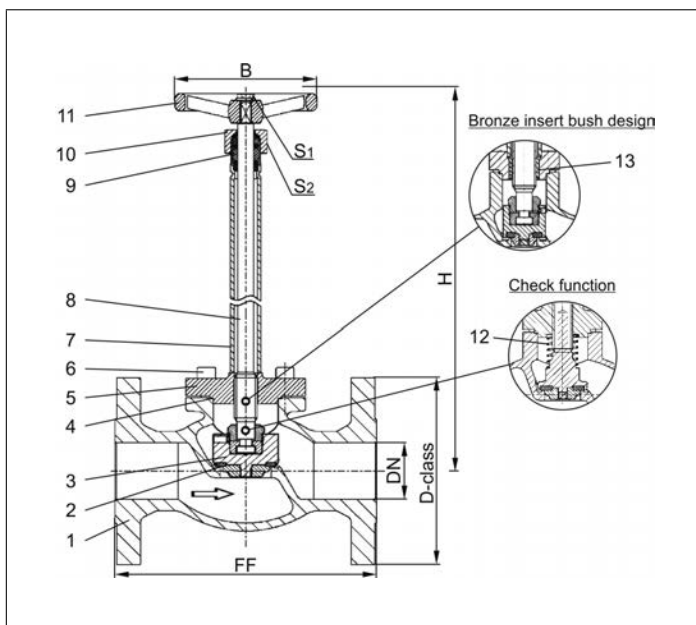

Type 03841 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	270 mm or 370 mm							400	420
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	5.0	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Fire Safe and Offshore Valves

Type 03841 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, class 150

"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 03841.X.0011 (H = 270mm)

Part No. 03841.X.0021 (H = 370mm)

Part No. 03841.X.5011 (H = 270mm) Globe/Check Valve

Part No. 03841.X.5021 (H = 370mm) Globe/Check Valve

Flanged connection acc. to ANSI B16.5 class 150




Applications:

Suitable for hydrogen, approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

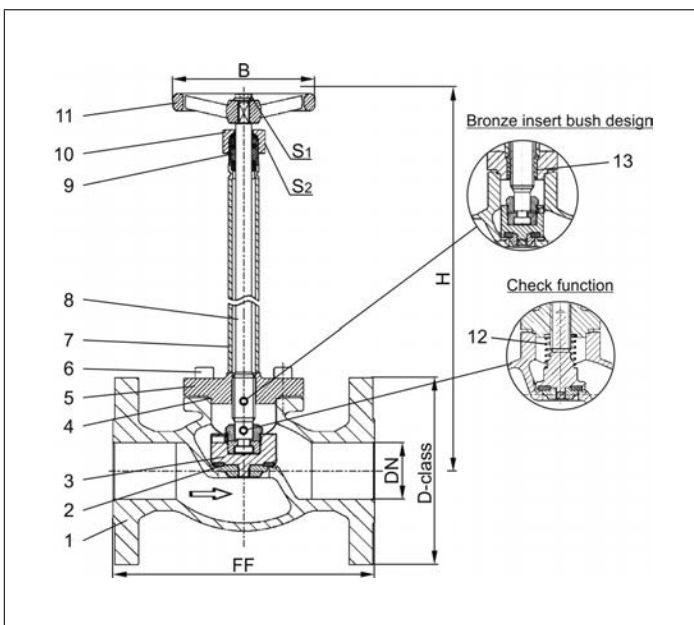

Type 03841 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	270 mm or 370 mm							400	420
Handwheel-Ø	B	100	100	100	125	125	200	250	315	360
Wrench size across flats	S ₁	7	7	7	10	10	10	10	12	15
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight	ca. kg	3.0	3.5	5.0	9.0	13.0	21.0	28.0	42.0	83.0
Kvs-Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv-Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8

Dimensions in mm.

Fire Safe and Offshore Valves

Type 03841 - Globe Valve



Cryogenic-Globe and Globe/Check Valves, class 150
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork,
 "live loaded" gland packing

Part No. 03841.8000.0011 (H=560)

Flanged connection acc. to ANSI B16.5 class 150

In flow direction, the valve with the nominal size DN200 is conform to tightness class L1 up to 12 bar maximum differential pressure acc. to DIN 12567 for LNG use.
 This standard can also be used for the tightness class of other cryogenic gases.

Available options - on request only




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
1a Flange	1.4404	A 276 Grade 316L
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4 similar A 194 B8T	
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Handwheel	1.4409	A 351 CF3M
12 Spring	1.4571	A 313 Grade 316Ti
13 Bush	CW452K	B 159 UNS C51900

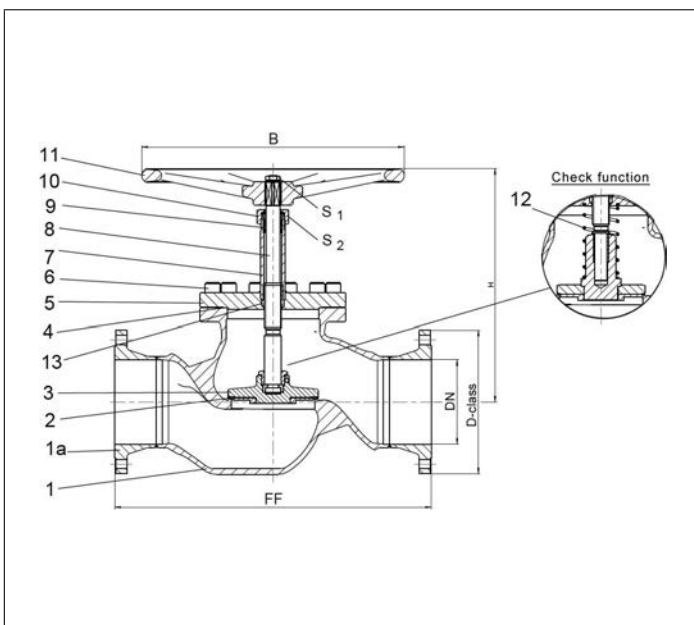

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 03841 - Standard design	Technical data	
Nominal size	DN	200
Dimension code	.X.	8000
Flange-Ø	D-class	345
Face-to-face dimension	FF	760
Height	H	560
Handwheel-Ø	B	630
Wrench size across flats	S ₁	30
Wrench size across flats	S ₂	65
Weight	ca. kg	135
Kvs-Value	m ³ /h	680
Cv-Value	gal/min	786

Dimensions in mm.

Fire Safe and Offshore Valves

Type 01282 - Bellow Sealed Globe Valve



"Fire Safe"-design without fire type-testing according to EN ISO 10497

Cryogenic-Bellow Sealed Globe Valve, PN50

Stainless steel body and topwork,

"live loaded" gland packing

"cleaned and degreased for oxygen service"

Part No. 01282.X.002*

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01282.X.0024

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Extension H up to 900mm

Applications:

Suitable for hydrogen, approved for air gases, vapours and cryogenic liquefied gases incl. LNG.


Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Leak rate: 10^{-6} mbar ltr / sec outside, 10^{-4} mbar ltr / sec seat



Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bellow stem	1.4571	A 313 Grade 316Ti
7 Bolts	1.4571/A4	similar A 194 B8T
8 Bellow	1.4571	A 313 Grade 316Ti
9 Elongation tube	1.4571	A 313 Grade 316Ti
10 Headpiece	1.4404	A 276 Grade 316L
11 Bush	CW452K	B 159 UNS C51900
12 Stem	1.4404	A 276 Grade 316L
13 Gland packing	Graphite / PTFE / MICA	
14 Gland nut	1.4404	A 276 Grade 316L
15 Handwheel	1.4409	A 351 CF3M

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

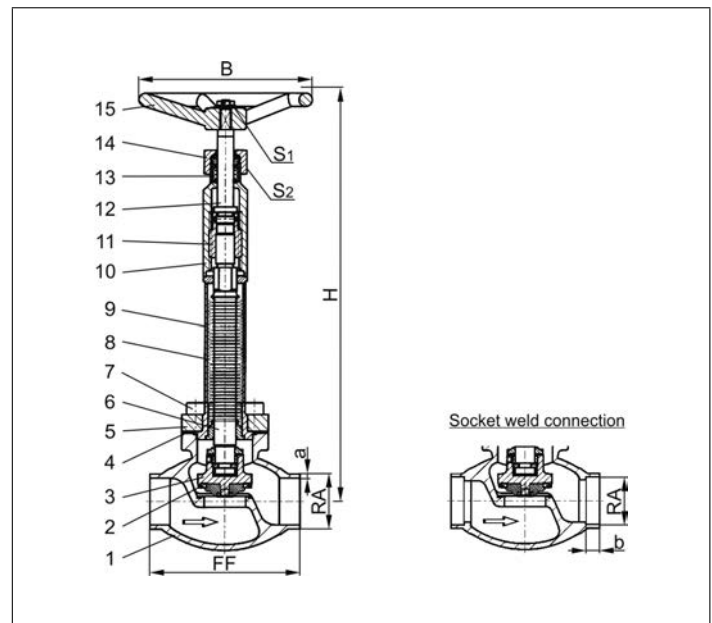

Type 01282 - Standard design	Technical data									
Nominal size	DN	10	15	15	20	25	32	40	40	50
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155
Height	H	380	380	380	380	380	380	380	380	380
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40								
Socket depth	b	6	10	10	13	13	-	13	13	16
Handwheel-Ø	B	150	150	150	150	150	150	150	150	150
Wrench size across flats	S ₁	7	7	7	7	7	10	10	10	10
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36	36
Weight	ca. kg	1.6	1.85	1.9	2.3	2.7	3.6	5.1	5.1	7.7
Kvs-Value	m ³ /h	1.6	2.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1
Cv-Value	gal/min	1.9	3.3	5.0	7.8	13.4	16.2	26.3	26.3	43.2

Dimensions in mm.

Fire Safe and Offshore Valves

Type 01843 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN50 (DN150=PN40)
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork
 Actuator - air opens, spring closes
 "live loaded" gland packing
 "cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 01843.X.*01*

Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01843.X.*014

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available accessories:

- Solenoid valve · Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Actuator "cleaned and degreased for oxygen service"

Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

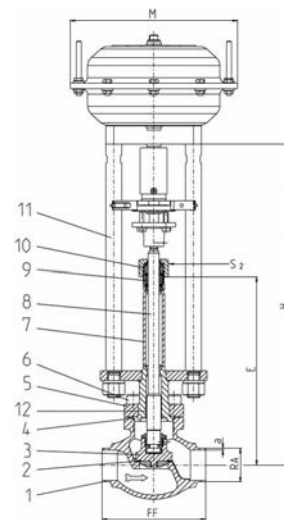

Type 01843 - Standard design		Technical data													
Nominal size	DN	10	15	15	20	25	32	40	40	50	65	80	100	150	
Dimension code	.X.	1012	1517	1521	2026	2533	3238	4042	4048	5060	657x	8088	0114	0168	
Face-to-face dimension	FF	70	85	85	100	115	115	130	130	155	205	245	280	400	
Height	H	370	370	370	370	375	405	420	420	425	510	575	635	685	
Length	E	195	195	195	200	200	230	230	230	235	300	300	300	300	
Outside pipe-Ø ISO 1127	RA	12.0	17.2	21.3	26.9	33.7	38.0	42.4	48.3	60.3	76.1	88.9	114.3	168.3	
Wall thickness pipe ISO 1127	a	1.0	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2	6.0	7.1	
Outside pipe-Ø ASTM A312	RA	13.72	17.15	21.34	26.67	33.40	-	42.16	48.26	60.33	73.03	88.90	114.3	168.3	
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40													
Socket depth	b	6	10	10	13	13	-	13	13	16	16	16	20	20	
Actuator-Ø	M	dependent on actuator													
Wrench size across flats	S ₂	30	30	30	30	30	36	36	36	36	36	36	41	41	
Weight w/o actuator	ca. kg	1.9	2.15	2.2	2.4	3.1	3.8	6.5	6.5	9.0	15.2	20.0	28.0	60.9	
Kvs-Value	m ³ /h	1.6	3.8	4.3	6.7	11.5	14.0	20.6	22.6	37.1	71.1	104.0	170.0	350.0	
Cv-Value	gal/min	1.9	4.4	5.0	7.8	13.4	16.2	23.9	26.3	43.2	82.7	120.9	195.2	401.8	
Stroke	mm	10	10	10	7	9	9	11	11	15	23	23	30	40	

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Fire Safe and Offshore Valves

Type 01843 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN25
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork
 Actuator - air opens, spring closes or contrary
 "live loaded" gland packing

Part No. 01843.0219.*01*

Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01843.0219.*014

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

In flow direction, the valve with the nominal size DN200 is conform to tightness class L1 up to 18 bar maximum differential pressure acc. to DIN 12567 for LNG use.
 This standard can also be used for the tightness class of other cryogenic gases.

Available accessories/options - on request only:


- Solenoid valve · Limit switch · Electropneumatic positioner etc.
- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312
- Actuator "cleaned and degreased for oxygen service"
- Valve with check or control disc (tapered design)

Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
 Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4 similar A 194 B8T	
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

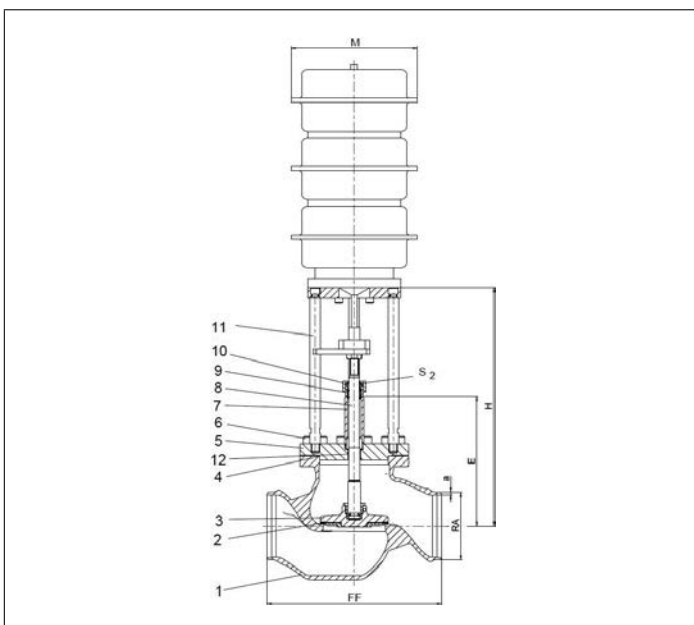

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 01843 - Standard design	Technical data	
Nominal size	DN	200
Face-to-face dimension	FF	560
Height	H	785
Length	E	410
Outside pipe-Ø ISO 1127	RA	219.1
Wall thickness pipe ISO 1127	a	6.3
Outside pipe-Ø ASTM A312	RA	219.1
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40
Socket depth	b	15
Actuator-Ø	M	depend on actuator
Wrench size across flats	S ₂	65
Weight w/o actuator	ca. kg	165.0
Kvs-Value	m ³ /h	680.0
Cv-Value	gal/min	786.0
Stroke	mm	60

Dimensions in mm.



Fire Safe and Offshore Valves

Type 03843 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN16
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork

Actuator - air opens, spring closes or vice versa

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03843.X.*014

Flanged connection acc. to DIN EN 1092-1 PN16

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

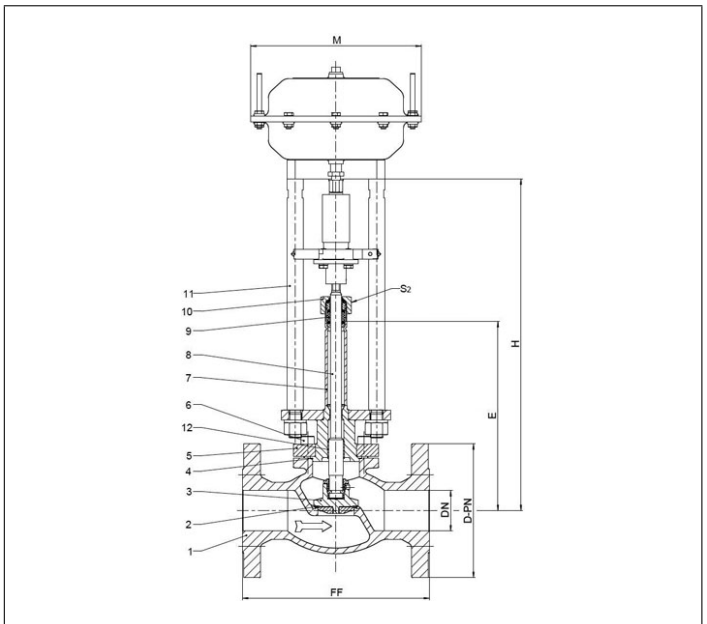

Type 03843 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN16	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	220	285
Face-to-face dimension	FF	140	150	160	200	230	295	310	350	510
Height	H	370	370	375	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	350
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	87.0
Kvs - Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv - Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	40

Abmessungen in mm.

Fire Safe and Offshore Valves

Type 03843 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, PN40
" Fire safe " type test approval acc. to EN ISO 10497

Stainless steel body and topwork

Actuator - air opens, spring closes or vice versa

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03843.X.*012

Flanged connection acc. to DIN EN 1092-1 PN40

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - " cleaned and degreased for oxygen service "
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

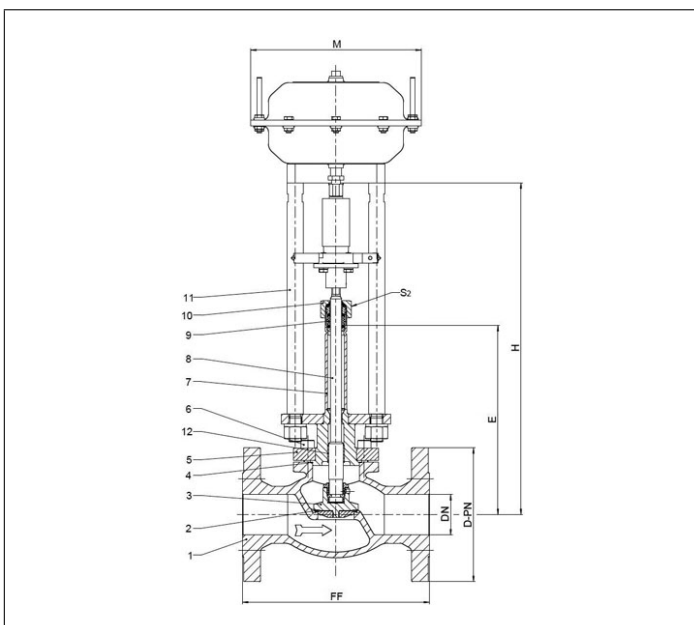

Type 03843 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange EN 1092-1 PN40	.X.	0150	0200	0250	0400	0500	0650	0800	1000	1500
Flange-Ø	D-PN	95	105	115	150	165	185	200	235	300
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	550
Height	H	370	370	375	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	350
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	100.0
Kvs - Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv - Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	40

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Fire Safe and Offshore Valves

Type 03843 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, class 300
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork

Actuator - air opens, spring closes or vice versa

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03843.X.*013

Flanged connection acc. to ANSI B16.5 class 300

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

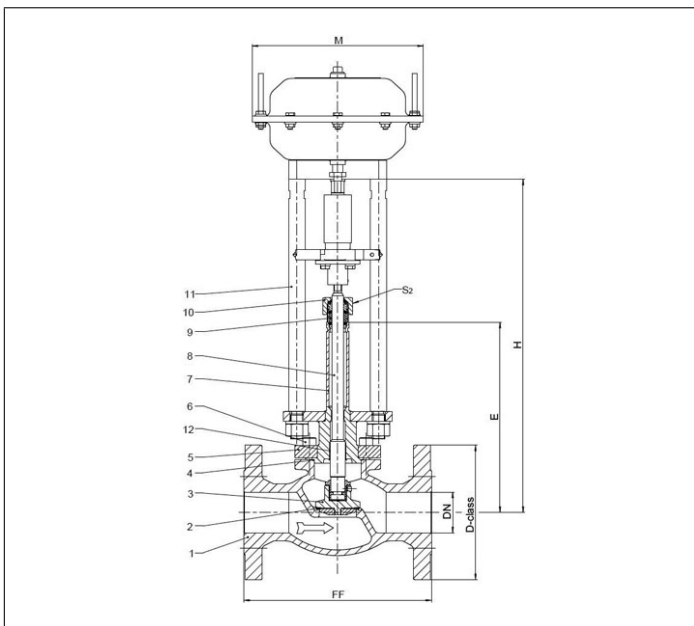

Type 03843 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 300	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	95	115	125	155	165	190	210	255	320
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	597
Height	H	370	370	375	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	300
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	100.0
Kvs - Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv - Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	40

Dimensions in mm. Compliance of tightness requirements acc. to EN 1626 for DN150 up to 20 bar differential pressure. In the range of >20-40 bar, 350-700ml (1 bar, 20°C [68°F]) are reached.

Fire Safe and Offshore Valves

Type 03843 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, class 150
" Fire safe " type test approval acc. to EN ISO 10497

Stainless steel body and topwork

Actuator - air opens, spring closes or vice versa

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

Part No. 03843.X.*011

Flanged connection acc. to ANSI B16.5 class 150

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check disc
- Valve with control disc (tapered design)




Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194 B8T
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

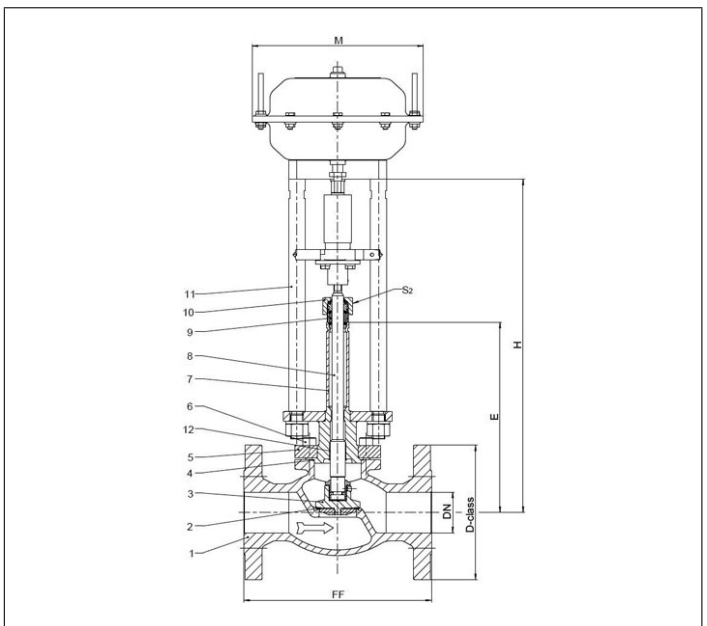

Type 03843 - Standard design	Technical data									
Nominal size	DN	15	20	25	40	50	65	80	100	150
Dimension code - Flange ANSI B16.5 class 150	.X.	0400	0600	1000	1400	2000	2400	3000	4000	6000
Flange-Ø	D-class	90	100	110	125	150	180	190	230	280
Face-to-face dimension	FF	140	150	160	200	230	290	310	350	577
Height	H	370	370	375	420	425	510	575	635	685
Length	E	195	200	200	230	235	300	300	300	300
Actuator-Ø	M	dependent on actuator								
Wrench size across flats	S ₂	30	30	30	36	36	36	36	41	41
Weight w/o actuator	ca. kg	4.6	6.5	8.5	12.0	16.0	30.0	36.0	53.0	87.0
Kvs - Value	m ³ /h	4.3	6.7	11.5	22.6	37.1	71.1	104.0	170.0	350.0
Cv - Value	gal/min	5.0	7.8	13.4	26.3	43.2	82.7	120.9	195.2	401.8
Stroke	mm	10	7	9	11	15	23	23	30	40

Abmessungen in mm.



Fire Safe and Offshore Valves

Type 03843 - Actuated Globe Valve



Cryogenic-Globe Valves with Pneumatic Actuator, class 150
"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel body and topwork
 Actuator - air opens, spring closes or contrary
 "live loaded" gland packing

Artikel-Nr. 03843.8000.X

Flanged connection acc. to ANSI B16.5 class 150

In flow direction, the valve with the nominal size DN200 is conform to tightness class L1 up to 18 bar maximum differential pressure acc. to DIN 12567 for LNG use.
 This standard can also be used for the tightness class of other cryogenic gases.

Available accessories:

- Solenoid valve
- Limit switch
- Electropneumatic positioner etc.

Available options - on request only:

- Actuator - "cleaned and degreased for oxygen service"
- Electric actuator
- Valve with check or control disc (tapered design)


Applications:

Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.
 Working temperature: -196°C / -321°F (77K) up to +120°C / +248°F (393K)



Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
1a Flange	1.4404	A 276 Grade 316L
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4 similar A 194 B8T	
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Gland packing	Graphite / PTFE / MICA	
10 Gland nut	1.4404	A 276 Grade 316L
11 Pillars	1.4404	A 276 Grade 316L
12 Bush	CW452K	B 159 UNS C51900

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

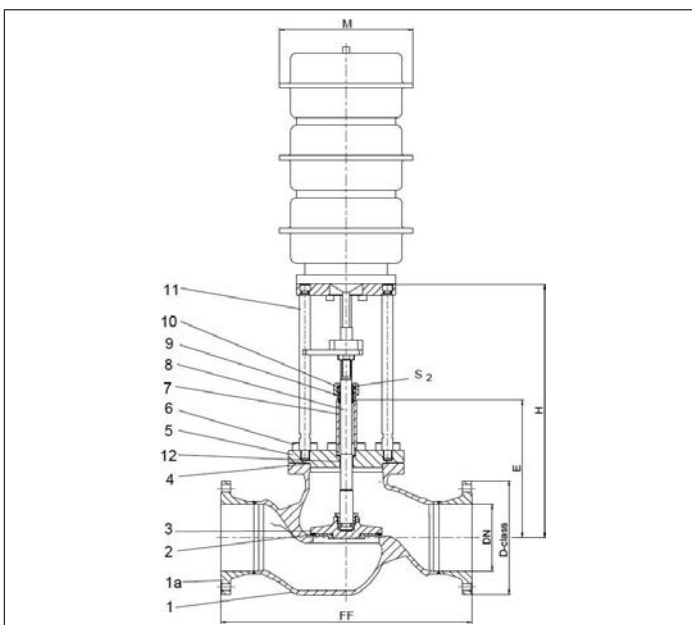

Type 03843 - Standard design	Technical data	
Nominal size	DN	200
Dimension code	.X.	8000
Flange-Ø	D-class	345
Face-to-face dimension	FF	760
Height	H	785
Length	E	410
Actuator-Ø	M	dependent on actuator
Wrench size across flats	S ₂	30
Weight w/o actuator	ca. kg	135
Kvs-Value	m ³ /h	680
Cv-Value	gal/min	786
Stroke	mm	60

Dimensions in mm.

Fire Safe and Offshore Valves

Type 01853 - Actuated Trailervalue



Cryogenic-Globe Valves with Pneumatic Actuator, PN50
"Fire safe" type test approval acc. to EN ISO 10497

air pressure for operation 6.0 bar g (maximum 10.0 bar g), push-in connection 8mm

Stainless steel body and topwork,

Actuator - air opens, spring closes

"live loaded" gland packing

"cleaned and degreased for oxygen service" - the actuator is not cleaned and degreased for oxygen

maximum working pressure of the valve depending on nominal size

Part No. 01853.X.T0**

* Butt weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Part No. 01853.X.T0*4

Socket weld connection for stainless steel pipes acc. to ISO 1127 or ASTM A312

Available options - on request only:

- Welded stainless steel stubs acc. to ISO 1127 or ASTM A312 - length FF + 200mm
- Weather protection hood



Applications:


Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.

Working temperature: -255°C / -427°F (18K) up to +120°C / +248°F (393K)

Ambient temperature actuator: -50°C / -58°F (223K) up to +70°C / +158°F (343K)

Materials	DIN EN	ASTM
1 Body	1.4409	A 351 CF3M
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	1.4404	A 276 Grade 316L
4 Bonnet gasket	Graphite	
5 Headpiece	1.4404	A 276 Grade 316L
6 Bolts	1.4571/A4	similar A 194
7 Elongation tube	1.4571	A 213 TP 316Ti
8 Stem	1.4404	A 276 Grade 316L
9 Spring	1.4571	A 313 Grade 316Ti
10 Flange	1.4404	A 276 Grade 316L
11 Headpiece	1.4404	A 276 Grade 316L
12 Gland packing	Graphite / PTFE / MICA	
13 Gland nut	1.4571	A 313 Grade 316Ti
14 Pillars	1.4404	A 276 Grade 316L
15 Bush	CW452K	B 159 UNS C51900
16 Actuator	Rubber	

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).

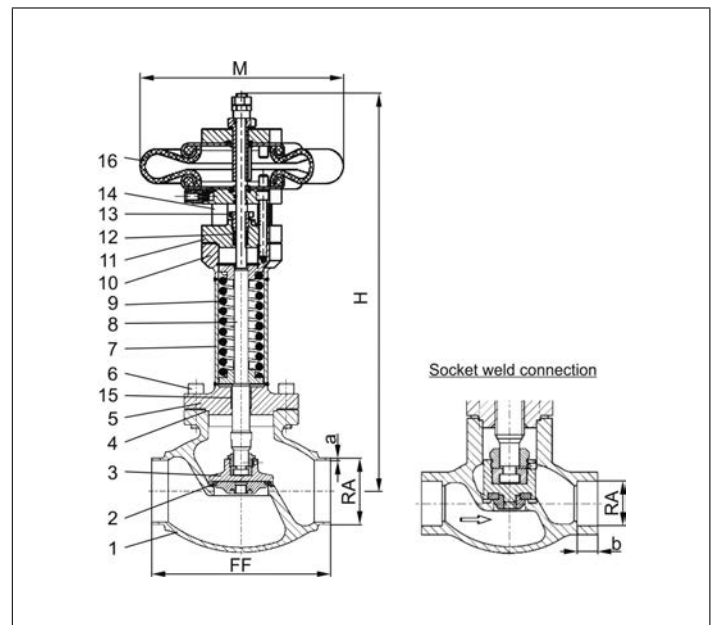

Type 01853 - Standard design	Technical data								
Nominal size	DN	20	20	25	40	40	50	65	80
Dimension code	.X.	2021	2026	2533	4042	4048	5060	657x	8088
Face-to-face dimension	FF	100	100	115	130	130	155	205	245
Height	H	395	395	444	441	441	420	470	500
Outside pipe-Ø ISO 1127	RA	21.3	26.9	33.7	42.4	48.3	60.3	76.1	88.9
Wall thickness pipe ISO 1127	a	2.0	2.0	2.0	2.0	2.0	2.0	2.6	3.2
Outside pipe-Ø ASTM A312	RA	21.34	26.67	33.40	42.16	48.26	60.33	73.03	88.90
Wall thickness pipe ASTM A312	a	dimensions acc. to S10 or S40							
Socket depth	b	10	10	13	13	13	16	16	16
Actuator-Ø	M	229	229	229	229	229	229	229	229
Weight	ca. kg	7.2	7.2	9.1	10.5	10.5	14.5	17.4	22.5
Kvs-Value	m³/h	4.3	4.3	11.5	22.6	22.6	37.1	71.1	104.0
Cv-Value	gal/min	5.0	5.0	13.4	23.9	26.3	43.2	82.7	120.9
Stroke	mm	10	10	9	11	11	15	23	23
Δ P max	bar	50	50	50	16	16	10	3	4
Δ P max with special spring	bar	-	-	-	31	31	18	10	-

Dimensions in mm.

Spare Parts for Fire Safe and Offshore Applications

Type 28651 - Topwork

for Cryogenic-Globe and Globe/Check Valves

"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel topwork,

"live loaded" gland packing

"cleaned and degreased for oxygen service"

Part No. 28651.X.0000


Part No. 28651.X.5000 with check function

suitable for:

Type	Nominal size
01651	DN10 - DN100
01655	DN10 - DN50
03651	DN25 - DN150



Materials	DIN EN	ASTM
1 Valve seal	PTFE / Carbon filled (25%)	
2 Disc	1.4301	A 276 Grade 304
3 Bonnet gasket	Graphite	
4 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
5 Bolts	1.4301/A2	A 194 B8
6 Stem	1.4301	A 276 Grade 304
7 Gland packing	Graphite / PTFE / MICA	
8 Gland nut	1.4305	A 276 Grade 303
9 Handwheel	1.4409	A 351 CF3M
10 Spring	1.4310	A 313 Grade 301
11 Bush	CW452K	B 159 UNS C51900

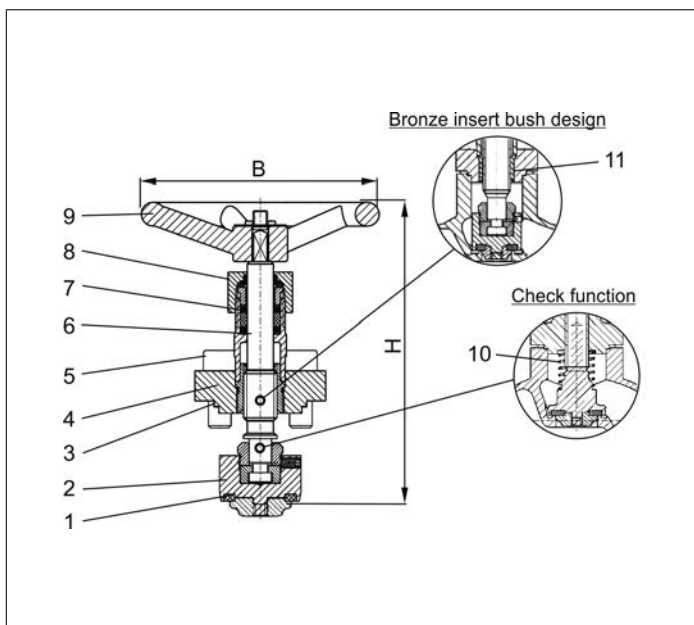

Type 28651	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Height	H	130	130	130	130	155	160	185	240	285	320	380
Nimber of bolts		4	4	4	4	4	4	6	6	6	6	12
Handwheel-Ø	B	100	100	100	100	125	125	125	200	250	315	360
Weight	ca. kg	0.6	0.7	0.95	1.0	1.5	1.9	2.7	4.8	5.9	8.4	18.0

Dimensions in mm.



Spare Parts for Fire Safe and Offshore Applications

Type 28641 - Topwork

for Cryogenic-Globe and Globe/Check Valves

"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel topwork,

"live loaded" gland packing

"cleaned and degreased for oxygen service"

Part No. 28641.X.0010 (H=270mm)

Part No. 28641.X.0020 (H=370mm)


Part No. 28641.X.5010 (H=270mm) with check function

Part No. 28641.X.5020 (H=370mm) with check function

suitable for:

Type	Nominal size
01641	DN10 - DN150
01645	DN10 - DN50
03641	DN25 - DN150

Materials	DIN EN	ASTM
1 Valve seal	PTFE / Carbon filled (25%)	
2 Disc	1.4301	A 276 Grade 304
3 Bonnet gasket	Graphite	
4 Headpiece	1.4301 / 1.4308	A 276 Grade 304 / A 351 CF8
5 Bolts	1.4301/A2	A 194 B8
6 Elongation tube	1.4541	A 213 TP 321
7 Stem	1.4301	A 276 Grade 304
8 Gland packing	Graphite / PTFE / MICA	
9 Gland nut	1.4305	A 276 Grade 303
10 Handwheel	1.4409	A 351 CF3M
11 Spring	1.4310	A 313 Grade 301
12 Bush	CW452K	B 159 UNS C51900

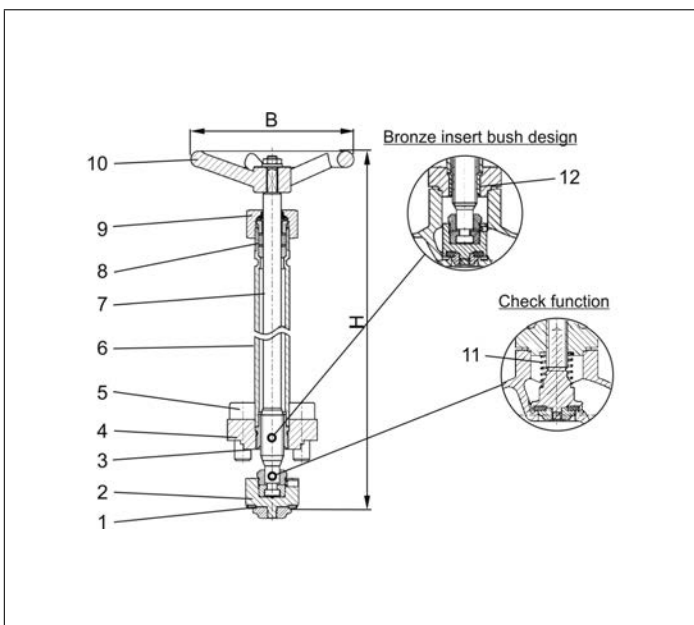

Type 28641	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Height	H	270 mm or 370mm							370	370	370	420
Number of bolts		4	4	4	4	4	4	6	6	6	6	6
Handwheel-Ø	B	100	100	100	100	125	125	125	200	250	315	350
Weight	ca. kg	1.0	1.1	1.4	1.4	2.0	2.4	3.0	5.5	6.8	9.5	18.4

Dimensions in mm.

Edition 2020-02

Spare Parts for Fire Safe and Offshore Applications

Type 28751 - Topwork



for Cryogenic-Globe and Globe/Check Valves

Stainless steel topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 28751.X.0000


Part No. 28751.X.5000 with check function

suitable for:

Type	Nominal size
01751	DN10 - DN100
01755	DN10 - DN50
03751	DN25 - DN150



Materials	DIN EN	ASTM
1 Valve seal	PCTFE (Kel-F)	
2 Disc	1.4401	A 276 Grade 316
3 Bonnet gasket	Graphite	
4 Headpiece	1.4404	A 276 Grade 316L
5 Bolts	1.4571/A4	similar A 194 B8T
6 Stem	1.4401	A 276 Grade 316
7 Gland packing	Graphite / PTFE / MICA	
8 Gland nut	1.4404	A 276 Grade 316L
9 Handwheel	1.4409	A 351 CF3M
10 Spring	1.4571	A 313 Grade 316Ti
11 Bush	CW452K	B 159 UNS C51900

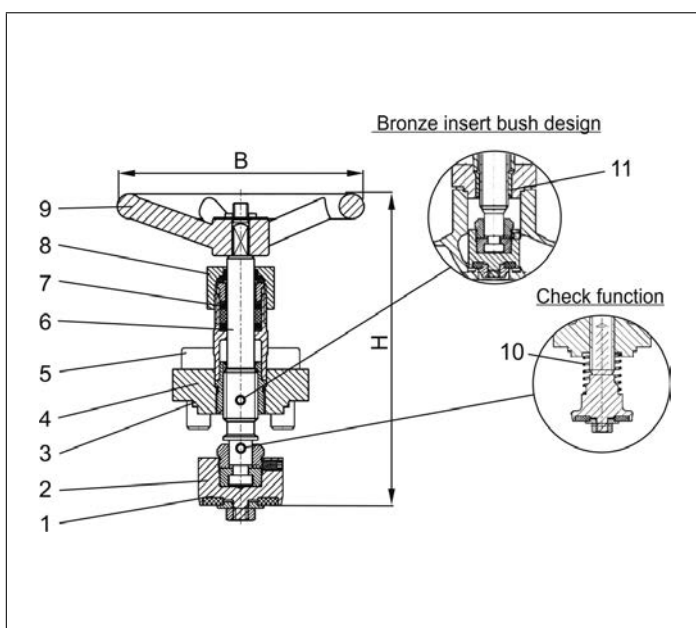

Type 28751	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Height	H	130	130	130	130	155	160	185	240	285	320	380
Number of bolts		4	4	4	4	4	4	6	6	6	6	12
Handwheel-Ø	B	100	100	100	100	125	125	125	200	250	315	360
Weight	ca. kg	0.6	0.7	0.95	1.0	1.5	1.9	2.7	4.8	5.9	8.4	18.0

Dimensions in mm.

Spare Parts for Fire Safe and Offshore Applications

Type 28741 - Topwork



for Cryogenic-Globe and Globe/Check Valves

Stainless steel topwork,
"live loaded" gland packing
"cleaned and degreased for oxygen service"

Part No. 28741.X.0010 (H=270mm)

Part No. 28741.X.0020 (H=370mm)

Part No. 28741.X.5010 (H=270mm) with check function


Part No. 28741.X.5020 (H=370mm) with check function

suitable for:

Type	Nominal size
01741	DN10 - DN150
01745	DN10 - DN50
03741	DN25 - DN150



Materials	DIN EN	ASTM
1 Valve seal	PCTFE (Kel-F)	
2 Disc	1.4401	A 276 Grade 316
3 Bonnet gasket	Graphite	
4 Headpiece	1.4404	A 276 Grade 316L
5 Bolts	1.4571/A4	similar A 194 B8T
6 Elongation tube	1.4571	A 213 TP 316Ti
7 Stem	1.4401	A 276 Grade 316
8 Gland packing	Graphite / PTFE / MICA	
9 Gland nut	1.4404	A 276 Grade 316L
10 Handwheel	1.4409	A 351 CF3M
11 Spring	1.4571	A 313 Grade 316Ti
12 Bush	CW452K	B 159 UNS C51900

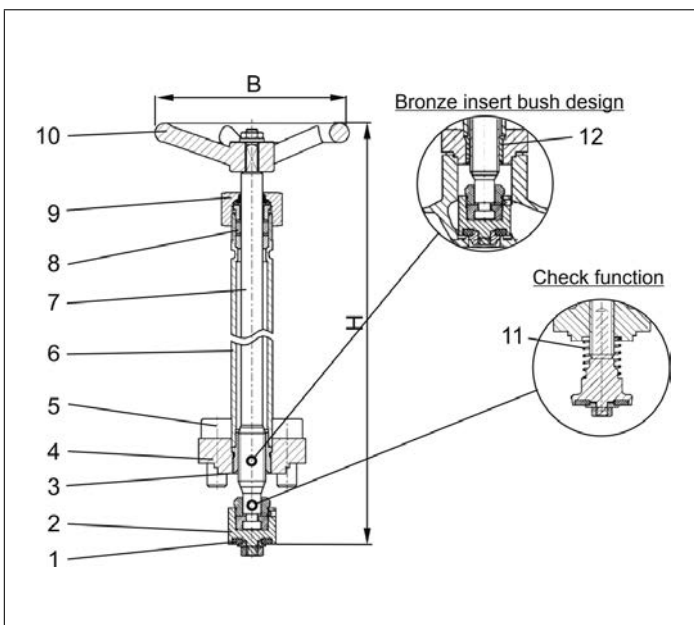

Type 28741	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Height	H	270mm or 370mm							370	370	370	420
Number of bolts		4	4	4	4	4	4	6	6	6	6	12
Handwheel-Ø	B	100	100	100	100	125	125	125	200	250	315	360
Weight	ca. kg	1.0	1.1	1.4	1.4	2.0	2.4	3.0	5.5	6.8	9.5	19.0

Dimensions in mm.

Edition 2020-02

Spare Parts for Fire Safe and Offshore Applications

Type 28851 - Topwork

for Cryogenic-Globe and Globe/Check Valves

"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel topwork,

"live loaded" gland packing

"cleaned and degreased for oxygen service"

Part No. 28851.X.0000


Part No. 28851.X.5000 with check function

suitable for:

Type	Nominal size
01851	DN10 - DN100
01855	DN10 - DN50
03851	DN25 - DN150



Materials	DIN EN	ASTM
1 Valve seal	PTFE / Carbon filled (25%)	
2 Disc	1.4401	A 276 Grade 316
3 Bonnet gasket	Graphite	
4 Headpiece	1.4404	A 276 Grade 316L
5 Bolts	1.4571/A4 similar A 194 B8T	
6 Stem	1.4401	A 276 Grade 316
7 Gland packing	Graphite / PTFE / MICA	
8 Gland nut	1.4404	A 276 Grade 316L
9 Handwheel	1.4409	A 351 CF3M
10 Spring	1.4571	A 313 Grade 316Ti
11 Bush	CW452K	B 159 UNS C51900

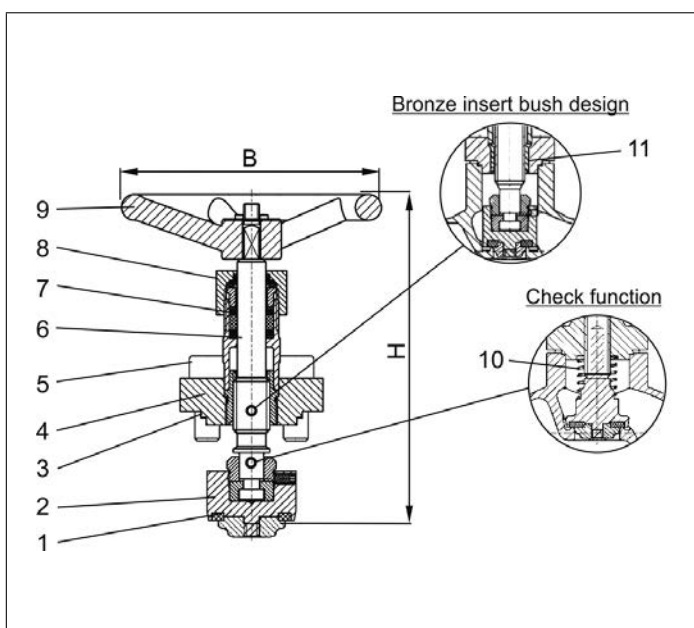

Type 28851	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Height	H	130	130	130	130	155	160	185	240	285	320	380
Number of bolts		4	4	4	4	4	4	6	6	6	6	12
Handwheel-Ø	B	100	100	100	100	125	125	125	200	250	315	360
Weight	ca. kg	0.6	0.7	0.95	1.0	1.5	1.9	2.7	4.8	5.9	8.4	18.0

Dimensions in mm.



Spare Parts for Fire Safe and Offshore Applications

Type 28841 - Topwork

for Cryogenic-Globe and Globe/Check Valves

"Fire safe" type test approval acc. to EN ISO 10497

Stainless steel topwork,

"live loaded" gland packing

"cleaned and degreased for oxygen service"

Part No. 28841.X.0010 (H=270mm)

Part No. 28841.X.0020 (H=370mm)


Part No. 28841.X.5010 (H=270mm) with check function

Part No. 28841.X.5020 (H=370mm) with check function

suitable for:

Type	Nominal size
01841	DN10 - DN100
01845	DN10 - DN50
03841	DN25 - DN150

Materials	DIN EN	ASTM
1 Valve seal	PTFE / Carbon filled (25%)	
2 Disc	1.4401	A 276 Grade 316
3 Bonnet gasket	Graphite	
4 Headpiece	1.4404	A 276 Grade 316L
5 Bolts	1.4571/A4	similar A 194 B8T
6 Elongation tube	1.4571	A 213 TP 316Ti
7 Stem	1.4401	A 276 Grade 316
8 Gland packing	Graphite / PTFE / MICA	
9 Gland nut	1.4404	A 276 Grade 316L
10 Handwheel	1.4409	A 351 CF3M
11 Spring	1.4571	A 313 Grade 316Ti
12 Bush	CW452K	B 159 UNS C51900

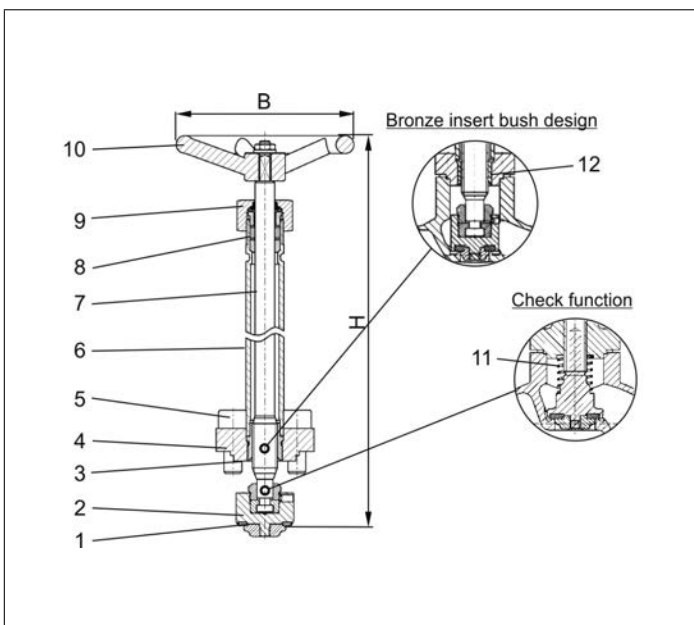

Type 28841	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Height	H	270mm or 370mm							370	370	370	420
Number of bolts		4	4	4	4	4	4	6	6	6	6	12
Handwheel-Ø	B	100	100	100	100	125	125	125	200	250	315	360
Weight	ca. kg	1.0	1.1	1.4	1.4	2.0	2.4	3.0	5.5	6.8	9.5	19.0

Dimensions in mm.

Spare Parts for Fire Safe and Offshore Applications

Type 28203, Type 29203 - Disc complete



for Cryogenic-Globe Valves


stainless steel disc 1.4404

"cleaned and degreased for oxygen service"

Part No. 28203.X.0783

suitable for:

Type	Nominal size
01751, 01741	DN10 - DN150
01755, 01745	DN10 - DN50



Type 28203.X.0783	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Disc Ø	L	23	25	30	34.5	42	47	55	73	86	104	155
Weight	ca. kg	0.05	0.06	0.09	0.12	0.18	0.22	0.30	0.55	0.75	1.05	3.10

Dimensions in mm.

for Cryogenic-Globe Valves


stainless steel disc 1.4301

"cleaned and degreased for oxygen service"

Part No. 29203.X.0765

suitable for:

Type	Nominal size
01651	DN10 - DN100
01641	DN10 - DN200
01655, 01645	DN10 - DN50
03651, 03641	DN25 - DN100



Type 29203.X.0765	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Disc Ø	L	23	25	30	34.5	42	47	55	73	86	104	155
Weight	ca. kg	0.05	0.06	0.09	0.12	0.18	0.22	0.30	0.55	0.75	1.05	3.10

Dimensions in mm.

for Cryogenic-Globe Valves


stainless steel disc 1.4404

"cleaned and degreased for oxygen service"

Part No. 29203.X.0783

suitable for:

Type	Nominal size
01851	DN10 - DN100
01841	DN10 - DN200
01855, 01845	DN10 - DN50
03851, 03841	DN25 - DN150



Type 29203.X.0783	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Disc Ø	L	23	25	30	34.5	42	47	55	73	86	104	155
Weight	ca. kg	0.05	0.06	0.09	0.12	0.18	0.22	0.30	0.55	0.75	1.05	3.10

Dimensions in mm.

Spare Parts for Fire Safe and Offshore Applications

Type 28205, Type 29205 - Check Disc complete



for Cryogenic-Globe/Check Valves


stainless steel check disc 1.4301

"cleaned and degreased for oxygen service"

Part No. 29205.X.5765

suitable for:

Type	Nominal size
01651	DN10 - DN100
01641	DN10 - DN150
01655, 01645	DN10 - DN50
03651, 03641	DN25 - DN150



Type29205.X.5765	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Disc Ø	L	23	25	30	34.5	42	47	55	73	86	104	155
Weight	ca. kg	0.05	0.07	0.09	0.10	0.15	0.20	0.34	0.48	0.66	1.05	3.28

Dimensions in mm.

for Cryogenic-Globe/Check Valves


stainless steel check disc 1.4404

"cleaned and degreased for oxygen service"

Part No. 29205.X.5783

suitable for:

Type	Nominal size
01851	DN10 - DN100
01841	DN10 - DN150
01855, 01845	DN10 - DN50
03851, 03841	DN25 - DN150



Type 29205.X.5783	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Disc Ø	L	23	25	30	34.5	42	47	55	73	86	104	155
Weight	ca. kg	0.05	0.07	0.09	0.10	0.15	0.20	0.34	0.48	0.66	1.05	3.28

Dimensions in mm.

for Cryogenic-Globe/Check Valves


stainless steel check disc 1.4404

"cleaned and degreased for oxygen service"

Part No. 28205.X.5783

suitable for:

Type	Nominal size
01751, 01741	DN10 - DN150
01755, 01745	DN10 - DN50
03751, 03741	DN25 - DN150



Type 28205.X.5783	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Disc Ø	L	23	25	30	34.5	42	47	55	73	86	104	155
Weight	ca. kg	0.05	0.07	0.09	0.10	0.15	0.20	0.34	0.48	0.66	1.05	3.28

Dimensions in mm.

Spare Parts for Fire Safe and Offshore Applications

Type 28206, Type 29206 - Check Disc complete



for Cryogenic-Check Valves


stainless steel check disc 1.4404

"cleaned and degreased for oxygen service"

Part No. 28206.X.0783

suitable for:

Type	Nominal size
05714	DN10 - DN150
05717	DN10 - DN50
05719	DN25 - DN150



Type 28206.X.0783	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Disc Ø	L	23	25	30	34.5	42	47	55	73	86	104	155
Weight	ca. kg	0.05	0.07	0.09	0.10	0.15	0.20	0.34	0.48	0.66	1.05	3.25

Dimensions in mm.

for Cryogenic-Check Valves


stainless steel check disc 1.4301

"cleaned and degreased for oxygen service"

Part No. 29206.X.0765

suitable for:

Type	Nominal size
05614	DN10 - DN150



Type 29206.X.0765	Technical data											
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500
Disc Ø	L	23	25	30	34.5	42	47	55	73	86	104	155
Weight	ca. kg	0.05	0.07	0.09	0.10	0.15	0.20	0.34	0.48	0.66	1.05	3.25

Dimensions in mm.

Spare Parts for Fire Safe and Offshore Applications

Type 30641, 30643 - Sealing spare part kit



for Cryogenic-Globe Valves

"cleaned and degreased for oxygen service"

Part No. 30641.X.0000

Part No. 30643.X.0000

consisting of:



- 1x Bonnet gasket Graphite
- 1x Gland packing kit complete PTFE/Graphite
- 2x Stem gasket Mica

30641.X.0000 suitable for:

Type	Nominal size
01651, 01851	DN10 - DN150
01641, 01841	DN10 - DN200
01655, 01645, 01855, 01845	DN10 - DN50
03651, 03641, 03851, 03841	DN15 - DN150
01643, 01843	DN10 - DN50, DN100, DN200
03643, 03843	DN15 - DN50, DN100, DN200

30643.X.0000 suitable for:

Type	Nominal size
01643, 01843, 03643, 03843	DN65 - DN80, DN150

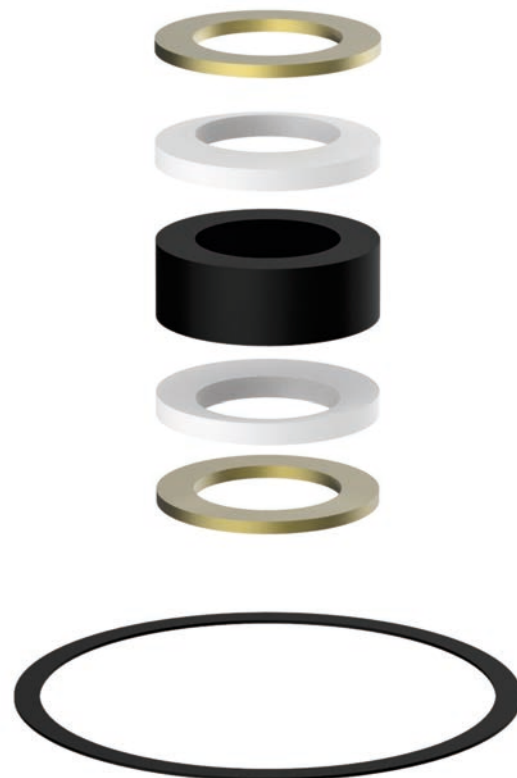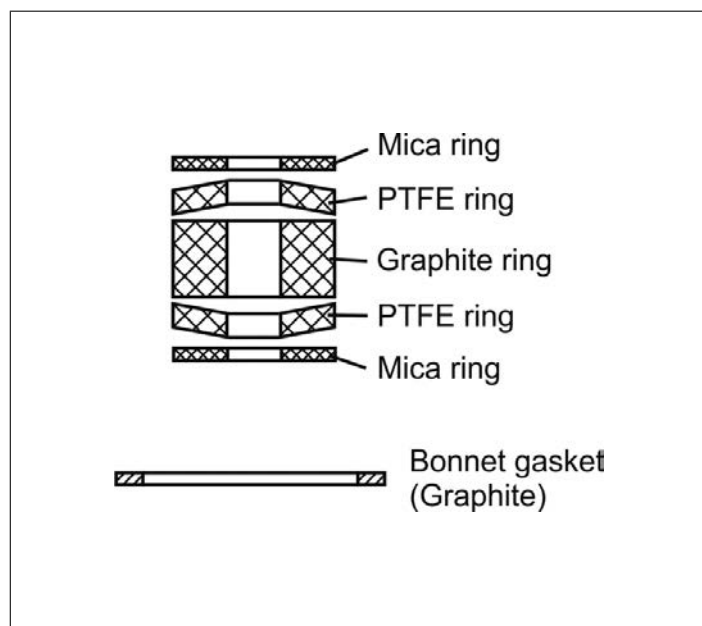

Type 30641/30643	Technical data												
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150	200
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500	2000
Weight	ca. kg	0.04	0.04	0.05	0.06	0.08	0.09	0.14	0.19	0.25	0.34	0.39	1.81

Dimensions in mm.

Spare Parts for Fire Safe and Offshore Applications

Type 30653 - Sealing spare part kit



for Cryogenic-Globe Valves

"cleaned and degreased for oxygen service"



Part No. 30653.X.0000

consisting of:

- 1x Bonnet gasket Graphite
- 1x Gland packing kit complete PTFE/Graphite
- 2x Stem gasket Mica

suitable for:

Type	Nominal size
01653, 01753, 01853, 03653, 03753, 03853	DN15 - DN80

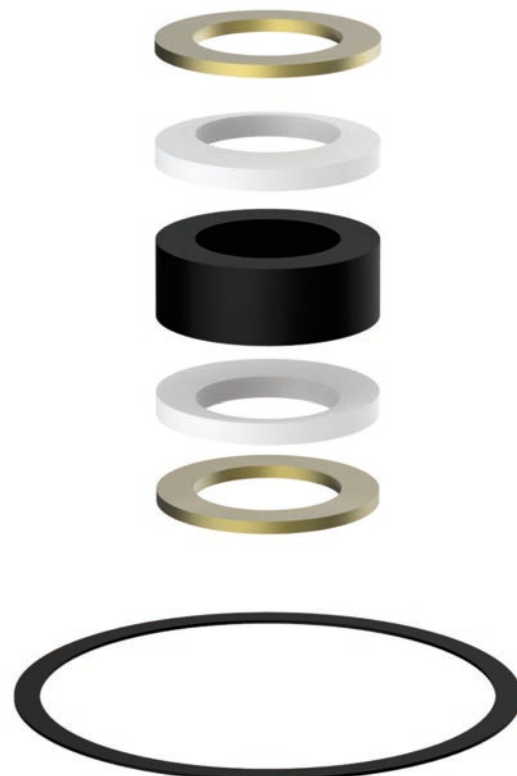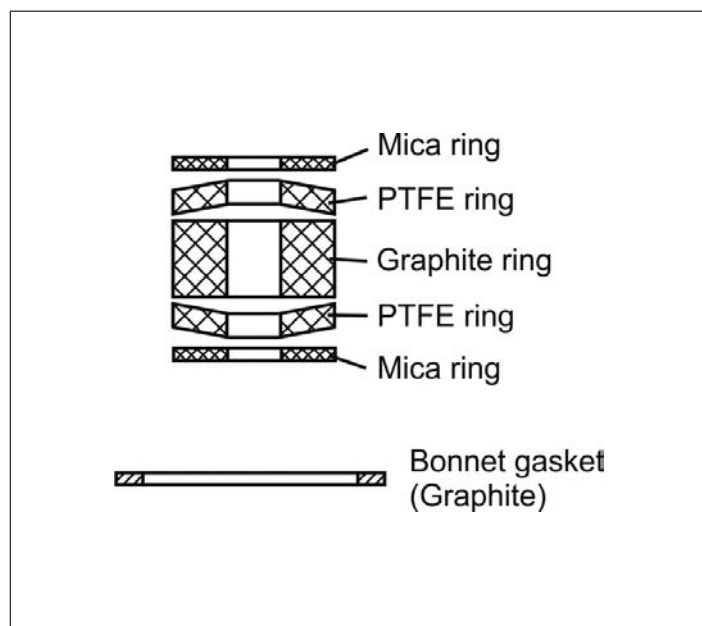

Type 30653	Technical data								
Nominal size	DN	15	20	25	32	40	50	65	80
Dimension code	.X.	0150	0200	0250	0320	0400	0500	0650	0800
Weight	ca. kg	0.04	0.05	0.06	0.08	0.09	0.14	0.19	0.25

Dimensions in mm.

Spare Parts for Fire Safe and Offshore Applications

Type 30741, 30743 - Sealing spare part kit



for Cryogenic-Globe Valves

"cleaned and degreased for oxygen service"

Part No. 30741.X.0000

Part No. 30743.X.0000

consisting of:


- 1x Bonnet gasket Graphite
- 1x Disc seal PCTFE
- 1x Disc nut 1.4571
- 1x Gland packing kit complete PTFE/Graphite
- 2x Stem gasket Mica

30741.X.0000 suitable for:

Type	Nominal size
01751	DN10 - DN150
01741	DN10 - DN200
01755, 01745	DN10 - DN50
03751, 03741	DN15 - DN150
01743, 03743	DN10 - DN50, DN100, DN200

30743.X.0000 suitable for:

Type	Nominal size
01743, 03743	DN65 - DN80, DN150

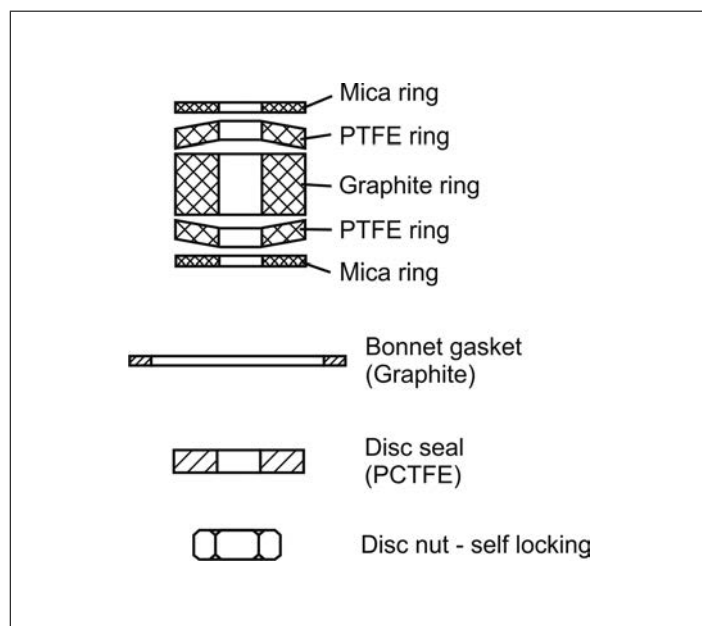

Type 30741/30743	Technical data												
Nominal size	DN	10	15	20	25	32	40	50	65	80	100	150	200
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000	1500	2000
Weight	ca. kg	0.03	0.03	0.04	0.05	0.07	0.08	0.13	0.18	0.24	0.32	0.44	1.81

Dimensions in mm.

Edition 2020-02

Spare Parts for Fire Safe and Offshore Applications

Type 30714 - Sealing spare part kit



for Cryogenic-Check Valves

"cleaned and degreased for oxygen service"


Part No. 30714.X.0000

consisting of:

- 1x Bonnet gasket Graphite
- 1x Disc seal PTFE / Carbon filled (25%)
- 1x Disc nut 1.4571

suitable for:

Type	Nominal size
05714	DN10 - DN150
05717	DN10 - DN50
05719	DN25 - DN150

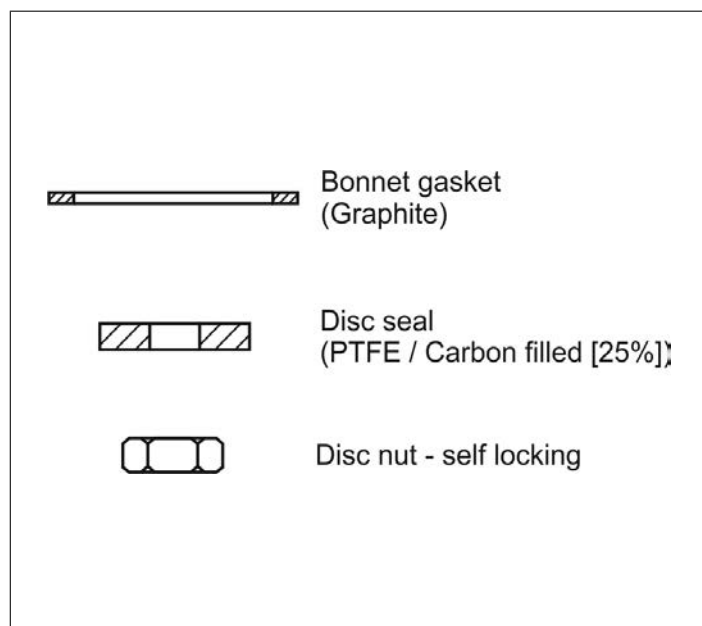

Type 30714	Technical data										
Nominal size	DN	10	15	20	25	32	40	50	65	80	100
Dimension code	.X.	0100	0150	0200	0250	0320	0400	0500	0650	0800	1000
Weight	ca. kg	0.02	0.02	0.03	0.04	0.06	0.07	0.11	0.16	0.22	0.30

Dimensions in mm.

Nonferrous materials

DIN EN new		DIN old		ASTM
CC490K	CuSn3Zn8Pb5-C	RG2	2.1098	-
CC491K	CuSn5Zn5Pb5-C	RG5	2.1096.01	B 62 UNS C83600
CC493K	CuSn7Zn4Pb7-C	RG7	2.1090	B 505 UNS C93200
CW450K	CuSn4	CUSN4	2.1016	B 103 UNS C51100
CW452K	CuSn6	CUSN6	2.1020	B 159 UNS C51900
CW453K	CuSn8	CUSN8	2.1030	B 103 UNS C52100
CW507L	CuZn36	CUZN36	2.0335	B 111 UNS C27000
CW508L	CuZn37	CUZN37	2.0321	B 111 UNS C27200
CW509L	CuZn40	CUZN40	2.0360	B 111 UNS C28000
CW610N	CuZn39Pb0,5	CUZN39PB	2.0372	B 111 UNS C36500
CW612N	CuZn39Pb2	MS58	2.0380.10	B 283 UNS C37770
CW614N	CuZn39Pb3	MS58	2.0401.08	B 283 UNS C38500
CW617N	CuZn40Pb2	MS58	2.0402.20	B 283 UNS C38000
CW710R	CuZn35Ni3Mn2AlPb	CUZN35NI	2.0540	-
CW713R	CuZn37Mn3Al2PbSi	CUZN40AL	2.0552	-
CW718R	CuZn39Mn1AlPbSi	CUZN40AL	2.0561	-
CW720R	CuZn40Mn1Pb1	CUZN40MN	2.0580	-
CW723R	CuZn40Mn2Fe1	CUZN40MN	2.0572	-


Ferrous materials

DIN EN new		DIN old	ASTM
1.1200	Spring steel	Carbon steel	A 227
1.4021	C20Cr13	1.4021	A 276 Grade 420
1.4034	X45Cr13	1.4034	A 276 Grade 420
1.4057	X17CrNi16-2	1.4057	A 276 Grade 431
1.4104	X14CrMoS17	1.4104	A 276 Grade 430F
1.4112	X90CrMoV18	1.4112	A 276 Grade 440B
1.4122	X39CrMo17-1	1.4122	-
1.4300	X12CrNi18-8	1.4300	A 276 Grade 302
1.4301	X5CrNi18-10	1.4301	A 276 Grade 304
1.4305	X8CrNiS18-9	1.4305	A 276 Grade 303
1.4306	X2CrNi19-11	1.4306	A 312 TP 304L
1.4308	G-X6CrNi18-9	1.4308	A 351 CF8
1.4310	X10CrNi18-8	1.4310	A 313 Grade 301
1.4401	X5CrNiMo17-12-2	1.4401	A 276 Grade 316
1.4404	X2CrNiMo17-12-2	1.4404	A 276 Grade 316L
1.4408	GX5CrNiMo19-11-2	1.4408	A 351 CF 8M
1.4409	G-X2NiCrMo28-20-2	1.4409	A 351 CF 3M
1.4541	X6CrNiTi18-10	1.4541	A 276 Grade 321
1.4568	X7CrNiAl17-7	1.4568	A 313 Grade 631
1.4571	X6CrNiMoTi17-12-2	1.4571	A 313 Grade 316Ti
1.4552	G-X7CrNiNb18-9	1.4552	A 351 CF 8C
1.4923	X22CrMoV12-1	1.4923	A 193 Grade B6
1.4980	X5CrNiTi26-15	1.4980	A 286 Grade 660
1.5415	16Mo3	-	A 182 Grade F1
1.7225	42CrMo4	1.7225	A 194 Grade 7
1.7258	24CrMo5	1.7258	A 194 Grade B7
1.7335	13CrMo4-5	1.7335	A 182 Grade F12
1.7380	10CrMo9-10	1.7380	A 182 Grade F22
1.7709	21CrMoV5-7	1.7709	-

Dimensions of DIN flanges



DN = Nominal diameter
D = Diameter of flange
Lk = Diameter of bolt circle
n = Number of holes
d = Diameter of holes




		PN 6				PN 10				PN 16				PN 25				PN 40			
DN		D	Lk	n	d	D	Lk	n	d	D	Lk	n	d	D	Lk	n	d	D	Lk	n	d
10	3/8"	75	50	4	11	90	60	4	14	90	60	4	14	90	60	4	14	90	60	4	14
15	1/2"	80	55	4	11	95	65	4	14	95	65	4	14	95	65	4	14	95	65	4	14
20	3/4"	90	65	4	11	105	75	4	14	105	75	4	14	105	75	4	14	105	75	4	14
25	1"	100	75	4	11	115	85	4	14	115	85	4	14	115	85	4	14	115	85	4	14
32	1-1/4"	120	90	4	14	140	100	4	18	140	100	4	18	140	100	4	18	140	100	4	18
40	1-1/2"	130	100	4	14	150	110	4	18	150	110	4	18	150	110	4	18	150	110	4	18
50	2"	140	110	4	14	165	125	4	18	165	125	4	18	165	125	4	18	165	125	4	18
65	2-1/2"	160	130	4	14	185	145	4	18	185	145	4	18	185	145	8	18	185	145	8	18
80	3"	190	150	4	18	200	160	8	18	200	160	8	18	200	160	8	18	200	160	8	18
100	4"	210	170	4	18	220	180	8	18	220	180	8	18	235	190	8	22	235	190	8	22
125	5"	240	200	8	18	250	210	8	18	250	210	8	18	270	220	8	26	270	220	8	26
150	6"	265	225	8	18	285	240	8	22	285	240	8	22	300	250	8	26	300	250	8	26
200	8"	320	280	8	18	340	295	8	22	340	295	8	22	360	310	12	26	375	320	12	30

		PN 63				PN 100				PN 160				PN 250				PN 320			
DN		D	Lk	n	d	D	Lk	n	d	D	Lk	n	d	D	Lk	n	d	D	Lk	n	d
10	3/8"	100	70	4	14	100	70	4	14	100	70	4	14	125	85	4	18	125	85	4	18
15	1/2"	105	75	4	14	105	75	4	14	105	75	4	14	130	90	4	18	130	90	4	18
20	3/4"	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
25	1"	140	100	4	18	140	100	4	18	140	100	4	18	150	105	4	22	160	115	4	22
32	1-1/4"	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
40	1-1/2"	170	125	4	22	170	125	4	22	170	125	4	22	185	125	4	26	195	145	4	26
50	2"	180	135	4	22	195	145	4	26	195	145	4	26	200	150	8	26	210	160	8	26
65	2-1/2"	205	160	4	22	220	170	8	26	220	170	8	26	230	180	8	26	255	200	8	30
80	3"	215	170	4	22	230	180	8	26	230	180	8	26	255	200	8	30	275	220	8	30
100	4"	250	200	4	22	265	210	8	30	265	210	8	30	300	235	8	30	300	265	8	36

Dimensions of ANSI flanges



DN = Nominal diameter
D = Diameter of flange
Lk = Diameter of bolt circle
n = Number of holes
d = Diameter of holes
B = Flange bore
A_n = Outside diameter butt weld



				Class 150				Class 300			
DN		B	A _n	D	Lk	n	d	D	Lk	n	d
15	1/2"	15.8	21.3	90	60.3	4	15.9	95	66.7	4	15.9
20	3/4"	20.9	26.7	100	69.9	4	15.9	115	82.6	4	19.0
25	1"	26.6	33.4	110	79.4	4	15.9	125	88.9	4	19.0
32	1-1/4"	35.1	42.2	115	88.9	4	15.9	135	98.4	4	19.0
40	1-1/2"	40.9	48.3	125	98.4	4	15.9	155	114.3	4	22.2
50	2"	52.5	60.3	150	120.7	4	19.1	165	127.0	8	19.0
65	2-1/2"	62.7	73.0	180	139.7	4	19.1	190	149.2	8	22.2
80	3"	77.9	88.9	190	152.4	4	19.1	210	168.3	8	22.2
100	4"	102.3	114.3	230	190.5	8	19.1	255	200.0	8	22.2
125	5"	128.2	141.3	255	215.9	8	22.2	280	235.0	8	22.2
150	6"	154.1	168.3	280	241.3	8	22.2	320	269.9	12	22.2
200	8"	202.7	219.1	345	298.5	8	22.2	380	330.2	12	25.4

Standard pipe dimensions, available pipe dimensions



x = Standard pipe dimensions

o = available on request

- = not available resp. project specified option

Stainless steel and copper pipes

DIN EN ISO 1127 - Stainless steel pipe dimensions

Wall thckn. in mm	outside pipe diameter in mm								
	10.0	12.0	17.2	21.3	26.9	33.7	42.4	48.3	60.3
1.0	x	x	-	-	-	-	-	-	-
1.6	-	-	-	o	-	-	-	-	-
2.0	-	o	-	o	-	o	x	o	o
2.3	-	-	x	-	-	-	-	-	-
2.6	-	-	-	x	-	o	-	o	-
2.9	-	-	-	-	x	-	-	-	-
3.2	-	-	-	o	-	x	o	-	-
3.6	-	-	-	-	-	-	-	x	x
4.5	-	-	-	-	-	o	-	-	-

ASTM A312 - Stainless steel pipe dimensions

Wall thickness	outside pipe diameter in mm							
	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
	13.72	17.15	21.34	26.67	33.40	42.16	48.26	60.33
Sch. 5	1.20	1.20	1.72	1.72	1.72	1.72	1.72	1.72
Sch. 10	1.72	1.72	2.11	2.11	2.77	2.77	2.77	2.77
Sch. 40	2.24	2.31	2.77	2.87	3.38	3.56	3.68	3.91

DIN EN 12449 - Copper pipe dimensions

Wall thckn. in mm	outside pipe diameter in mm								
	10.0	12.0	15.0	18.0	22.0	28.0	35.0	42.0	54.0
1.0	x	x	o	-	-	-	-	-	-
1.5	-	-	x	x	x	x	x	x	-
2.0	-	-	-	-	-	-	-	-	x

Standard pipe dimensions, available pipe dimensions



x = Standard pipe dimensions

o = available on request

- = not available resp. project specified option

Stainless steel body - welding connections

DIN EN ISO 1127 - Butt weld connection

Wall thckn. in mm	outside pipe diameter in mm										
	12.0	13.5	15.0	16.0	17.2	18.0	21.3	22.0	26.9	28.0	30.0
1.0	x	-	-	-	-	-	-	-	-	-	-
1.5	-	-	x	x	-	-	-	-	-	o	-
1.6	-	x	-	-	x	o	o	-	o	o	-
2.0	o	-	-	-	o	o	x	o	x	o	x
2.3	-	o	-	-	o	-	-	-	o	-	-
2.6	-	-	-	-	-	-	o	-	o	-	-
2.9	-	-	-	-	-	-	-	-	o	-	-
3.2	-	-	-	-	-	-	o	-	-	-	-
3.6	-	-	-	-	-	-	-	-	-	-	-
4.0	-	-	-	-	-	-	-	-	-	-	-
5.6	-	-	-	-	-	-	-	-	-	-	-
6.3	-	-	-	-	-	-	-	-	-	-	-
7.1	-	-	-	-	-	-	-	-	-	-	-

DIN EN ISO 1127 - Butt weld connection

Wall thckn. in mm	outside pipe diameter in mm										
	33.7	38.0	42.4	48.3	60.3	70.0	76.1	88.9	114.3	168.3	219.1
1.0	-	-	-	-	-	-	-	-	-	-	-
1.5	-	-	-	-	-	-	-	-	-	-	-
1.6	o	-	-	o	o	-	-	-	-	-	-
2.0	x	x	-	x	o	o	-	-	-	-	-
2.3	-	-	-	-	-	-	-	o	-	-	-
2.6	o	-	x	o	x	-	x	-	-	-	-
2.9	-	-	-	-	o	x	o	-	x	-	-
3.2	o	-	-	o	-	-	-	x	-	o	-
3.6	-	-	-	o	-	-	o	-	-	-	-
4.0	-	-	-	-	o	-	-	o	-	-	x
5.6	-	-	-	-	-	-	-	o	-	-	-
6.3	-	-	-	-	-	-	-	-	o	-	-
7.1	-	-	-	-	-	-	-	-	-	x	-

ASTM A312 - Butt weld connection

Wall thckn.	outside pipe diameter in mm												
	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	6"	8"
	13.72	17.15	21.34	26.67	33.40	42.16	48.26	60.33	73.03	88.90	114.3	168.3	219.1
Sch. 5	1.20	1.20	1.72	1.72	1.72	1.72	1.72	1.72	2.11	2.11	2.11	2.77	2.77
Sch. 10	1.72	1.72	2.11	2.11	2.77	2.77	2.77	2.77	3.04	3.04	3.04	3.38	3.76
Sch. 40	2.24	2.31	2.77	2.87	3.38	3.56	3.68	3.91	5.16	5.49	6.02	7.11	8.18

Nowadays, product approvals are essential for many customer applications.
Below is an excerpt of our most important certifications. A detailed list can be found at herose.com.

Type approvals

Approval company	Approval	Mark
TÜV	CE LNG (DIN EN 12567) Fire Safe (DIN EN ISO 10497)	
National Board	ASME / UV	
AQSIQ	Manufacture License of Special Equipment	
VNIINMASH	EAC	
TSSA	CRN	
AAR		
TECKO	GOST-Ukraine	

Classification societies

					
Bureau Veritas	China Classification Society	Det Norske Veritas/ Germanischer Lloyd	Lloyd's Register	American Bureau of Shipping	Registro Italiano Navale
					
Russian Maritime Register of Shipping					

Overview ASME Approvals

Safety Valves



HEROSE Type	Inlet	D ₀	Certificate No.	Media
06002/ 06006/ 06012/ 06016	1/4" up to 1/2"	6 mm	91213	Vapours and Gases
06002/ 06012 „gastight“	1/4" up to 1/2"	6 mm	91246	Vapours and Gases
06381/ 06386/ 06416	1/2" up to 3/4"	10,5 mm	91224	Vapours and Gases
06383/ 06388/ 06413/ 06418	1/2" up to 3/4"	7 mm	91011	Vapours and Gases
06383/ 06388/ 06413/ 06418	1/2" up to 3/4"	10,5 mm	91088	Vapours and Gases
06383/ 06388/ 06413/ 06418	1"	15 mm	91077	Vapours and Gases
06383/ 06388/ 06413/ 06418	1-1/4" up to 1-1/2"	23 mm	91101	Vapours and Gases
06420/ 06421/ 06425/ 06426/ 06440/ 06441/ 06445/ 06446	1/2" up to 3/4"	7 mm	91189	Vapours and Gases
06420/ 06421/ 06425/ 06426/ 06440/ 06441/ 06445/ 06446	1/2" up to 3/4"	10,5 mm	91190	Vapours and Gases
06420/ 06421/ 06425/ 06426/ 06440/ 06441/ 06445/ 06446	3/4" up to 1"	14 mm	91279	Vapours and Gases
06420/ 06421/ 06425/ 06426/ 06440/ 06441/ 06445/ 06446	1" up to 1-1/4"	18 mm	91280	Vapours and Gases
06420/ 06421/ 06425/ 06426/ 06440/ 06441/ 06445/ 06446	1"-1/4"	23 mm	91202	Vapours and Gases

For your notes



For your notes



Horizontal lines for notes

The following terms apply to all purchase agreements and contracts for work and materials concluded between us and our contractual counterparts that are businesses (hereinafter referred to as "Purchaser"), as well as to our offers, even if we do not expressly refer to them in an individual case. Derogations from this general rule are only binding upon us where we expressly confirm them in writing. The Purchaser's terms of purchase shall not be binding upon us, even where we do not expressly object to them.

1. Offer and contract formation

Our offer is subject to change with respect to the price, amount, delivery period and our ability to make delivery until the order is confirmed in writing. Side agreements are only effective if they have been confirmed by us in writing.

2. Scope of delivery

The scope of delivery is specified in the order confirmation with binding effect. With respect to goods that are customised we are allowed to make excess or short deliveries differing from the quantity ordered by up to 10 %.

3. Deliveries and delivery periods

The delivery period shall start on the date when all details of the order have been clarified, but not until the contractual duties to be fulfilled by the Purchaser by that time have been fulfilled. The delivery deadline shall be deemed complied with if the goods have left the warehouse when the deadline is reached or, where shipping is delayed due to reasons for which the Purchaser is responsible, if the notification that the goods are ready to ship is made within the delivery period agreed. Compliance with the delivery period is subject to the condition precedent that we receive correct and timely deliveries from our suppliers.

Timely and appropriately sized partial deliveries are permissible and may be billed separately. If force majeure events, industrial actions or other events that are beyond our control, regardless of whether they are experienced by us or our suppliers, keep us from complying with our duty to deliver the goods, the delivery shall be extended by the duration of the disruption. If it becomes impossible to deliver the goods because of such an event or if the subsequent delivery creates an undue burden for either of the parties, both parties are entitled to rescind the agreement. If performance is delayed or if it is no longer possible to deliver the goods ordered due to reasons for which we are responsible, the Purchaser is entitled to rescind the agreement in accordance with the statutory provisions. Claims for damages are subject to the provisions in Section 12 of these Terms of Sale. If the Purchaser is in default of acceptance, we are entitled to charge the Purchaser a fee for storing the goods for each week of default at a flat rate of 1% of the invoice value per week, with a total of 5 %.

4. Prices

Our prices are quoted ex warehouse, exclusive of the statutory value-added tax.. Packaging costs, loading costs, customs fees, etc. shall be borne by the Purchaser.

5. Shipping/ passing of the risk

Goods are dispatched and shipped at the expense and risk of the Purchaser. The risk shall pass to the Purchaser when the goods leave our premises. Where the dispatch is delayed due to the Purchaser's conduct, the risk shall pass, and the purchase price shall become due, when the Purchaser is notified that the goods are ready to ship.

6. Payment terms

Invoice amounts must be paid within 30 days of the date of invoice without any deduction. If we grant any discounts, they may not be deducted from any new invoices as long as older invoices for which payment is due have not been paid yet. For periods during which the Purchaser is in default of payment or during which payments due are deferred we will charge the default interest at the statutory rate without prejudice to any further claims for damages. Where it becomes apparent after the conclusion of the agreement that our claim for payment is at risk due to the customer's inability to perform and where we have fulfilled the obligations owed by us in return, all of our outstanding claims become due immediately. In this event we are entitled to only make outstanding deliveries against payment of cash or the provision of a security. This does not affect any further statutory claims. The Purchaser has the right to withhold payments, or to offset counterclaims against them, only in so far as the Purchaser's counterclaims are not in dispute or have become final and absolute. This does not apply to counterclaims of the Purchaser which directly seek rectification or to reverse a transaction – owing to a defect we have not corrected, or are unable to correct, by means of remedial performance – and which are based on the same contractual relationship as our claim to payment.

7. Retention of title

We will retain the title to the goods delivered until all outstanding payments due to us under the business relationship, including incidental costs and interest, are settled in full. This also applies until the checks for such payments have cleared. For current accounts, the goods subject to retention of title shall secure our claim to the outstanding balance. Goods subject to retention of title shall be processed and treated on our behalf without creating any obligations for us. If our goods are processed, combined or mixed with other goods that do not belong to us, we are entitled to a co-ownership interest in the new items based on the ratio of the invoice value of the goods subject to retention of title compared to the value of the other goods processed at the time when they are processed, combined or mixed. Where the Purchaser becomes the sole owner of the new item, it already now assigns the co-ownership interest in the new item to us based on the ratio of the invoice value of our goods subject to retention of title compared to the value of the other goods processed at the time when they are processed, combined or mixed and it shall hold the new item in custody for us with the due diligence of a prudent businessman.

The goods delivered, irrespective of whether they are unprocessed or have been processed or combined or mixed, may only be resold by resellers in the ordinary course of business subject to retention of title, and only if the receivables resulting from the resale pass to us. The Purchaser must not pledge or assign goods subject to retention of title as collateral or agree to a prohibition of assignment or an assignment without our consent in the context of factoring. Where execution is levied in respect of the goods subject to retention of title or where our rights are prejudiced by third parties in any other way, the Purchaser must notify us without undue delay. The Purchaser hereby assigns to us in advance all receivables to which it is entitled now or will be entitled later from the resale or on any other legal ground with respect to the goods delivered by us as of the time when they accrue. We accept the assignment. The value of the goods shall be deemed our invoice amount plus a surety surcharge of 10% which is not applied, though, where the rights of third parties conflict with it. If our goods are resold after they have been processed, combined or mixed or if the new item resulting from the processing, combination or mixing is resold, the claim against the Purchaser's customer in the amount of the invoice value of our processed, combined or mixed goods shall be assigned. This also applies if our goods are sold after they have become an essential component of another item by combining or processing them with other items not belonging to us. If the value of the



collateral provided to us exceeds our claims by more than 10 % in total, we have a duty to release collateral (to be selected at our discretion) at the Purchaser's request. Once all outstanding payments due to us under the business relationship have been settled, title to the goods subject to retention of title and the receivables assigned shall pass to the Purchaser. The Purchaser is authorised to collect the purchase price on our behalf until we revoke this authorisation. The Purchaser has a duty to notify its customers of the assignment at our request and to provide the information and documents that are required for exercising our rights vis-à-vis the respective purchaser.

8. Liability for defects

The Purchaser's warranty rights are predicated on the assumption that the Purchaser, where the Purchaser is a businessman ("Kaufmann"), has duly satisfied its obligations to inspect the goods and to give notice of defects pursuant to Section 377 of the German Commercial Code (HGB).

The Purchaser is not entitled to base complaints on excess or short weight due to foundry technology reasons. If there is a defect, we can remedy the defect or provide a replacement, at our option. If the Purchaser asserts claims for defects, it must give us the opportunity and the time required to review the complaint. If the item is defective and if the Purchaser has incorporated said item into another item or attached it to another item in accordance with its nature and type of use, then we – should a claim for subsequent performance be asserted against us – are entitled to choose within a reasonable period of time whether to compensate the Purchaser for the work required to remove the defective product and to install or attach the rectified product or the defect-free replacement product (work), or to carry out this work ourselves or have this work carried out at our expense (self-performance). If we fail to exercise this right within a reasonable period of time, it shall be deemed forfeited. If we opt for self-performance, the Purchaser shall be entitled to specify a reasonable period of time for such performance. Where said time period expires without results, the Purchaser is entitled to carry out the work itself or have it carried out. In this case, our right to self-performance shall be deemed forfeited and the Purchaser may carry out this work at our expense. Our right to object to the kind of subsequent performance due to its disproportionate expense pursuant to Section 439 (4) of the German Civil Code (BGB) remains unaffected. Where this does not apply, we must reimburse the Purchaser for the required costs incurred for the work. Claims for defects pursuant to Section 437 BGB shall become time barred twelve (12) months after the date of delivery. This limitation does not apply to claims for damages, including claims for damages based on the fact that we are in default of performance with respect to the rectification of a defect requested by the Purchaser and owed by us, or with respect to an item that was used for a building in accordance with its customary use. We do not provide any warranty for used products. The provisions in the two foregoing sentences shall not affect the limitation period for recovering from the supplier pursuant to Sections 445b, 478 BGB. Claims for damages based on an injury to the life, body or health of a person caused by defects or claims for damages under the German Product Liability Act (Produkthaftungsgesetz) shall not be limited either by the foregoing provisions. Further claims that are not limited by this provision are other claims for damages under warranty law in the event of gross negligence, intent, or the breach of material contractual duties. Section 12 of these Terms of Sale shall apply in this respect.

9. Returns

Returns that are not based on a statutory claim may only be made free of carriage charges with our express consent. We reserve the right to deduct an amount of at least 30 % of the net value of the goods when we credit the purchase price to compensate for the costs incurred with every return. The Purchaser is free to prove to us that the loss incurred by us due to the return is smaller.

10. Catalogues

The images in our catalogues and brochures are not binding for the actual execution. We reserve the right to change the construction style where this is advisable for technical reasons and does not impair the contractual purpose. Derogations from the measures and weights specified are permissible where they do not jeopardise the contractual purpose or the quality.

11. Copyright

We reserve the proprietary rights and copyrights with respect to catalogues, images, drawings, samples, and other documents. They must not be made available to third parties without our consent and must be returned without undue delay upon request. If an order placed with us infringes upon third party patent, design or trademark rights due to drawings or models submitted to us, all responsibility shall lie with the Purchaser which shall be liable for any resulting damage and loss of profits incurred by us, as the supplier, and shall indemnify us against any claims brought against us by third parties unless it is not responsible for the infringement.

12. General liability

We are only liable for damage that is caused intentionally or through gross negligence. With respect to breaches of material contractual duties we are also liable if they are caused by ordinary negligence. "Material contractual duties" are duties whose fulfilment is essential to the proper performance of the contract and upon whose fulfilment the Purchaser regularly relies and may regularly rely. Our liability is limited to the reasonably foreseeable damage typically incurred with this type of contract unless it is due to an intentional act. The foregoing limitations of liability do not apply to injuries to the life, body or health of a person or in cases of liability pursuant to the German Product Liability Act. The Purchaser's claims for the reimbursement of expenses pursuant to Section 284 BGB are waived to the extent that a claim for damages in lieu of performance is excluded pursuant to the foregoing provisions. The foregoing limitations on liability shall also apply to our employees, management bodies and other vicarious agents.

13. Place of performance, venue, applicable law, miscellaneous

The place of performance for all claims arising under this agreement is our registered office. The legal venue for all disputes with businessmen, legal entities under public law, special funds under public law or persons who do not have a place of general jurisdiction in Germany is the city in which our registered office is located. We are entitled to also, at our option, bring a suit against the Purchaser in the court having jurisdiction over the area in which its registered office is located. If the registered office of the Buyer is located outside of the European Economic Area (EEA) and the European Free Trade Area (EFTA), the two foregoing sentences do not apply. In this event, all disputes arising in connection with the agreement or its validity shall be finally settled in accordance with the rules of arbitration of Deutsche Institution für Schiedsgerichtsbarkeit e.V. (DIS) without recourse to the ordinary courts. The place of arbitration is Hamburg; the language of the proceedings is German. German law applies to the exclusion of the UN Convention on Contracts for the International Sale of Goods (CISG). We store the data generated in the context of the business relationship in accordance with the legal regulations.

HEROSE GMBH
ARMATUREN UND METALLE

Elly-Heuss-Knapp-Strasse 12
23843 Bad Oldesloe
Germany

Phone: +49 4531/509-0
Fax: +49 4531/509-120
info@herose.com

